



THE  
POWER  
TO KNOW.

# SAS<sup>®</sup> 9.2 SQL Procedure User's Guide



The correct bibliographic citation for this manual is as follows: SAS Institute Inc., SAS® 9.2 SQL Procedure User's Guide. Cary, NC: SAS Institute Inc., 2009.

**SAS® 9.2 SQL Procedure User's Guide**

Copyright © 2009, SAS Institute Inc., Cary, NC, USA.

ISBN 978-1-599944-853-9

All rights reserved. Produced in the United States of America.

**For a hard-copy book:** No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, or otherwise, without the prior written permission of the publisher, SAS Institute Inc.

**For a Web download or e-book:** Your use of this publication shall be governed by the terms established by the vendor at the time you acquire this publication.

**U.S. Government Restricted Rights Notice.** Use, duplication, or disclosure of this software and related documentation by the U.S. government is subject to the Agreement with SAS Institute and the restrictions set forth in FAR 52.227-19 Commercial Computer Software-Restricted Rights (June 1987).

SAS Institute Inc., SAS Campus Drive, Cary, North Carolina 27513.

1st electronic book, February 2009

1st printing, February 2009

SAS® Publishing provides a complete selection of books and electronic products to help customers use SAS software to its fullest potential. For more information about our e-books, e-learning products, CDs, and hard-copy books, visit the SAS Publishing Web site at [support.sas.com/publishing](http://support.sas.com/publishing) or call 1-800-727-3228.

SAS® and all other SAS Institute Inc. product or service names are registered trademarks or trademarks of SAS Institute Inc. in the USA and other countries. ® indicates USA registration.


Other brand and product names are registered trademarks or trademarks of their respective companies.

---

# Contents

<b>Chapter 1</b>	<b>△ Introduction to the SQL Procedure</b>	<b>1</b>
What Is SQL?		1
What Is the SQL Procedure?		1
Terminology		2
Comparing PROC SQL with the SAS DATA Step		3
Notes about the Example Tables		5
<b>Chapter 2</b>	<b>△ Retrieving Data from a Single Table</b>	<b>11</b>
Overview of the SELECT Statement		12
Selecting Columns in a Table		14
Creating New Columns		18
Sorting Data		25
Retrieving Rows That Satisfy a Condition		31
Summarizing Data		40
Grouping Data		47
Filtering Grouped Data		51
Validating a Query		53
<b>Chapter 3</b>	<b>△ Retrieving Data from Multiple Tables</b>	<b>55</b>
Introduction		56
Selecting Data from More Than One Table by Using Joins		56
Using Subqueries to Select Data		74
When to Use Joins and Subqueries		80
Combining Queries with Set Operators		81
<b>Chapter 4</b>	<b>△ Creating and Updating Tables and Views</b>	<b>89</b>
Introduction		90
Creating Tables		90
Inserting Rows into Tables		93
Updating Data Values in a Table		96
Deleting Rows		98
Altering Columns		99
Creating an Index		102
Deleting a Table		103
Using SQL Procedure Tables in SAS Software		103
Creating and Using Integrity Constraints in a Table		103
Creating and Using PROC SQL Views		106
<b>Chapter 5</b>	<b>△ Programming with the SQL Procedure</b>	<b>111</b>
Introduction		112
Using PROC SQL Options to Create and Debug Queries		112
Improving Query Performance		116

Accessing SAS System Information by Using DICTIONARY Tables	120
Using SAS Data Set Options with PROC SQL	127
Using PROC SQL with the SAS Macro Facility	128
Formatting PROC SQL Output by Using the REPORT Procedure	136
Accessing a DBMS with SAS/ACCESS Software	137
Using the Output Delivery System with PROC SQL	142
<b>Chapter 6 <math>\triangle</math> Practical Problem-Solving with PROC SQL</b>	<b>145</b>
Overview	146
Computing a Weighted Average	146
Comparing Tables	148
Overlaying Missing Data Values	150
Computing Percentages within Subtotals	152
Counting Duplicate Rows in a Table	153
Expanding Hierarchical Data in a Table	155
Summarizing Data in Multiple Columns	157
Creating a Summary Report	158
Creating a Customized Sort Order	161
Conditionally Updating a Table	163
Updating a Table with Values from Another Table	165
Creating and Using Macro Variables	167
Using PROC SQL Tables in Other SAS Procedures	170
<b>Appendix 1 <math>\triangle</math> Recommended Reading</b>	<b>175</b>
Recommended Reading	175
<b>Glossary</b>	<b>177</b>
<b>Index</b>	<b>181</b>

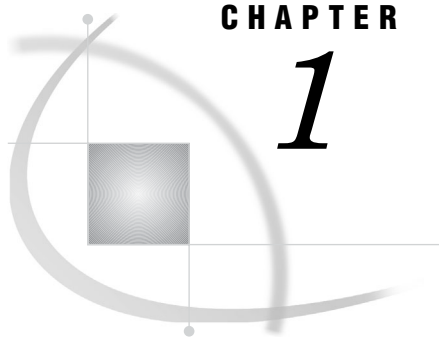

## CHAPTER

# 1

## Introduction to the SQL Procedure

---

<i>What Is SQL?</i>	1
<i>What Is the SQL Procedure?</i>	1
<i>Terminology</i>	2
<i>Tables</i>	2
<i>Queries</i>	2
<i>Views</i>	3
<i>Null Values</i>	3
<i>Comparing PROC SQL with the SAS DATA Step</i>	3
<i>Notes about the Example Tables</i>	5

---

### What Is SQL?

Structured Query Language (SQL) is a standardized, widely used language that retrieves and updates data in relational tables and databases.

A *relation* is a mathematical concept that is similar to the mathematical concept of a set. Relations are represented physically as two-dimensional tables that are arranged in rows and columns. Relational theory was developed by E. F. Codd, an IBM researcher, and first implemented at IBM in a prototype called System R. This prototype evolved into commercial IBM products based on SQL. The Structured Query Language is now in the public domain and is part of many vendors' products.

---

### What Is the SQL Procedure?

The SQL procedure is the Base SAS implementation of Structured Query Language. PROC SQL is part of Base SAS software, and you can use it with any SAS data set (table). Often, PROC SQL can be an alternative to other SAS procedures or the DATA step. You can use SAS language elements such as global statements, data set options, functions, informats, and formats with PROC SQL just as you can with other SAS procedures. PROC SQL can

- generate reports
- generate summary statistics
- retrieve data from tables or views
- combine data from tables or views
- create tables, views, and indexes
- update the data values in PROC SQL tables
- update and retrieve data from database management system (DBMS) tables

- modify a PROC SQL table by adding, modifying, or dropping columns.

PROC SQL can be used in an interactive SAS session or within batch programs, and it can include global statements, such as TITLE and OPTIONS.

---

## Terminology

---

### Tables

A PROC SQL *table* is the same as a SAS data file. It is a SAS file of type DATA. PROC SQL tables consist of rows and columns. The rows correspond to observations in SAS data files, and the columns correspond to variables. The following table lists equivalent terms that are used in SQL, SAS, and traditional data processing.

SQL Term	SAS Term	Data Processing Term
table	SAS data file	file
row	observation	record
column	variable	field

You can create and modify tables by using the SAS DATA step, or by using the PROC SQL statements that are described in Chapter 4, “Creating and Updating Tables and Views,” on page 89. Other SAS procedures and the DATA step can read and update tables that are created with PROC SQL.

SAS data files can have a one-level name or a two-level name. Typically, the names of temporary SAS data files have only one level, and the data files are stored in the WORK library. PROC SQL assumes that SAS data files that are specified with a one-level name are to be read from or written to the WORK library, unless you specify a USER library. You can assign a USER library with a LIBNAME statement or with the SAS system option USER=. For more information about how to work with SAS data files and libraries, see “Temporary and Permanent SAS Data Sets” in the *Base SAS Procedures Guide*.

*DBMS tables* are tables that were created with other software vendors’ database management systems. PROC SQL can connect to, update, and modify DBMS tables, with some restrictions. For more information, see “Accessing a DBMS with SAS/ACCESS Software” on page 137.

---

### Queries

Queries retrieve data from a table, view, or DBMS. A query returns a *query result*, which consists of rows and columns from a table. With PROC SQL, you use a SELECT statement and its subordinate clauses to form a query. Chapter 2, “Retrieving Data from a Single Table,” on page 11 describes how to build a query.

---

## Views

PROC SQL views do not actually contain data as tables do. Rather, a PROC SQL view contains a stored SELECT statement or query. The query executes when you use the view in a SAS procedure or DATA step. When a view executes, it displays data that is derived from existing tables, from other views, or from SAS/ACCESS views. Other SAS procedures and the DATA step can use a PROC SQL view as they would any SAS data file. For more information about views, see Chapter 4, “Creating and Updating Tables and Views,” on page 89.

*Note:* When you process PROC SQL views between a client and a server, getting the correct results depends on the compatibility between the client and server architecture. For more information, see “Accessing a SAS View” in the *SAS/CONNECT User’s Guide*.  $\Delta$

---

## Null Values

According to the ANSI Standard for SQL, a missing value is called a *null value*. It is not the same as a blank or zero value. However, to be compatible with the rest of SAS, PROC SQL treats missing values the same as blanks or zero values, and considers all three to be null values. This important concept comes up in several places in this document.

---

## Comparing PROC SQL with the SAS DATA Step

PROC SQL can perform some of the operations that are provided by the DATA step and the PRINT, SORT, and SUMMARY procedures. The following query displays the total population of all the large countries (countries with population greater than 1 million) on each continent.

```
proc sql;
  title 'Population of Large Countries Grouped by Continent';
  select Continent, sum(Population) as TotPop format=comma15.
  from sql.countries
  where Population gt 1000000
  group by Continent
  order by TotPop;
quit;
```

**Output 1.1** Sample SQL Output

Population of Large Countries Grouped by Continent	
Continent	TotPop
Oceania	3,422,548
Australia	18,255,944
Central America and Caribbean	65,283,910
South America	316,303,397
North America	384,801,818
Africa	706,611,183
Europe	811,680,062
Asia	3,379,469,458

Here is a SAS program that produces the same result.

```

title 'Large Countries Grouped by Continent';
proc summary data=sql.countries;
  where Population > 1000000;
  class Continent;
  var Population;
  output out=sumPop sum=TotPop;
run;

proc sort data=SumPop;
  by totPop;
run;

proc print data=SumPop noobs;
  var Continent TotPop;
  format TotPop comma15.;
  where _type_=1;
run;

```

**Output 1.2** Sample DATA Step Output

Large Countries Grouped by Continent	
Continent	TotPop
Oceania	3,422,548
Australia	18,255,944
Central America and Caribbean	65,283,910
South America	316,303,397
North America	384,801,818
Africa	706,611,183
Europe	811,680,062
Asia	3,379,469,458

This example shows that PROC SQL can achieve the same results as Base SAS software but often with fewer and shorter statements. The SELECT statement that is shown in this example performs summation, grouping, sorting, and row selection. It also displays the query's results without the PRINT procedure.



PROC SQL executes without using the RUN statement. After you invoke PROC SQL you can submit additional SQL procedure statements without submitting the PROC statement again. Use the QUIT statement to terminate the procedure.

---

## Notes about the Example Tables

For all examples, the following global statements are in effect:

```
options nodate nonumber linesize=80 pagesize=60;
libname sql 'SAS-data-library';
```

The tables that are used in this document contain geographic and demographic data. The data is intended to be used for the PROC SQL code examples only; it is not necessarily up-to-date or accurate.

*Note:* You can find instructions for downloading these data sets at <http://ftp.sas.com/samples/A56936>. These data sets are valid for SAS 9 as well as previous versions of SAS.  $\Delta$

The COUNTRIES table contains data that pertains to countries. The Area column contains a country's area in square miles. The UNDate column contains the year a country entered the United Nations, if applicable.

### Output 1.3 COUNTRIES (Partial Output)

COUNTRIES					
Name	Capital	Population	Area	Continent	UNDate
Afghanistan	Kabul	17070323	251825	Asia	1946
Albania	Tirane	3407400	11100	Europe	1955
Algeria	Algiers	28171132	919595	Africa	1962
Andorra	Andorra la Vell	64634	200	Europe	1993
Angola	Luanda	9901050	481300	Africa	1976
Antigua and Barbuda	St. John's	65644	171	Central America	1981
Argentina	Buenos Aires	34248705	1073518	South America	1945
Armenia	Yerevan	3556864	11500	Asia	1992
Australia	Canberra	18255944	2966200	Australia	1945
Austria	Vienna	8033746	32400	Europe	1955
Azerbaijan	Baku	7760064	33400	Asia	1992
Bahamas	Nassau	275703	5400	Central America	1973
Bahrain	Manama	591800	300	Asia	1971
Bangladesh	Dhaka	1.2639E8	57300	Asia	1974
Barbados	Bridgetown	258534	200	Central America	1966

The `WORLDCITYCOORDS` table contains latitude and longitude data for world cities. Cities in the Western hemisphere have negative longitude coordinates. Cities in the Southern hemisphere have negative latitude coordinates. Coordinates are rounded to the nearest degree.

**Output 1.4** `WORLDCITYCOORDS` (Partial Output)

WORLDCITYCOORDS			
City	Country	Latitude	Longitude
Kabul	Afghanistan	35	69
Algiers	Algeria	37	3
Buenos Aires	Argentina	-34	-59
Cordoba	Argentina	-31	-64
Tucuman	Argentina	-27	-65
Adelaide	Australia	-35	138
Alice Springs	Australia	-24	134
Brisbane	Australia	-27	153
Darwin	Australia	-12	131
Melbourne	Australia	-38	145
Perth	Australia	-32	116
Sydney	Australia	-34	151
Vienna	Austria	48	16
Nassau	Bahamas	26	-77
Chittagong	Bangladesh	22	92

The `USCITYCOORDS` table contains the coordinates for cities in the United States. Because all cities in this table are in the Western hemisphere, all of the longitude coordinates are negative. Coordinates are rounded to the nearest degree.

**Output 1.5** `USCITYCOORDS` (Partial Output)

USCITYCOORDS			
City	State	Latitude	Longitude
Albany	NY	43	-74
Albuquerque	NM	36	-106
Amarillo	TX	35	-102
Anchorage	AK	61	-150
Annapolis	MD	39	-77
Atlanta	GA	34	-84
Augusta	ME	44	-70
Austin	TX	30	-98
Baker	OR	45	-118
Baltimore	MD	39	-76
Bangor	ME	45	-69
Baton Rouge	LA	31	-91
Birmingham	AL	33	-87
Bismarck	ND	47	-101
Boise	ID	43	-116

The UNITEDSTATES table contains data that is associated with the states. The Statehood column contains the date when the state was admitted into the Union.

**Output 1.6** UNITEDSTATES (Partial Output)

UNITEDSTATES					
Name	Capital	Population	Area	Continent	Statehood
Alabama	Montgomery	4227437	52423	North America	14DEC1819
Alaska	Juneau	604929	656400	North America	03JAN1959
Arizona	Phoenix	3974962	114000	North America	14FEB1912
Arkansas	Little Rock	2447996	53200	North America	15JUN1836
California	Sacramento	31518948	163700	North America	09SEP1850
Colorado	Denver	3601298	104100	North America	01AUG1876
Connecticut	Hartford	3309742	5500	North America	09JAN1788
Delaware	Dover	707232	2500	North America	07DEC1787
District of Colum	Washington	612907	100	North America	21FEB1871
Florida	Tallahassee	13814408	65800	North America	03MAR1845
Georgia	Atlanta	6985572	59400	North America	02JAN1788
Hawaii	Honolulu	1183198	10900	Oceania	21AUG1959
Idaho	Boise	1109980	83600	North America	03JUL1890
Illinois	Springfield	11813091	57900	North America	03DEC1818
Indiana	Indianapolis	5769553	36400	North America	11DEC1816

The POSTALCODES table contains postal code abbreviations.

**Output 1.7** POSTALCODES (Partial Output)

POSTALCODES	
Name	Code
Alabama	AL
Alaska	AK
American Samoa	AS
Arizona	AZ
Arkansas	AR
California	CA
Colorado	CO
Connecticut	CT
Delaware	DE
District Of Columbia	DC
Florida	FL
Georgia	GA
Guam	GU
Hawaii	HI
Idaho	ID

The WORLDTEMPS table contains average high and low temperatures from various international cities.

**Output 1.8** WORLDTEMPS (Partial Output)

WORLDTEMPS			
City	Country	AvgHigh	AvgLow
Algiers	Algeria	90	45
Amsterdam	Netherlands	70	33
Athens	Greece	89	41
Auckland	New Zealand	75	44
Bangkok	Thailand	95	69
Beijing	China	86	17
Belgrade	Yugoslavia	80	29
Berlin	Germany	75	25
Bogota	Colombia	69	43
Bombay	India	90	68
Bucharest	Romania	83	24
Budapest	Hungary	80	25
Buenos Aires	Argentina	87	48
Cairo	Egypt	95	48
Calcutta	India	97	56

The OILPROD table contains oil production statistics from oil-producing countries.

**Output 1.9** OILPROD (Partial Output)

OILPROD	
Country	Barrels PerDay
Algeria	1,400,000
Canada	2,500,000
China	3,000,000
Egypt	900,000
Indonesia	1,500,000
Iran	4,000,000
Iraq	600,000
Kuwait	2,500,000
Libya	1,500,000
Mexico	3,400,000
Nigeria	2,000,000
Norway	3,500,000
Oman	900,000
Saudi Arabia	9,000,000
United States of America	8,000,000

The OILRSRVS table lists approximate oil reserves of oil-producing countries.

**Output 1.10** OILRSRVS (Partial Output)

OILRSRVS	
Country	Barrels
Algeria	9,200,000,000
Canada	7,000,000,000
China	25,000,000,000
Egypt	4,000,000,000
Gabon	1,000,000,000
Indonesia	5,000,000,000
Iran	90,000,000,000
Iraq	110,000,000,000
Kuwait	95,000,000,000
Libya	30,000,000,000
Mexico	50,000,000,000
Nigeria	16,000,000,000
Norway	11,000,000,000
Saudi Arabia	260,000,000,000
United Arab Emirates	100,000,000

The CONTINENTS table contains geographic data that relates to world continents.


**Output 1.11** CONTINENTS

CONTINENTS					
Name	Area	HighPoint	Height	LowPoint	Depth
Africa	11506000	Kilimanjaro	19340	Lake Assal	-512
Antarctica	5500000	Vinson Massif	16860	.	.
Asia	16988000	Everest	29028	Dead Sea	-1302
Australia	2968000	Kosciusko	7310	Lake Eyre	-52
Central America	.	.	.	.	.
Europe	3745000	El'brus	18510	Caspian Sea	-92
North America	9390000	McKinley	20320	Death Valley	-282
Oceania	.	.	.	.	.
South America	6795000	Aconcagua	22834	Valdes Peninsul	-131

The FEATURES table contains statistics that describe various types of geographical features, such as oceans, lakes, and mountains.

**Output 1.12** FEATURES (Partial Output)

FEATURES						
Name	Type	Location	Area	Height	Depth	Length
Aconcagua	Mountain	Argentina	.	22834	.	.
Amazon	River	South America	.	.	.	4000
Amur	River	Asia	.	.	.	2700
Andaman	Sea		218100	.	3667	.
Angel Falls	Waterfall	Venezuela	.	3212	.	.
Annapurna	Mountain	Nepal	.	26504	.	.
Aral Sea	Lake	Asia	25300	.	222	.
Ararat	Mountain	Turkey	.	16804	.	.
Arctic	Ocean		5105700	.	17880	.
Atlantic	Ocean		33420000	.	28374	.
Baffin	Island	Arctic	183810	.	.	.
Baltic	Sea		146500	.	180	.
Baykal	Lake	Russia	11780	.	5315	.
Bering	Sea		873000	.	4893	.
Black	Sea		196100	.	3906	.

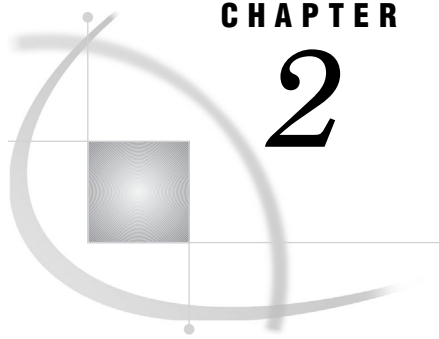

## CHAPTER

## 2

# Retrieving Data from a Single Table

<i>Overview of the SELECT Statement</i>	12
<i>SELECT and FROM Clauses</i>	12
<i>WHERE Clause</i>	13
<i>ORDER BY Clause</i>	13
<i>GROUP BY Clause</i>	13
<i>HAVING Clause</i>	13
<i>Ordering the SELECT Statement</i>	14
<i>Selecting Columns in a Table</i>	14
<i>Selecting All Columns in a Table</i>	14
<i>Selecting Specific Columns in a Table</i>	15
<i>Eliminating Duplicate Rows from the Query Results</i>	16
<i>Determining the Structure of a Table</i>	17
<i>Creating New Columns</i>	18
<i>Adding Text to Output</i>	18
<i>Calculating Values</i>	19
<i>Assigning a Column Alias</i>	20
<i>Referring to a Calculated Column by Alias</i>	21
<i>Assigning Values Conditionally</i>	21
<i>Using a Simple CASE Expression</i>	22
<i>Using the CASE-OPERAND Form</i>	23
<i>Replacing Missing Values</i>	24
<i>Specifying Column Attributes</i>	24
<i>Sorting Data</i>	25
<i>Sorting by Column</i>	26
<i>Sorting by Multiple Columns</i>	26
<i>Specifying a Sort Order</i>	27
<i>Sorting by Calculated Column</i>	28
<i>Sorting by Column Position</i>	29
<i>Sorting by Columns That Are Not Selected</i>	29
<i>Specifying a Different Sorting Sequence</i>	30
<i>Sorting Columns That Contain Missing Values</i>	30
<i>Retrieving Rows That Satisfy a Condition</i>	31
<i>Using a Simple WHERE Clause</i>	31
<i>Retrieving Rows Based on a Comparison</i>	32
<i>Retrieving Rows That Satisfy Multiple Conditions</i>	33
<i>Using Other Conditional Operators</i>	34
<i>Using the IN Operator</i>	35
<i>Using the IS MISSING Operator</i>	36
<i>Using the BETWEEN-AND Operators</i>	36
<i>Using the LIKE Operator</i>	37
<i>Using Truncated String Comparison Operators</i>	38

<i>Using a WHERE Clause with Missing Values</i>	38
<i>Summarizing Data</i>	40
<i>Using Aggregate Functions</i>	40
<i>Summarizing Data with a WHERE Clause</i>	41
<i>Using the MEAN Function with a WHERE Clause</i>	41
<i>Displaying Sums</i>	42
<i>Combining Data from Multiple Rows into a Single Row</i>	42
<i>Remerging Summary Statistics</i>	42
<i>Using Aggregate Functions with Unique Values</i>	44
<i>Counting Unique Values</i>	44
<i>Counting Nonmissing Values</i>	45
<i>Counting All Rows</i>	45
<i>Summarizing Data with Missing Values</i>	45
<i>Finding Errors Caused by Missing Values</i>	46
<i>Grouping Data</i>	47
<i>Grouping by One Column</i>	47
<i>Grouping without Summarizing</i>	47
<i>Grouping by Multiple Columns</i>	48
<i>Grouping and Sorting Data</i>	49
<i>Grouping with Missing Values</i>	50
<i>Finding Grouping Errors Caused by Missing Values</i>	50
<i>Filtering Grouped Data</i>	51
<i>Using a Simple HAVING Clause</i>	51
<i>Choosing between HAVING and WHERE</i>	52
<i>Using HAVING with Aggregate Functions</i>	53
<i>Validating a Query</i>	53

---

## Overview of the SELECT Statement

This chapter shows you how to

- retrieve data from a single table by using the SELECT statement
- validate the correctness of a SELECT statement by using the VALIDATE statement.

With the SELECT statement, you can retrieve data from tables or data that is described by SAS data views.

*Note:* The examples in this chapter retrieve data from tables that are SAS data sets. However, you can use all of the operations that are described here with SAS data views.  $\Delta$

The SELECT statement is the primary tool of PROC SQL. You use it to identify, retrieve, and manipulate columns of data from a table. You can also use several optional clauses within the SELECT statement to place restrictions on a query.

---

### SELECT and FROM Clauses

The following simple SELECT statement is sufficient to produce a useful result:

```
select Name
    from sql.countries;
```

The SELECT statement must contain a SELECT clause and a FROM clause, both of which are required in a PROC SQL query. This SELECT statement contains



- a SELECT clause that lists the Name column
- a FROM clause that lists the table in which the Name column resides.

---

## WHERE Clause

The WHERE clause enables you to restrict the data that you retrieve by specifying a condition that each row of the table must satisfy. PROC SQL output includes only those rows that satisfy the condition. The following SELECT statement contains a WHERE clause that restricts the query output to only those countries that have a population that is greater than 5,000,000 people:

```
select Name
      from sql.countries
     where Population gt 5000000;
```

---

## ORDER BY Clause

The ORDER BY clause enables you to sort the output from a table by one or more columns; that is, you can put character values in either ascending or descending alphabetical order, and you can put numerical values in either ascending or descending numerical order. The default order is ascending. For example, you can modify the previous example to list the data by descending population:

```
select Name
      from sql.countries
     where Population gt 5000000
     order by Population desc;
```

---

## GROUP BY Clause

The GROUP BY clause enables you to break query results into subsets of rows. When you use the GROUP BY clause, you use an aggregate function in the SELECT clause or a HAVING clause to instruct PROC SQL how to group the data. For details about aggregate functions, see “Summarizing Data” on page 40. PROC SQL calculates the aggregate function separately for each group. When you do not use an aggregate function, PROC SQL treats the GROUP BY clause as if it were an ORDER BY clause, and any aggregate functions are applied to the entire table.

The following query uses the SUM function to list the total population of each continent. The GROUP BY clause groups the countries by continent, and the ORDER BY clause puts the continents in alphabetical order:

```
select Continent, sum(Population)
      from sql.countries
     group by Continent
     order by Continent;
```

---

## HAVING Clause

The HAVING clause works with the GROUP BY clause to restrict the groups in a query’s results based on a given condition. PROC SQL applies the HAVING condition after grouping the data and applying aggregate functions. For example, the following

query restricts the groups to include only the continents of Asia and Europe:

```
select Continent, sum(Population)
  from sql.countries
  group by Continent
  having Continent in ('Asia', 'Europe')
  order by Continent;
```

---

## Ordering the SELECT Statement

When you construct a SELECT statement, you must specify the clauses in the following order:

- 1 SELECT
- 2 FROM
- 3 WHERE
- 4 GROUP BY
- 5 HAVING
- 6 ORDER BY

*Note:* Only the SELECT and FROM clauses are required.  $\Delta$

The PROC SQL SELECT statement and its clauses are discussed in further detail in the following sections.

---

## Selecting Columns in a Table

When you retrieve data from a table, you can select one or more columns by using variations of the basic SELECT statement.

---

### Selecting All Columns in a Table

Use an asterisk in the SELECT clause to select all columns in a table. The following example selects all columns in the SQL.USCITYCOORDS table, which contains latitude and longitude values for U.S. cities:

```
proc sql outobs=12;
  title 'U.S. Cities with Their States and Coordinates';
  select *
  from sql.uscitycoords;
```

*Note:* The OUTOBS= option limits the number of rows (observations) in the output. OUTOBS= is similar to the OBS= data set option. OUTOBS= is used throughout this document to limit the number of rows that are displayed in examples.  $\Delta$

*Note:* In the tables used in these examples, latitude values that are south of the Equator are negative. Longitude values that are west of the Prime Meridian are also negative.  $\Delta$

**Output 2.1** Selecting All Columns in a Table

U.S. Cities with Their States and Coordinates			
City	State	Latitude	Longitude
Albany	NY	43	-74
Albuquerque	NM	36	-106
Amarillo	TX	35	-102
Anchorage	AK	61	-150
Annapolis	MD	39	-77
Atlanta	GA	34	-84
Augusta	ME	44	-70
Austin	TX	30	-98
Baker	OR	45	-118
Baltimore	MD	39	-76
Bangor	ME	45	-69
Baton Rouge	LA	31	-91

*Note:* When you select all columns, PROC SQL displays the columns in the order in which they are stored in the table.  $\Delta$

---

## Selecting Specific Columns in a Table

To select a specific column in a table, list the name of the column in the SELECT clause. The following example selects only the City column in the SQL.USCITYCOORDS table:

```
proc sql outobs=12;
  title 'Names of U.S. Cities';
  select City
  from sql.uscitycoords;
```

**Output 2.2** Selecting One Column

Names of U.S. Cities
City
Albany
Albuquerque
Amarillo
Anchorage
Annapolis
Atlanta
Augusta
Austin
Baker
Baltimore
Bangor
Baton Rouge

If you want to select more than one column, then you must separate the names of the columns with commas, as in this example, which selects the City and State columns in the SQL.USCITYCOORDS table:

```
proc sql outobs=12;
  title 'U.S. Cities and Their States';
  select City, State
  from sql.uscitycoords;
```

### Output 2.3 Selecting Multiple Columns

U.S. Cities and Their States	
City	State
-----	
Albany	NY
Albuquerque	NM
Amarillo	TX
Anchorage	AK
Annapolis	MD
Atlanta	GA
Augusta	ME
Austin	TX
Baker	OR
Baltimore	MD
Bangor	ME
Baton Rouge	LA

*Note:* When you select specific columns, PROC SQL displays the columns in the order in which you specify them in the SELECT clause.  $\triangle$

---

## Eliminating Duplicate Rows from the Query Results

In some cases, you might want to find only the unique values in a column. For example, if you want to find the unique continents in which U.S. states are located, then you might begin by constructing the following query:

```
proc sql outobs=12;
  title 'Continents of the United States';
  select Continent
  from sql.unitedstates;
```

**Output 2.4** Selecting a Column with Duplicate Values

```

                                Continents of the United States
                                Continent
                                -----
                                North America
                                North America
                                North America
                                North America
                                North America
                                North America
                                North America
                                North America
                                North America
                                North America
                                North America
                                Oceania

```

You can eliminate the duplicate rows from the results by using the `DISTINCT` keyword in the `SELECT` clause. Compare the previous example with the following query, which uses the `DISTINCT` keyword to produce a single row of output for each continent that is in the `SQL.UNITEDSTATES` table:

```

proc sql;
  title 'Continents of the United States';
  select distinct Continent
    from sql.unitedstates;

```

**Output 2.5** Eliminating Duplicate Values

```

                                Continents of the United States
                                Continent
                                -----
                                North America
                                Oceania

```

*Note:* When you specify all of a table's columns in a `SELECT` clause with the `DISTINCT` keyword, PROC SQL eliminates duplicate rows, or rows in which the values in all of the columns match, from the results.  $\Delta$

---

## Determining the Structure of a Table

To obtain a list of all of the columns in a table and their attributes, you can use the `DESCRIBE TABLE` statement. The following example generates a description of the `SQL.UNITEDSTATES` table. PROC SQL writes the description to the log.

```

proc sql;
  describe table sql.unitedstates;

```

**Output 2.6** Determining the Structure of a Table (Partial Log)

```
NOTE: SQL table SQL.UNITEDSTATES was created like:

create table SQL.UNITEDSTATES( bufsize=12288 )
(
  Name char(35) format=$35. informat=$35. label='Name',
  Capital char(35) format=$35. informat=$35. label='Capital',
  Population num format=BEST8. informat=BEST8. label='Population',
  Area num format=BEST8. informat=BEST8.,
  Continent char(35) format=$35. informat=$35. label='Continent',
  Statehood num
);
```

---

## Creating New Columns

In addition to selecting columns that are stored in a table, you can create new columns that exist for the duration of the query. These columns can contain text or calculations. PROC SQL writes the columns that you create as if they were columns from the table.

---

### Adding Text to Output

You can add text to the output by including a string expression, or literal expression, in a query. The following query includes two strings as additional columns in the output:

```
proc sql outobs=12;
  title 'U.S. Postal Codes';
  select 'Postal code for', Name, 'is', Code
  from sql.postalcodes;
```

**Output 2.7** Adding Text to Output

```

                                U.S. Postal Codes
                                -----
                                Name                                     Code
-----
Postal code for Alabama                                     is AL
Postal code for Alaska                                     is AK
Postal code for American Samoa                             is AS
Postal code for Arizona                                    is AZ
Postal code for Arkansas                                   is AR
Postal code for California                                 is CA
Postal code for Colorado                                   is CO
Postal code for Connecticut                               is CT
Postal code for Delaware                                  is DE
Postal code for District Of Columbia                     is DC
Postal code for Florida                                    is FL
Postal code for Georgia                                    is GA
```

To prevent the column headings Name and Code from printing, you can assign a label that starts with a special character to each of the columns. PROC SQL does not output the column name when a label is assigned, and it does not output labels that begin with special characters. For example, you could use the following query to suppress the column headings that PROC SQL displayed in the previous example:

```
proc sql outobs=12;
  title 'U.S. Postal Codes';
  select 'Postal code for', Name label='#', 'is', Code label='#'
  from sql.postalcodes;
```

### Output 2.8 Suppressing Column Headings in Output

U.S. Postal Codes			
-----			
Postal code for	Alabama	is	AL
Postal code for	Alaska	is	AK
Postal code for	American Samoa	is	AS
Postal code for	Arizona	is	AZ
Postal code for	Arkansas	is	AR
Postal code for	California	is	CA
Postal code for	Colorado	is	CO
Postal code for	Connecticut	is	CT
Postal code for	Delaware	is	DE
Postal code for	District Of Columbia	is	DC
Postal code for	Florida	is	FL
Postal code for	Georgia	is	GA

## Calculating Values

You can perform calculations with values that you retrieve from numeric columns. The following example converts temperatures in the SQL.WORLDTEMPS table from Fahrenheit to Celsius:

```
proc sql outobs=12;
  title 'Low Temperatures in Celsius';
  select City, (AvgLow - 32) * 5/9 format=4.1
  from sql.worldtemps;
```

*Note:* This example uses the FORMAT attribute to modify the format of the calculated output. See “Specifying Column Attributes” on page 24 for more information.  $\Delta$

**Output 2.9** Calculating Values

Low Temperatures in Celsius	
City	
Algiers	7.2
Amsterdam	0.6
Athens	5.0
Auckland	6.7
Bangkok	20.6
Beijing	-8.3
Belgrade	-1.7
Berlin	-3.9
Bogota	6.1
Bombay	20.0
Bucharest	-4.4
Budapest	-3.9

**Assigning a Column Alias**

By specifying a column alias, you can assign a new name to any column within a PROC SQL query. The new name must follow the rules for SAS names. The name persists only for that query.

When you use an alias to name a column, you can use the alias to reference the column later in the query. PROC SQL uses the alias as the column heading in output. The following example assigns an alias of LowCelsius to the calculated column from the previous example:

```
proc sql outobs=12;
  title 'Low Temperatures in Celsius';
  select City, (AvgLow - 32) * 5/9 as LowCelsius format=4.1
  from sql.worldtemps;
```

**Output 2.10** Assigning a Column Alias to a Calculated Column

Low Temperatures in Celsius	
City	LowCelsius
Algiers	7.2
Amsterdam	0.6
Athens	5.0
Auckland	6.7
Bangkok	20.6
Beijing	-8.3
Belgrade	-1.7
Berlin	-3.9
Bogota	6.1
Bombay	20.0
Bucharest	-4.4
Budapest	-3.9



## Referring to a Calculated Column by Alias

When you use a column alias to refer to a calculated value, you must use the `CALCULATED` keyword with the alias to inform `PROC SQL` that the value is calculated within the query. The following example uses two calculated values, `LowC` and `HighC`, to calculate a third value, `Range`:

```
proc sql outobs=12;
  title 'Range of High and Low Temperatures in Celsius';
  select City, (AvgHigh - 32) * 5/9 as HighC format=5.1,
         (AvgLow - 32) * 5/9 as LowC format=5.1,
         (calculated HighC - calculated LowC)
         as Range format=4.1
  from sql.worldtemps;
```

*Note:* You can specify a calculated column only in a `SELECT` clause or a `WHERE` clause.  $\Delta$

**Output 2.11** Referring to a Calculated Column by Alias

Range of High and Low Temperatures in Celsius			
City	HighC	LowC	Range
Algiers	32.2	7.2	25.0
Amsterdam	21.1	0.6	20.6
Athens	31.7	5.0	26.7
Auckland	23.9	6.7	17.2
Bangkok	35.0	20.6	14.4
Beijing	30.0	-8.3	38.3
Belgrade	26.7	-1.7	28.3
Berlin	23.9	-3.9	27.8
Bogota	20.6	6.1	14.4
Bombay	32.2	20.0	12.2
Bucharest	28.3	-4.4	32.8
Budapest	26.7	-3.9	30.6

*Note:* Because this query sets a numeric format of 4.1 on the `HighC`, `LowC`, and `Range` columns, the values in those columns are rounded to the nearest tenth. As a result of the rounding, some of the values in the `HighC` and `LowC` columns do not reflect the range value output for the `Range` column. When you round numeric data values, this type of error sometimes occurs. If you want to avoid this problem, then you can specify additional decimal places in the format.  $\Delta$

## Assigning Values Conditionally

`CASE` expressions enable you to interpret and change some or all of the data values in a column to make the data more useful or meaningful.

## Using a Simple CASE Expression

You can use conditional logic within a query by using a CASE expression to conditionally assign a value. You can use a CASE expression anywhere that you can use a column name.

The following table, which is used in the next example, describes the world climate zones (rounded to the nearest degree) that exist between Location 1 and Location 2:

**Table 2.1** World Climate Zones

Climate zone	Location 1	Latitude at Location 1	Location 2	Latitude at Location 2
North Frigid	North Pole	90	Arctic Circle	67
North Temperate	Arctic Circle	67	Tropic of Cancer	23
Torrid	Tropic of Cancer	23	Tropic of Capricorn	-23
South Temperate	Tropic of Capricorn	-23	Antarctic Circle	-67
South Frigid	Antarctic Circle	-67	South Pole	-90

In this example, a CASE expression determines the climate zone for each city based on the value in the Latitude column in the SQL.WORLDCITYCOORDS table. The query also assigns an alias of ClimateZone to the value. You must close the CASE logic with the END keyword.

```
proc sql outobs=12;
  title 'Climate Zones of World Cities';
  select City, Country, Latitude,
         case
           when Latitude gt 67 then 'North Frigid'
           when 67 ge Latitude ge 23 then 'North Temperate'
           when 23 gt Latitude gt -23 then 'Torrid'
           when -23 ge Latitude ge -67 then 'South Temperate'
           else 'South Frigid'
         end as ClimateZone
  from sql.worldcitycoords
  order by City;
```

**Output 2.12** Using a Simple CASE Expression

Climate Zones of World Cities			
City	Country	Latitude	ClimateZone
Abadan	Iran	30	North Temperate
Acapulco	Mexico	17	Torrid
Accra	Ghana	5	Torrid
Adana	Turkey	37	North Temperate
Addis Ababa	Ethiopia	9	Torrid
Adelaide	Australia	-35	South Temperate
Aden	Yemen	13	Torrid
Ahmenabad	India	22	Torrid
Algiers	Algeria	37	North Temperate
Alice Springs	Australia	-24	South Temperate
Amman	Jordan	32	North Temperate
Amsterdam	Netherlands	52	North Temperate

**Using the CASE-OPERAND Form**

You can also construct a CASE expression by using the CASE-OPERAND form, as in the following example. This example selects states and assigns them to a region based on the value of the Continent column:

```
proc sql outobs=12;
  title 'Assigning Regions to Continents';
  select Name, Continent,
         case Continent
           when 'North America' then 'Continental U.S.'
           when 'Oceania' then 'Pacific Islands'
           else 'None'
         end as Region
  from sql.unitedstates;
```

*Note:* When you use the CASE-OPERAND form of the CASE expression, the conditions must all be equality tests; that is, they cannot use comparison operators or other types of operators, as are used in “Using a Simple CASE Expression” on page 22.  $\Delta$

**Output 2.13** Using a CASE Expression in the CASE-OPERAND Form

Assigning Regions to Continents		
Name	Continent	Region
Alabama	North America	Continental U.S.
Alaska	North America	Continental U.S.
Arizona	North America	Continental U.S.
Arkansas	North America	Continental U.S.
California	North America	Continental U.S.
Colorado	North America	Continental U.S.
Connecticut	North America	Continental U.S.
Delaware	North America	Continental U.S.
District of Columbia	North America	Continental U.S.
Florida	North America	Continental U.S.
Georgia	North America	Continental U.S.
Hawaii	Oceania	Pacific Islands

---

## Replacing Missing Values

The COALESCE function enables you to replace missing values in a column with a new value that you specify. For every row that the query processes, the COALESCE function checks each of its arguments until it finds a nonmissing value, then returns that value. If all of the arguments are missing values, then the COALESCE function returns a missing value. For example, the following query replaces missing values in the LowPoint column in the SQL.CONTINENTS table with the words **Not Available**:

```
proc sql;
  title 'Continental Low Points';
  select Name, coalesce(LowPoint, 'Not Available') as LowPoint
  from sql.continents;
```

**Output 2.14** Using the COALESCE Function to Replace Missing Values

Continental Low Points	
Name	LowPoint
Africa	Lake Assal
Antarctica	Not Available
Asia	Dead Sea
Australia	Lake Eyre
Central America and Caribbean	Not Available
Europe	Caspian Sea
North America	Death Valley
Oceania	Not Available
South America	Valdes Peninsula

The following CASE expression shows another way to perform the same replacement of missing values; however, the COALESCE function requires fewer lines of code to obtain the same results:

```
proc sql;
  title 'Continental Low Points';
  select Name, case
    when LowPoint is missing then 'Not Available'
    else Lowpoint
  end as LowPoint
  from sql.continents;
```

---

## Specifying Column Attributes

You can specify the following column attributes, which determine how SAS data is displayed:

- FORMAT=
- INFORMAT=
- LABEL=
- LENGTH=

If you do not specify these attributes, then PROC SQL uses attributes that are already saved in the table or, if no attributes are saved, then it uses the default attributes.

The following example assigns a label of **State** to the Name column and a format of **COMMA10.** to the Area column:

```
proc sql outobs=12;
  title 'Areas of U.S. States in Square Miles';
  select Name label='State', Area format=comma10.
  from sql.unitedstates;
```

*Note:* Using the **LABEL=** keyword is optional. For example, the following two select clauses are the same:

```
select Name label='State', Area format=comma10.
```

```
select Name 'State', Area format=comma10.
```

△

**Output 2.15** Specifying Column Attributes

Areas of U.S. States in Square Miles	
State	Area
Alabama	52,423
Alaska	656,400
Arizona	114,000
Arkansas	53,200
California	163,700
Colorado	104,100
Connecticut	5,500
Delaware	2,500
District of Columbia	100
Florida	65,800
Georgia	59,400
Hawaii	10,900

---

## Sorting Data

You can sort query results with an **ORDER BY** clause by specifying any of the columns in the table, including columns that are not selected or columns that are calculated.

Unless an **ORDER BY** clause is included in the **SELECT** statement, then a particular order to the output rows, such as the order in which the rows are encountered in the queried table, cannot be guaranteed, even if an index is present. Without an **ORDER BY** clause, the order of the output rows is determined by the internal processing of **PROC SQL**, the default collating sequence of **SAS**, and your operating environment. Therefore, if you want your result table to appear in a particular order, then use the **ORDER BY** clause.

For more information and examples see the **ORDER BY** clause in *Base SAS Procedures Guide*.

---

## Sorting by Column

The following example selects countries and their populations from the SQL.COUNTRIES table and orders the results by population:

```
proc sql outobs=12;
  title 'Country Populations';
  select Name, Population format=comma10.
  from sql.countries
  order by Population;
```

*Note:* When you use an ORDER BY clause, you change the order of the output but not the order of the rows that are stored in the table.  $\Delta$

*Note:* The PROC SQL default sort order is ascending.  $\Delta$

**Output 2.16**    Sorting by Column

Country Populations	
Name	Population
Vatican City	1,010
Tuvalu	10,099
Nauru	10,099
Turks and Caicos Islands	12,119
Leeward Islands	12,119
Cayman Islands	23,228
San Marino	24,238
Liechtenstein	30,297
Gibraltar	30,297
Monaco	31,307
Saint Kitts and Nevis	41,406
Marshall Islands	54,535

---

## Sorting by Multiple Columns

You can sort by more than one column by specifying the column names, separated by commas, in the ORDER BY clause. The following example sorts the SQL.COUNTRIES table by two columns, Continent and Name:

```
proc sql outobs=12;
  title 'Countries, Sorted by Continent and Name';
  select Name, Continent
  from sql.countries
  order by Continent, Name;
```

**Output 2.17** Sorting by Multiple Columns

Countries, Sorted by Continent and Name	
Name	Continent
-----	
Bermuda	
Iceland	
Kalaallit Nunaat	
Algeria	Africa
Angola	Africa
Benin	Africa
Botswana	Africa
Burkina Faso	Africa
Burundi	Africa
Cameroon	Africa
Cape Verde	Africa
Central African Republic	Africa

*Note:* The results list countries without continents first because PROC SQL sorts missing values first in an ascending sort.  $\Delta$

---

## Specifying a Sort Order

To order the results, specify ASC for ascending or DESC for descending. You can specify a sort order for each column in the ORDER BY clause.

When you specify multiple columns in the ORDER BY clause, the first column determines the primary row order of the results. Subsequent columns determine the order of rows that have the same value for the primary sort. The following example sorts the SQL.FEATURES table by feature type and name:

```
proc sql outobs=12;
  title 'World Topographical Features';
  select Name, Type
  from sql.features
  order by Type desc, Name;
```

*Note:* The ASC keyword is optional because the PROC SQL default sort order is ascending.  $\Delta$

**Output 2.18**    Specifying a Sort Order

World Topographical Features	
Name	Type
-----	
Angel Falls	Waterfall
Niagara Falls	Waterfall
Tugela Falls	Waterfall
Yosemite	Waterfall
Andaman	Sea
Baltic	Sea
Bering	Sea
Black	Sea
Caribbean	Sea
Gulf of Mexico	Sea
Hudson Bay	Sea
Mediterranean	Sea

**Sorting by Calculated Column**

You can sort by a calculated column by specifying its alias in the ORDER BY clause. The following example calculates population densities and then performs a sort on the calculated Density column:

```
proc sql outobs=12;
  title 'World Population Densities per Square Mile';
  select Name, Population format=comma12., Area format=comma8.,
         Population/Area as Density format=comma10.
  from sql.countries
  order by Density desc;
```

**Output 2.19**    Sorting by Calculated Column

World Population Densities per Square Mile			
Name	Population	Area	Density
-----			
Hong Kong	5,857,414	400	14,644
Singapore	2,887,301	200	14,437
Luxembourg	405,980	100	4,060
Malta	370,633	100	3,706
Maldives	254,495	100	2,545
Bangladesh	126,387,850	57,300	2,206
Bahrain	591,800	300	1,973
Taiwan	21,509,839	14,000	1,536
Channel Islands	146,436	100	1,464
Barbados	258,534	200	1,293
Korea, South	45,529,277	38,300	1,189
Mauritius	1,128,057	1,000	1,128



## Sorting by Column Position

You can sort by any column within the SELECT clause by specifying its numerical position. By specifying a position instead of a name, you can sort by a calculated column that has no alias. The following example does not assign an alias to the calculated density column. Instead, the column position of 4 in the ORDER BY clause refers to the position of the calculated column in the SELECT clause:

```
proc sql outobs=12;
  title 'World Population Densities per Square Mile';
  select Name, Population format=comma12., Area format=comma8.,
         Population/Area format=comma10. label='Density'
  from sql.countries
  order by 4 desc;
```

*Note:* PROC SQL uses a label, if one has been assigned, as a heading for a column that does not have an alias. △

### Output 2.20 Sorting by Column Position

World Population Densities per Square Mile			
Name	Population	Area	Density
Hong Kong	5,857,414	400	14,644
Singapore	2,887,301	200	14,437
Luxembourg	405,980	100	4,060
Malta	370,633	100	3,706
Maldives	254,495	100	2,545
Bangladesh	126,387,850	57,300	2,206
Bahrain	591,800	300	1,973
Taiwan	21,509,839	14,000	1,536
Channel Islands	146,436	100	1,464
Barbados	258,534	200	1,293
Korea, South	45,529,277	38,300	1,189
Mauritius	1,128,057	1,000	1,128

## Sorting by Columns That Are Not Selected

You can sort query results by columns that are not included in the query. For example, the following query returns all the rows in the SQL.COUNTRIES table and sorts them by population, even though the Population column is not included in the query:

```
proc sql outobs=12;
  title 'Countries, Sorted by Population';
  select Name, Continent
  from sql.countries
  order by Population;
```

**Output 2.21** Sorting by Columns That are not Selected

Countries, Sorted by Population	
Name	Continent
Vatican City	Europe
Tuvalu	Oceania
Nauru	Oceania
Turks and Caicos Islands	Central America and Caribbean
Leeward Islands	Central America and Caribbean
Cayman Islands	Central America and Caribbean
San Marino	Europe
Liechtenstein	Europe
Gibraltar	Europe
Monaco	Europe
Saint Kitts and Nevis	Central America and Caribbean
Marshall Islands	Oceania

---

## Specifying a Different Sorting Sequence

`SORTSEQ=` is a PROC SQL statement option that specifies the sorting sequence for PROC SQL to use when a query contains an `ORDER BY` clause. Use this option only if you want to use a sorting sequence other than your operating environment's default sorting sequence. Possible values include ASCII, EBCDIC, and some languages other than English. For example, in an operating environment that supports the EBCDIC sorting sequence, you could use the following option in the PROC SQL statement to set the sorting sequence to EBCDIC:

```
proc sql sortseq=ebcdic;
```

*Note:* `SORTSEQ=` affects only the `ORDER BY` clause. It does not override your operating environment's default comparison operations for the `WHERE` clause.  $\Delta$

*Operating Environment Information:* See the SAS documentation for your operating environment for more information about the default and other sorting sequences for your operating environment.  $\Delta$

---

## Sorting Columns That Contain Missing Values

PROC SQL sorts nulls, or missing values, before character or numeric data; therefore, when you specify ascending order, missing values appear first in the query results.

The following example sorts the rows in the `CONTINENTS` table by the `LowPoint` column:

```
proc sql;
  title 'Continents, Sorted by Low Point';
  select Name, LowPoint
  from sql.continents
  order by LowPoint;
```

Because three continents have a missing value in the `LowPoint` column, those continents appear first in the output. Note that because the query does not specify a secondary sort, rows that have the same value in the `LowPoint` column, such as the first three rows of output, are not displayed in any particular order. In general, if you

do not explicitly specify a sort order, then PROC SQL output is not guaranteed to be in any particular order.

**Output 2.22** Sorting Columns That Contain Missing Values

Continents, Sorted by Low Point	
Name	LowPoint
Central America and Caribbean	
Antarctica	
Oceania	
Europe	Caspian Sea
Asia	Dead Sea
North America	Death Valley
Africa	Lake Assal
Australia	Lake Eyre
South America	Valdes Peninsula

---

## Retrieving Rows That Satisfy a Condition

The WHERE clause enables you to retrieve only rows from a table that satisfy a condition. WHERE clauses can contain any of the columns in a table, including columns that are not selected.

---

### Using a Simple WHERE Clause

The following example uses a WHERE clause to find all countries that are in the continent of Europe and their populations:

```
proc sql outobs=12;
  title 'Countries in Europe';
  select Name, Population format=comma10.
  from sql.countries
  where Continent = 'Europe';
```

**Output 2.23** Using a Simple WHERE Clause

Countries in Europe	
Name	Population
Albania	3,407,400
Andorra	64,634
Austria	8,033,746
Belarus	10,508,000
Belgium	10,162,614
Bosnia and Herzegovina	4,697,040
Bulgaria	8,887,111
Channel Islands	146,436
Croatia	4,744,505
Czech Republic	10,511,029
Denmark	5,239,356
England	49,293,170

---

## Retrieving Rows Based on a Comparison

You can use comparison operators in a WHERE clause to select different subsets of data. The following table lists the comparison operators that you can use:

**Table 2.2** Comparison Operators

Symbol	Mnemonic Equivalent	Definition	Example
=	EQ	equal to	<b>where Name = 'Asia';</b>
^= or ~= or != or <>	NE	not equal to	<b>where Name ne 'Africa';</b>
>	GT	greater than	<b>where Area &gt; 10000;</b>
<	LT	less than	<b>where Depth &lt; 5000;</b>
>=	GE	greater than or equal to	<b>where Statehood &gt;= '01jan1860'd;</b>
<=	LE	less than or equal to	<b>where Population &lt;= 5000000;</b>

The following example subsets the SQL.UNITEDSTATES table by including only states with populations greater than 5,000,000 people:

```
proc sql;
  title 'States with Populations over 5,000,000';
  select Name, Population format=comma10.
    from sql.unitedstates
   where Population gt 5000000
   order by Population desc;
```

**Output 2.24** Retrieving Rows Based on a Comparison

States with Populations over 5,000,000	
Name	Population
California	31,518,948
New York	18,377,334
Texas	18,209,994
Florida	13,814,408
Pennsylvania	12,167,566
Illinois	11,813,091
Ohio	11,200,790
Michigan	9,571,318
New Jersey	7,957,196
North Carolina	7,013,950
Georgia	6,985,572
Virginia	6,554,851
Massachusetts	6,071,816
Indiana	5,769,553
Washington	5,307,322
Missouri	5,285,610
Tennessee	5,149,273
Wisconsin	5,087,770
Maryland	5,014,048

**Retrieving Rows That Satisfy Multiple Conditions**

You can use logical, or Boolean, operators to construct a WHERE clause that contains two or more expressions. The following table lists the logical operators that you can use:

**Table 2.3** Logical (Boolean) Operators

Symbol	Mnemonic Equivalent	Definition	Example
&	AND	specifies that both the previous and following conditions must be true	<b>Continent = 'Asia' and Population &gt; 5000000</b>
! or   or	OR	specifies that either the previous or the following condition must be true	<b>Population &lt; 1000000 or Population &gt; 5000000</b>
^ or ~ or -	NOT	specifies that the following condition must be false	<b>Continent not 'Africa'</b>

The following example uses two expressions to include only countries that are in Africa and that have a population greater than 20,000,000 people:

```
proc sql;
  title 'Countries in Africa with Populations over 20,000,000';
  select Name, Population format=comma10.
    from sql.countries
   where Continent = 'Africa' and Population gt 20000000
   order by Population desc;
```

**Output 2.25** Retrieving Rows That Satisfy Multiple Conditions

Countries in Africa with Populations over 20,000,000	
Name	Population
Nigeria	99,062,003
Egypt	59,912,259
Ethiopia	59,291,170
South Africa	44,365,873
Congo, Democratic Republic of	43,106,529
Sudan	29,711,229
Morocco	28,841,705
Kenya	28,520,558
Tanzania	28,263,033
Algeria	28,171,132
Uganda	20,055,584

*Note:* You can use parentheses to improve the readability of WHERE clauses that contain multiple, or compound, expressions, such as the following:

```
where (Continent = 'Africa' and Population gt 2000000) or
      (Continent = 'Asia' and Population gt 1000000)
```

$\Delta$

---

## Using Other Conditional Operators

You can use many different conditional operators in a WHERE clause. The following table lists other operators that you can use:

**Table 2.4** Conditional Operators

Operator	Definition	Example
ANY	specifies that at least one of a set of values obtained from a subquery must satisfy a given condition	<b>where Population &gt; any (select Population from sql.countries)</b>
ALL	specifies that all of the values obtained from a subquery must satisfy a given condition	<b>where Population &gt; all (select Population from sql.countries)</b>
BETWEEN-AND	tests for values within an inclusive range	<b>where Population between 1000000 and 5000000</b>
CONTAINS	tests for values that contain a specified string	<b>where Continent contains 'America';</b>
EXISTS	tests for the existence of a set of values obtained from a subquery	<b>where exists (select * from sql.oilprod);</b>
IN	tests for values that match one of a list of values	<b>where Name in ('Africa', 'Asia');</b>
IS NULL or IS MISSING	tests for missing values	<b>where Population is missing;</b>

Operator	Definition	Example
LIKE	tests for values that match a specified pattern <sup>1</sup>	<b>where Continent like 'A%';</b>
=*	tests for values that sound like a specified value	<b>where Name =* 'Tiland';</b>

1 You can use a percent symbol (%) to match any number of characters. You can use an underscore (\_) to match one arbitrary character.

*Note:* All of these operators can be prefixed with the NOT operator to form a negative condition. △

## Using the IN Operator

The IN operator enables you to include values within a list that you supply. The following example uses the IN operator to include only the mountains and waterfalls in the SQL.FEATURES table:

```
proc sql outobs=12;
  title 'World Mountains and Waterfalls';
  select Name, Type, Height format=comma10.
  from sql.features
  where Type in ('Mountain', 'Waterfall')
  order by Height;
```

**Output 2.26** Using the IN Operator

World Mountains and Waterfalls		
Name	Type	Height
Niagara Falls	Waterfall	193
Yosemite	Waterfall	2,425
Tugela Falls	Waterfall	3,110
Angel Falls	Waterfall	3,212
Kosciusko	Mountain	7,310
Pico Duarte	Mountain	10,417
Cook	Mountain	12,349
Matterhorn	Mountain	14,690
Wilhelm	Mountain	14,793
Mont Blanc	Mountain	15,771
Ararat	Mountain	16,804
Vinson Massif	Mountain	16,864

## Using the IS MISSING Operator

The IS MISSING operator enables you to identify rows that contain columns with missing values. The following example selects countries that are not located on a continent; that is, these countries have a missing value in the Continent column:

```
proc sql;
  title 'Countries with Missing Continents';
  select Name, Continent
    from sql.countries
   where Continent is missing;
```

*Note:* The IS NULL operator is the same as, and interchangeable with, the IS MISSING operator.  $\Delta$

### Output 2.27 Using the IS MISSING Operator

Countries with Missing Continents	
Name	Continent
Bermuda	
Iceland	
Kalaallit Nunaat	

## Using the BETWEEN-AND Operators

To select rows based on a range of values, you can use the BETWEEN-AND operators. This example selects countries that have latitudes within five degrees of the Equator:

```
proc sql outobs=12;
  title 'Equatorial Cities of the World';
  select City, Country, Latitude
    from sql.worldcitycoords
   where Latitude between -5 and 5;
```

*Note:* In the tables used in these examples, latitude values that are south of the Equator are negative. Longitude values that are west of the Prime Meridian are also negative.  $\Delta$

*Note:* Because the BETWEEN-AND operators are inclusive, the values that you specify in the BETWEEN-AND expression are included in the results.  $\Delta$



**Output 2.28** Using the BETWEEN-AND Operators

Equatorial Cities of the World		
City	Country	Latitude
Belem	Brazil	-1
Fortaleza	Brazil	-4
Bogota	Colombia	4
Cali	Colombia	3
Brazzaville	Congo	-4
Quito	Ecuador	0
Cayenne	French Guiana	5
Accra	Ghana	5
Medan	Indonesia	3
Palembang	Indonesia	-3
Nairobi	Kenya	-1
Kuala Lumpur	Malaysia	4

**Using the LIKE Operator**

The LIKE operator enables you to select rows based on pattern matching. For example, the following query returns all countries in the SQL.COUNTRIES table that begin with the letter *Z* and are any number of characters long, or end with the letter *a* and are five characters long:

```
proc sql;
  title1 'Country Names that Begin with the Letter "Z"';
  title2 'or Are 5 Characters Long and End with the Letter "a"';
  select Name
    from sql.countries
   where Name like 'Z%' or Name like '____a';
```

**Output 2.29** Using the LIKE Operator

Country Names that Begin with the Letter "Z" or Are 5 Characters Long and End with the Letter "a"	
Name	
China	
Ghana	
India	
Kenya	
Libya	
Malta	
Syria	
Tonga	
Zambia	
Zimbabwe	

The percent sign (%) and underscore (\_) are wildcard characters. For more information about pattern matching with the LIKE comparison operator, see the “SQL Procedure” chapter in the *Base SAS Procedures Guide*.

## Using Truncated String Comparison Operators

Truncated string comparison operators are used to compare two strings. They differ from conventional comparison operators in that, before executing the comparison, PROC SQL truncates the longer string to be the same length as the shorter string. The truncation is performed internally; neither operand is permanently changed. The following table lists the truncated comparison operators:

**Table 2.5** Truncated String Comparison Operators

Symbol	Definition	Example
EQT	equal to truncated strings	<b>where Name eqt 'Aust';</b>
GTT	greater than truncated strings	<b>where Name gtt 'Bah';</b>
LTT	less than truncated strings	<b>where Name ltt 'An';</b>
GET	greater than or equal to truncated strings	<b>where Country get 'United A';</b>
LET	less than or equal to truncated strings	<b>where Lastname let 'Smith';</b>
NET	not equal to truncated strings	<b>where Style net 'TWO';</b>

The following example returns a list of U.S. states that have 'New ' at the beginning of their names:

```
proc sql;
  title "New" U.S. States';
  select Name
    from sql.unitedstates
   where Name eqt 'New ';
```

**Output 2.30** Using a Truncated String Comparison Operator

"New" U.S. States	
Name	
	-----
New Hampshire	
New Jersey	
New Mexico	
New York	

## Using a WHERE Clause with Missing Values

If a column that you specify in a WHERE clause contains missing values, then a query might provide unexpected results. For example, the following query returns all features from the SQL.FEATURES table that have a depth of less than 500 feet:

```
/* incorrect output */

proc sql outobs=12;
  title 'World Features with a Depth of Less than 500 Feet';
```

```

select Name, Depth
  from sql.features
 where Depth < 500
 order by Depth;

```

**Output 2.31** Using a WHERE Clause with Missing Values (Incorrect Output)

World Features with a Depth of Less than 500 Feet	
Name	Depth
Kalahari	.
Nile	.
Citlaltepec	.
Lena	.
Mont Blanc	.
Borneo	.
Rub al Khali	.
Amur	.
Yosemite	.
Cook	.
Mackenzie-Peace	.
Mekong	.

However, because PROC SQL treats missing values as smaller than nonmissing values, features that have no depth listed are also included in the results. To avoid this problem, you could adjust the WHERE expression to check for missing values and exclude them from the query results, as follows:

```

/* corrected output */

proc sql outobs=12;
  title 'World Features with a Depth of Less than 500 Feet';
  select Name, Depth
    from sql.features
   where Depth < 500 and Depth is not missing
  order by Depth;

```

**Output 2.32** Using a WHERE Clause with Missing Values (Corrected Output)

World Features with a Depth of Less than 500 Feet	
Name	Depth
Baltic	180
Aral Sea	222
Victoria	264
Hudson Bay	305
North	308

## Summarizing Data

You can use an *aggregate function* (or summary function) to produce a statistical summary of data in a table. The aggregate function instructs PROC SQL in how to combine data in one or more columns. If you specify one column as the argument to an aggregate function, then the values in that column are calculated. If you specify multiple arguments, then the arguments or columns that are listed are calculated.

*Note:* When more than one argument is used within an SQL aggregate function, the function is no longer considered to be an SQL aggregate or summary function. If there is a like-named Base SAS function, then PROC SQL executes the Base SAS function and the results that are returned are based on the values for the current row. If no like-named Base SAS function exists, then an error will occur. For example, if you use multiple arguments for the AVG function, an error will occur because there is no AVG function for Base SAS.  $\triangle$

When you use an aggregate function, PROC SQL applies the function to the entire table, unless you use a GROUP BY clause. You can use aggregate functions in the SELECT or HAVING clauses.

*Note:* See “Grouping Data” on page 47 for information about producing summaries of individual groups of data within a table.  $\triangle$

---

## Using Aggregate Functions

The following table lists the aggregate functions that you can use:

**Table 2.6** Aggregate Functions

Function	Definition
AVG, MEAN	mean or average of values
COUNT, FREQ, N	number of nonmissing values
CSS	corrected sum of squares
CV	coefficient of variation (percent)
MAX	largest value
MIN	smallest value
NMISS	number of missing values
PRT	probability of a greater absolute value of Student's $t$
RANGE	range of values
STD	standard deviation
STDERR	standard error of the mean
SUM	sum of values
SUMWGT	sum of the WEIGHT variable values <sup>1</sup>
T	Student's $t$ value for testing the hypothesis that the population mean is zero

Function	Definition
USS	uncorrected sum of squares
VAR	variance

1 In the SQL procedure, each row has a weight of 1.

*Note:* You can use most other SAS functions in PROC SQL, but they are not treated as aggregate functions.  $\Delta$

## Summarizing Data with a WHERE Clause

You can use aggregate, or summary functions, by using a WHERE clause. For a complete list of the aggregate functions that you can use, see Table 2.6 on page 40.

### Using the MEAN Function with a WHERE Clause

This example uses the MEAN function to find the annual mean temperature for each country in the SQL.WORLDTEMPS table. The WHERE clause returns countries with a mean temperature that is greater than 75 degrees.

```
proc sql outobs=12;
  title 'Mean Temperatures for World Cities';
  select City, Country, mean(AvgHigh, AvgLow)
     as MeanTemp
  from sql.worldtemps
  where calculated MeanTemp gt 75
  order by MeanTemp desc;
```

*Note:* You must use the CALCULATED keyword to reference the calculated column.  $\Delta$

#### Output 2.33 Using the MEAN Function with a WHERE Clause

Mean Temperatures for World Cities		
City	Country	MeanTemp
Lagos	Nigeria	82.5
Manila	Philippines	82
Bangkok	Thailand	82
Singapore	Singapore	81
Bombay	India	79
Kingston	Jamaica	78
San Juan	Puerto Rico	78
Calcutta	India	76.5
Havana	Cuba	76.5
Nassau	Bahamas	76.5

---

## Displaying Sums

The following example uses the SUM function to return the total oil reserves for all countries in the SQL.OILRSRVS table:

```
proc sql;
  title 'World Oil Reserves';
  select sum(Barrels) format=comma18. as TotalBarrels
  from sql.oilrsrvs;
```

*Note:* The SUM function produces a single row of output for the requested sum because no nonaggregate value appears in the SELECT clause.  $\triangle$

### Output 2.34 Displaying Sums

World Oil Reserves
TotalBarrels
-----
878,300,000,000

---

## Combining Data from Multiple Rows into a Single Row

In the previous example, PROC SQL combined information from multiple rows of data into a single row of output. Specifically, the world oil reserves for each country were combined to form a total for all countries. Combining, or rolling up, of rows occurs when

- the SELECT clause contains only columns that are specified within an aggregate function
- the WHERE clause, if there is one, contains only columns that are specified in the SELECT clause.

---

## Remerging Summary Statistics

The following example uses the MAX function to find the largest population in the SQL.COUNTRIES table and displays it in a column called MaxPopulation. Aggregate functions, such as the MAX function, can cause the same calculation to repeat for every row. This occurs whenever PROC SQL *remerges* data. Remerging occurs whenever any of the following conditions exist

- The SELECT clause references a column that contains an aggregate function that is not listed in a GROUP BY clause.
- The SELECT clause references a column that contains an aggregate function and other column or columns that are not listed in the GROUP BY clause.
- One or more columns or column expressions that are listed in a HAVING clause are not included in a subquery or a GROUP BY clause.

In this example, PROC SQL writes the population of China, which is the largest population in the table:

```
proc sql outobs=12;
  title 'Largest Country Populations';
  select Name, Population format=comma20.,
         max(Population) as MaxPopulation format=comma20.
  from sql.countries
  order by Population desc;
```

**Output 2.35** Using Aggregate Functions

Largest Country Populations		
Name	Population	MaxPopulation
China	1,202,215,077	1,202,215,077
India	929,009,120	1,202,215,077
United States	263,294,808	1,202,215,077
Indonesia	202,393,859	1,202,215,077
Brazil	160,310,357	1,202,215,077
Russia	151,089,979	1,202,215,077
Bangladesh	126,387,850	1,202,215,077
Japan	126,345,434	1,202,215,077
Pakistan	123,062,252	1,202,215,077
Nigeria	99,062,003	1,202,215,077
Mexico	93,114,708	1,202,215,077
Germany	81,890,690	1,202,215,077

In some cases, you might need to use an aggregate function so that you can use its results in another calculation. To do this, you need only to construct one query for PROC SQL to automatically perform both calculations. This type of operation also causes PROC SQL to remerge the data.

For example, if you want to find the percentage of the total world population that resides in each country, then you construct a single query that

- obtains the total world population by using the SUM function
- divides each country's population by the total world population.

PROC SQL runs an internal query to find the sum and then runs another internal query to divide each country's population by the sum.

```
proc sql outobs=12;
  title 'Percentage of World Population in Countries';
  select Name, Population format=comma14.,
         (Population / sum(Population) * 100) as Percentage
         format=comma8.2
  from sql.countries
  order by Percentage desc;
```

*Note:* When a query remerges data, PROC SQL displays a note in the log to indicate that data remerging has occurred.  $\Delta$

**Output 2.36** Remerging Summary Statistics

Percentage of World Population in Countries		
Name	Population	Percentage
China	1,202,215,077	20.88
India	929,009,120	16.13
United States	263,294,808	4.57
Indonesia	202,393,859	3.52
Brazil	160,310,357	2.78
Russia	151,089,979	2.62
Bangladesh	126,387,850	2.20
Japan	126,345,434	2.19
Pakistan	123,062,252	2.14
Nigeria	99,062,003	1.72
Mexico	93,114,708	1.62
Germany	81,890,690	1.42

## Using Aggregate Functions with Unique Values

You can use `DISTINCT` with an aggregate function to cause the function to use only unique values from a column.

### Counting Unique Values

The following query returns the number of distinct, nonmissing continents in the `SQL.COUNTRIES` table:

```
proc sql;
  title 'Number of Continents in the COUNTRIES Table';
  select count(distinct Continent) as Count
  from sql.countries;
```

**Output 2.37** Using `DISTINCT` with the `COUNT` Function

Number of Continents in the COUNTRIES Table	
Count	
8	

*Note:* You cannot use `select count(distinct *)` to count distinct rows in a table. This code generates an error because PROC SQL does not know which duplicate column values to eliminate.  $\Delta$



## Counting Nonmissing Values

Compare the previous example with the following query, which does not use the `DISTINCT` keyword. This query counts every nonmissing occurrence of a continent in the `SQL.COUNTRIES` table, including duplicate values:

```
proc sql;
  title 'Countries for Which a Continent is Listed';
  select count(Continent) as Count
  from sql.countries;
```

**Output 2.38** Effect of Not Using `DISTINCT` with the `COUNT` Function

Countries for Which a Continent is Listed	
	Count
	-----
	206

## Counting All Rows

In the previous two examples, countries that have a missing value in the `Continent` column are ignored by the `COUNT` function. To obtain a count of all rows in the table, including countries that are not on a continent, you can use the following code in the `SELECT` clause:

```
proc sql;
  title 'Number of Countries in the SQL.COUNTRIES Table';
  select count(*) as Number
  from sql.countries;
```

**Output 2.39** Using the `COUNT` Function to Count All Rows in a Table

Number of Countries in the SQL.COUNTRIES Table	
	Number
	-----
	209

---

## Summarizing Data with Missing Values

When you use an aggregate function with data that contains missing values, the results might not provide the information that you expect because many aggregate functions ignore missing values.

## Finding Errors Caused by Missing Values

The AVG function returns the average of only the nonmissing values. The following query calculates the average length of three features in the SQL.FEATURES table: Angel Falls and the Amazon and Nile rivers:

```
/* incorrect output */

proc sql;
  title 'Average Length of Angel Falls, Amazon and Nile Rivers';
  select Name, Length, avg(Length) as AvgLength
     from sql.features
     where Name in ('Angel Falls', 'Amazon', 'Nile');
```

**Output 2.40** Finding Errors Caused by Missing Values (Incorrect Output)

Average Length of Angel Falls, Amazon and Nile Rivers			
Name	Length	AvgLength	
Amazon	4000	4072.5	
Angel Falls	.	4072.5	
Nile	4145	4072.5	

Because no length is stored for Angel Falls, the average includes only the Amazon and Nile rivers. The average is therefore incorrect.

Compare the result from the previous example with the following query, which includes a CASE expression to handle missing values:

```
/* corrected output */

proc sql;
  title 'Average Length of Angel Falls, Amazon and Nile Rivers';
  select Name, Length, case
     when Length is missing then 0
     else Length
     end as NewLength,
     avg(calculated NewLength) as AvgLength
     from sql.features
     where Name in ('Angel Falls', 'Amazon', 'Nile');
```

**Output 2.41** Finding Errors Caused by Missing Values (Corrected Output)

Average Length of Angel Falls, Amazon and Nile Rivers			
Name	Length	NewLength	AvgLength
Amazon	4000	4000	2715
Angel Falls	.	0	2715
Nile	4145	4145	2715

## Grouping Data

The GROUP BY clause groups data by a specified column or columns. When you use a GROUP BY clause, you also use an aggregate function in the SELECT clause or in a HAVING clause to instruct PROC SQL in how to summarize the data for each group. PROC SQL calculates the aggregate function separately for each group.

### Grouping by One Column

The following example sums the populations of all countries to find the total population of each continent:

```
proc sql;
  title 'Total Populations of World Continents';
  select Continent, sum(Population) format=comma14. as TotalPopulation
  from sql.countries
  where Continent is not missing
  group by Continent;
```

*Note:* Countries for which a continent is not listed are excluded by the WHERE clause.  $\Delta$

**Output 2.42** Grouping by One Column

Total Populations of World Continents	
Continent	Total Population
Africa	710,529,592
Asia	3,381,858,879
Australia	18,255,944
Central America and Caribbean	66,815,930
Europe	872,192,202
North America	384,801,818
Oceania	5,342,368
South America	317,568,801

### Grouping without Summarizing

When you use a GROUP BY clause without an aggregate function, PROC SQL treats the GROUP BY clause as if it were an ORDER BY clause and displays a message in the log that informs you that this has happened. The following example attempts to group high and low temperature information for each city in the SQL.WORLDTEMPS table

by country:

```
proc sql outobs=12;
  title 'High and Low Temperatures';
  select City, Country, AvgHigh, AvgLow
  from sql.worldtemps
  group by Country;
```

The output and log show that PROC SQL transforms the GROUP BY clause into an ORDER BY clause.

**Output 2.43** Grouping without Aggregate Functions

High and Low Temperatures			
City	Country	AvgHigh	AvgLow
Algiers	Algeria	90	45
Buenos Aires	Argentina	87	48
Sydney	Australia	79	44
Vienna	Austria	76	28
Nassau	Bahamas	88	65
Hamilton	Bermuda	85	59
Sao Paulo	Brazil	81	53
Rio de Janeiro	Brazil	85	64
Quebec	Canada	76	5
Montreal	Canada	77	8
Toronto	Canada	80	17
Beijing	China	86	17

**Output 2.44** Grouping without Aggregate Functions (Partial Log)

```
WARNING: A GROUP BY clause has been transformed into an ORDER BY clause because
neither the SELECT clause nor the optional HAVING clause of the
associated table-expression referenced a summary function.
```

## Grouping by Multiple Columns

To group by multiple columns, separate the column names with commas within the GROUP BY clause. You can use aggregate functions with any of the columns that you select. The following example groups by both Location and Type, producing total square miles for the deserts and lakes in each location in the SQL.FEATURES table:

```
proc sql;
  title 'Total Square Miles of Deserts and Lakes';
  select Location, Type, sum(Area) as TotalArea format=comma16.
  from sql.features
  where type in ('Desert', 'Lake')
  group by Location, Type;
```

**Output 2.45** Grouping by Multiple Columns

Total Square Miles of Deserts and Lakes		
Location	Type	TotalArea
Africa	Desert	3,725,000
Africa	Lake	50,958
Asia	Lake	25,300
Australia	Desert	300,000
Canada	Lake	12,275
China	Desert	500,000
Europe - Asia	Lake	143,550
North America	Desert	140,000
North America	Lake	77,200
Russia	Lake	11,780
Saudi Arabia	Desert	250,000

## Grouping and Sorting Data

You can order grouped results with an `ORDER BY` clause. The following example takes the previous example and adds an `ORDER BY` clause to change the order of the `Location` column from ascending order to descending order:

```
proc sql;
  title 'Total Square Miles of Deserts and Lakes';
  select Location, Type, sum(Area) as TotalArea format=comma16.
  from sql.features
  where type in ('Desert', 'Lake')
  group by Location, Type
  order by Location desc;
```

**Output 2.46** Grouping with an `ORDER BY` Clause

Total Square Miles of Deserts and Lakes		
Location	Type	TotalArea
Saudi Arabia	Desert	250,000
Russia	Lake	11,780
North America	Lake	77,200
North America	Desert	140,000
Europe - Asia	Lake	143,550
China	Desert	500,000
Canada	Lake	12,275
Australia	Desert	300,000
Asia	Lake	25,300
Africa	Desert	3,725,000
Africa	Lake	50,958

## Grouping with Missing Values

When a column contains missing values, PROC SQL treats the missing values as a single group. This can sometimes provide unexpected results.

### Finding Grouping Errors Caused by Missing Values

In this example, because the SQL.COUNTRIES table contains some missing values in the Continent column, the missing values combine to form a single group that has the total area of the countries that have a missing value in the Continent column:

```
/* incorrect output */

proc sql outobs=12;
  title 'Areas of World Continents';
  select Name format=$25.,
         Continent,
         sum(Area) format=comma12. as TotalArea
  from sql.countries
  group by Continent
  order by Continent, Name;
```

The output is incorrect because Bermuda, Iceland, and Kalaallit Nunaat are not actually part of the same continent; however, PROC SQL treats them that way because they all have a missing character value in the Continent column.

**Output 2.47** Finding Grouping Errors Caused by Missing Values (Incorrect Output)

Areas of World Continents		
Name	Continent	TotalArea
Bermuda		876,800
Iceland		876,800
Kalaallit Nunaat		876,800
Algeria	Africa	11,299,595
Angola	Africa	11,299,595
Benin	Africa	11,299,595
Botswana	Africa	11,299,595
Burkina Faso	Africa	11,299,595
Burundi	Africa	11,299,595
Cameroon	Africa	11,299,595
Cape Verde	Africa	11,299,595
Central African Republic	Africa	11,299,595

To correct the query from the previous example, you can write a WHERE clause to exclude the missing values from the results:

```
/* corrected output */

proc sql outobs=12;
  title 'Areas of World Continents';
  select Name format=$25.,
         Continent,
```

```

        sum(Area) format=comma12. as TotalArea
from sql.countries
where Continent is not missing
group by Continent
order by Continent, Name;

```

**Output 2.48** Adjusting the Query to Avoid Errors Due to Missing Values (Corrected Output)

Areas of World Continents		
Name	Continent	TotalArea
Algeria	Africa	11,299,595
Angola	Africa	11,299,595
Benin	Africa	11,299,595
Botswana	Africa	11,299,595
Burkina Faso	Africa	11,299,595
Burundi	Africa	11,299,595
Cameroon	Africa	11,299,595
Cape Verde	Africa	11,299,595
Central African Republic	Africa	11,299,595
Chad	Africa	11,299,595
Comoros	Africa	11,299,595
Congo	Africa	11,299,595

*Note:* Aggregate functions, such as the SUM function, can cause the same calculation to repeat for every row. This occurs whenever PROC SQL remerges data. See “Remerging Summary Statistics” on page 42 for more information about remerging.  $\Delta$

---

## Filtering Grouped Data

You can use a HAVING clause with a GROUP BY clause to filter grouped data. The HAVING clause affects groups in a way that is similar to the way in which a WHERE clause affects individual rows. When you use a HAVING clause, PROC SQL displays only the groups that satisfy the HAVING expression.

---

### Using a Simple HAVING Clause

The following example groups the features in the SQL.FEATURES table by type and then displays only the numbers of islands, oceans, and seas:

```

proc sql;
  title 'Numbers of Islands, Oceans, and Seas';
  select Type, count(*) as Number
  from sql.features
  group by Type
  having Type in ('Island', 'Ocean', 'Sea')
  order by Type;

```

**Output 2.49** Using a Simple HAVING Clause

Numbers of Islands, Oceans, and Seas	
Type	Number
Island	6
Ocean	4
Sea	13

**Choosing between HAVING and WHERE**

The differences between the HAVING clause and the WHERE clause are shown in the following table. Because you use the HAVING clause when you work with groups of data, queries that contain a HAVING clause usually also contain the following:

- a GROUP BY clause
- an aggregate function.

*Note:* When you use a HAVING clause without a GROUP BY clause, PROC SQL treats the HAVING clause as if it were a WHERE clause and provides a message in the log that informs you that this occurred.  $\Delta$

**Table 2.7** Differences between the HAVING Clause and WHERE Clause

HAVING clause attributes	WHERE clause attributes
is typically used to specify conditions for including or excluding groups of rows from a table.	is used to specify conditions for including or excluding individual rows from a table.
must follow the GROUP BY clause in a query, if used with a GROUP BY clause.	must precede the GROUP BY clause in a query, if used with a GROUP BY clause.
is affected by a GROUP BY clause; when there is no GROUP BY clause, the HAVING clause is treated like a WHERE clause.	is not affected by a GROUP BY clause.
is processed after the GROUP BY clause and any aggregate functions.	is processed before a GROUP BY clause, if there is one, and before any aggregate functions.



## Using HAVING with Aggregate Functions

The following query returns the populations of all continents that have more than 15 countries:

```
proc sql;
  title 'Total Populations of Continents with More than 15 Countries';
  select Continent,
         sum(Population) as TotalPopulation format=comma16.,
         count(*) as Count
  from sql.countries
  group by Continent
  having count(*) gt 15
  order by Continent;
```

The HAVING expression contains the COUNT function, which counts the number of rows within each group.

**Output 2.50** Using HAVING with the COUNT Function

Total Populations of Continents with More than 15 Countries		
Continent	TotalPopulation	Count
Africa	710,529,592	53
Asia	3,381,858,879	48
Central America and Caribbean	66,815,930	25
Europe	813,481,724	51

## Validating a Query

The VALIDATE statement enables you to check the syntax of a query for correctness without submitting it to PROC SQL. PROC SQL displays a message in the log to indicate whether the syntax is correct.

```
proc sql;
  validate
  select Name, Statehood
  from sql.unitedstates
  where Statehood lt '01Jan1800'd;
```

**Output 2.51** Validating a Query (Partial Log)

```
3 proc sql;
4   validate
5     select Name, Statehood
6       from sql.unitedstates
7       where Statehood lt '01Jan1800'd;
NOTE: PROC SQL statement has valid syntax.
```

The following example shows an invalid query and the corresponding log message:


```
proc sql;
  validate
    select Name, Statehood
    from sql.unitedstates
    where lt '01Jan1800'd;
```

**Output 2.52** Validating an Invalid Query (Partial Log)

```
3 proc sql;
4   validate
5     select Name, Statehood
6     from sql.unitedstates
7     where lt '01Jan1800'd;
          -----
          22
          76
ERROR 22-322: Syntax error, expecting one of the following: !, !!, &, *, **,
+, -, /, <, <=, <>, =, >, >=, ?, AND, CONTAINS, EQ, GE, GROUP,
GT, HAVING, LE, LIKE, LT, NE, OR, ORDER, ^=, |, ||, ~=.
```

ERROR 76-322: Syntax error, statement will be ignored.

NOTE: The SAS System stopped processing this step because of errors.

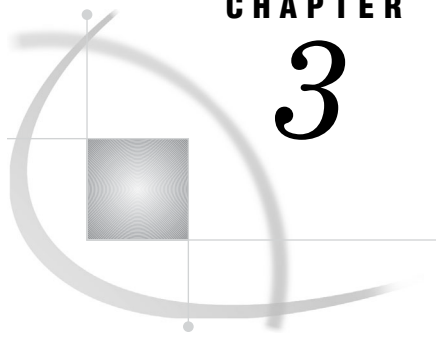

## CHAPTER

## 3

# Retrieving Data from Multiple Tables

<i>Introduction</i>	56
<i>Selecting Data from More Than One Table by Using Joins</i>	56
<i>Inner Joins</i>	57
<i>Using Table Aliases</i>	58
<i>Specifying the Order of Join Output</i>	59
<i>Creating Inner Joins Using INNER JOIN Keywords</i>	59
<i>Joining Tables Using Comparison Operators</i>	59
<i>The Effects of Null Values on Joins</i>	60
<i>Creating Multicolumn Joins</i>	62
<i>Selecting Data from More Than Two Tables</i>	63
<i>Showing Relationships within a Single Table Using Self-Joins</i>	64
<i>Outer Joins</i>	65
<i>Including Nonmatching Rows with the Left Outer Join</i>	65
<i>Including Nonmatching Rows with the Right Outer Join</i>	66
<i>Selecting All Rows with the Full Outer Join</i>	67
<i>Specialty Joins</i>	68
<i>Including All Combinations of Rows with the Cross Join</i>	68
<i>Including All Rows with the Union Join</i>	69
<i>Matching Rows with a Natural Join</i>	69
<i>Using the Coalesce Function in Joins</i>	70
<i>Comparing DATA Step Match-Merges with PROC SQL Joins</i>	71
<i>When All of the Values Match</i>	71
<i>When Only Some of the Values Match</i>	72
<i>When the Position of the Values Is Important</i>	73
<i>Using Subqueries to Select Data</i>	74
<i>Single-Value Subqueries</i>	75
<i>Multiple-Value Subqueries</i>	75
<i>Correlated Subqueries</i>	76
<i>Testing for the Existence of a Group of Values</i>	77
<i>Multiple Levels of Subquery Nesting</i>	78
<i>Combining a Join with a Subquery</i>	79
<i>When to Use Joins and Subqueries</i>	80
<i>Combining Queries with Set Operators</i>	81
<i>Working with Two or More Query Results</i>	81
<i>Producing Unique Rows from Both Queries (UNION)</i>	82
<i>Producing Rows That Are in Only the First Query Result (EXCEPT)</i>	83
<i>Producing Rows That Belong to Both Query Results (INTERSECT)</i>	84
<i>Concatenating Query Results (OUTER UNION)</i>	85
<i>Producing Rows from the First Query or the Second Query</i>	86

## Introduction

This chapter shows you how to

- select data from more than one table by joining the tables together
- use subqueries to select data from one table based on data values from another table
- combine the results of more than one query by using set operators.

*Note:* Unless otherwise noted, the PROC SQL operations that are shown in this chapter apply to views as well as tables. For more information about views, see Chapter 4, “Creating and Updating Tables and Views,” on page 89.  $\triangle$

## Selecting Data from More Than One Table by Using Joins

The data that you need for a report could be located in more than one table. In order to select the data from the tables, *join* the tables in a query. Joining tables enables you to select data from multiple tables as if the data were contained in one table. Joins do not alter the original tables.

The most basic type of join is simply two tables that are listed in the FROM clause of a SELECT statement. The following query joins the two tables that are shown in Output 3.1 and creates Output 3.2.

```
proc sql;
  title 'Table One and Table Two';
  select *
    from one, two;
```

**Output 3.1** Table One and Table Two

Table One	
X	Y
1	2
2	3

Table Two	
X	Z
2	5
3	6
4	9

**Output 3.2** Cartesian Product of Table One and Table Two

Table One and Table Two			
X	Y	X	Z
1	2	2	5
1	2	3	6
1	2	4	9
2	3	2	5
2	3	3	6
2	3	4	9

Joining tables in this way returns the *Cartesian product* of the tables. Each row from the first table is combined with every row from the second table. When you run this query, the following message is written to the SAS log:

**Output 3.3** Cartesian Product Log Message

NOTE: The execution of this query involves performing one or more Cartesian product joins that can not be optimized.


The Cartesian product of large tables can be huge. Typically, you want a subset of the Cartesian product. You specify the subset by declaring the join type.

There are two types of joins:

- Inner Joins* return a result table for all the rows in a table that have one or more matching rows in the other table or tables that are listed in the FROM clause.
- Outer Joins* are inner joins that are augmented with rows that did not match with any row from the other table in the join. There are three kinds of outer joins: left, right, and full.

---

## Inner Joins



An inner join returns only the subset of rows from the first table that matches rows from the second table. You can specify the columns that you want to be compared for matching values in a WHERE clause.

The following code adds a WHERE clause to the previous query. The WHERE clause specifies that only rows whose values in column X of Table One match values in column X of Table Two should appear in the output. Compare this query's output to Output 3.2.

```
proc sql;
  select * from one, two
  where one.x=two.x;
```

**Output 3.4** Table One and Table Two Joined

Table One and Table Two			
X	Y	X	Z
2	3	2	5

The output contains only one row because only one value in column X matches from each table. In an inner join, only the matching rows are selected. Outer joins can return nonmatching rows; they are covered in “Outer Joins” on page 65.

Note that the column names in the WHERE clause are prefixed by their table names. This is known as *qualifying* the column names, and it is necessary when you specify columns that have the same name from more than one table. Qualifying the column name avoids creating an ambiguous column reference.

## Using Table Aliases

A table *alias* is a temporary, alternate name for a table. You specify table aliases in the FROM clause. Table aliases are used in joins to qualify column names and can make a query easier to read by abbreviating table names.

The following example compares the oil production of countries to their oil reserves by joining the OILPROD and OILRSRVS tables on their Country columns. Because the Country columns are common to both tables, they are qualified with their table aliases. You could also qualify the columns by prefixing the column names with the table names.

*Note:* The AS keyword is optional.  $\Delta$

```
proc sql outobs=6;
  title 'Oil Production/Reserves of Countries';
  select * from sql.oilprod as p, sql.oilrsrvs as r
    where p.country = r.country;
```

**Output 3.5** Abbreviating Column Names by Using Table Aliases

Oil Production/Reserves of Countries			
Country	Barrels PerDay	Country	Barrels
Algeria	1,400,000	Algeria	9,200,000,000
Canada	2,500,000	Canada	7,000,000,000
China	3,000,000	China	25,000,000,000
Egypt	900,000	Egypt	4,000,000,000
Indonesia	1,500,000	Indonesia	5,000,000,000
Iran	4,000,000	Iran	90,000,000,000

Note that each table’s Country column is displayed. Typically, once you have determined that a join is functioning correctly, you include just one of the matching columns in the SELECT clause.

## Specifying the Order of Join Output

You can order the output of joined tables by one or more columns from either table. The next example's output is ordered in descending order by the `BarrelsPerDay` column. It is not necessary to qualify `BarrelsPerDay`, because the column exists only in the `OILPROD` table.

```
proc sql outobs=6;
  title 'Oil Production/Reserves of Countries';
  select p.country, barrelsperday 'Production', barrels 'Reserves'
  from sql.oilprod p, sql.oilrsrvs r
  where p.country = r.country
  order by barrelsperday desc;
```

**Output 3.6** Ordering the Output of Joined Tables

Oil Production/Reserves of Countries		
Country	Production	Reserves
Saudi Arabia	9,000,000	260,000,000,000
United States of America	8,000,000	30,000,000,000
Iran	4,000,000	90,000,000,000
Norway	3,500,000	11,000,000,000
Mexico	3,400,000	50,000,000,000
China	3,000,000	25,000,000,000

## Creating Inner Joins Using INNER JOIN Keywords

The `INNER JOIN` keywords can be used to join tables. The `ON` clause replaces the `WHERE` clause for specifying columns to join. `PROC SQL` provides these keywords primarily for compatibility with the other joins (`OUTER`, `RIGHT`, and `LEFT JOIN`). Using `INNER JOIN` with an `ON` clause provides the same functionality as listing tables in the `FROM` clause and specifying join columns with a `WHERE` clause.

This code produces the same output as the previous code but uses the `INNER JOIN` construction.

```
proc sql ;
  select p.country, barrelsperday 'Production', barrels 'Reserves'
  from sql.oilprod p inner join sql.oilrsrvs r
  on p.country = r.country
  order by barrelsperday desc;
```

## Joining Tables Using Comparison Operators

Tables can be joined by using comparison operators other than the equal sign (`=`) in the `WHERE` clause (for a list of comparison operators, see “Retrieving Rows Based on a Comparison” on page 32). In this example, all U.S. cities in the `USCITYCOORDS` table are selected that are south of Cairo, Egypt. The compound `WHERE` clause specifies the city of Cairo in the `WORLDCITYCOORDS` table and joins `USCITYCOORDS` and `WORLDCITYCOORDS` on their `Latitude` columns, using a less-than (`<`) operator.

```
proc sql;
  title 'US Cities South of Cairo, Egypt';
  select us.City, us.State, us.Latitude, world.city, world.latitude
  from sql.worldcitycoords world, sql.uscitycoords us
```

```

where world.city = 'Cairo' and
      us.latitude lt world.latitude;

```

**Output 3.7** Using Comparison Operators to Join Tables

US Cities South of Cairo, Egypt				
City	State	Latitude	City	Latitude
Honolulu	HI	21	Cairo	30
Key West	FL	24	Cairo	30
Miami	FL	26	Cairo	30
San Antonio	TX	29	Cairo	30
Tampa	FL	28	Cairo	30

When you run this query, the following message is written to the SAS log:

**Output 3.8** Comparison Query Log Message

```

NOTE: The execution of this query involves performing one or more Cartesian
      product joins that can not be optimized.

```

Recall that you see this message when you run a query that joins tables without specifying matching columns in a WHERE clause. PROC SQL also displays this message whenever tables are joined by using an inequality operator.

**The Effects of Null Values on Joins**

Most database products treat nulls as distinct entities and do not match them in joins. PROC SQL treats nulls as missing values and as matches for joins. Any null will match with any other null of the same type (character or numeric) in a join.

The following example joins Table One and Table Two on column B. There are null values in column B of both tables. Notice in the output that the null value in row c of Table One matches all the null values in Table Two. This is probably not the intended result for the join.

```

proc sql;
  title 'One and Two Joined';
  select one.a 'One', one.b, two.a 'Two', two.b
  from one, two
  where one.b=two.b;

```



**Output 3.9** Joining Tables That Contain Null Values

Table One	
a	b
a	1
b	2
c	.
d	4

Table Two	
a	b
a	1
b	2
c	.
d	4
e	.
f	.

One and Two Joined			
One	b	Two	b
a	1	a	1
b	2	b	2
c	.	c	.
d	4	d	4
c	.	e	.
c	.	f	.

In order to specify only the nonmissing values for the join, use the IS NOT MISSING operator:

```
proc sql;
  select one.a 'One', one.b, two.a 'Two', two.b
  from one, two
  where one.b=two.b and
        one.b is not missing;
```

**Output 3.10** Results of Adding IS NOT MISSING to Joining Tables That Contain Null Values

One and Two Joined			
One	b	Two	b
a	1	a	1
b	2	b	2
d	4	d	4

## Creating Multicolumn Joins

When a row is distinguished by a combination of values in more than one column, use all the necessary columns in the join. For example, a city name could exist in more than one country. To select the correct city, you must specify both the city and country columns in the joining query's WHERE clause.

This example displays the latitude and longitude of capital cities by joining the COUNTRIES table with the WORLDCITYCOORDS table. To minimize the number of rows in the example output, the first part of the WHERE expression selects capitals with names that begin with the letter *L* from the COUNTRIES table.

```
proc sql;
  title 'Coordinates of Capital Cities';
  select Capital format=$12., Name format=$12.,
         City format=$12., Country format=$12.,
         Latitude, Longitude
  from sql.countries, sql.worldcitycoords
  where Capital like 'L%' and
         Capital = City;
```

London occurs once as a capital city in the COUNTRIES table. However, in WORLDCITYCOORDS, London is found twice: as a city in England and again as a city in Canada. Specifying only **Capital = City** in the WHERE expression yields the following incorrect output:

**Output 3.11** Selecting Capital City Coordinates (incorrect output)

Coordinates of Capital Cities					
Capital	Name	City	Country	Latitude	Longitude
La Paz	Bolivia	La Paz	Bolivia	-16	-69
London	England	London	Canada	43	-81
Lima	Peru	Lima	Peru	-13	-77
Lisbon	Portugal	Lisbon	Portugal	39	-10
London	England	London	England	51	0

Notice in the output that the inner join incorrectly matches London, England, to both London, Canada, and London, England. By also joining the country name columns together (COUNTRIES.Name to WORLDCITYCOORDS.Country), the rows match correctly.

```
proc sql;
  title 'Coordinates of Capital Cities';
  select Capital format=$12., Name format=$12.,
         City format=$12., Country format=$12.,
         latitude, longitude
  from sql.countries, sql.worldcitycoords
  where Capital like 'L%' and
         Capital = City and
         Name = Country;
```

**Output 3.12** Selecting Capital City Coordinates (correct output)

Coordinates of Capital Cities					
Capital	Name	City	Country	Latitude	Longitude
La Paz	Bolivia	La Paz	Bolivia	-16	-69
Lima	Peru	Lima	Peru	-13	-77
Lisbon	Portugal	Lisbon	Portugal	39	-10
London	England	London	England	51	0

**Selecting Data from More Than Two Tables**

The data that you need could be located in more than two tables. For example, if you want to show the coordinates of the capitals of the states in the United States, then you need to join the UNITEDSTATES table, which contains the state capitals, with the USCITYCOORDS table, which contains the coordinates of cities in the United States. Because cities must be joined along with their states for an accurate join (similarly to the previous example), you must join the tables on both the city and state columns of the tables.

Joining the cities, by joining the UNITEDSTATES.Capital column to the USCITYCOORDS.City column, is straightforward. However, in the UNITEDSTATES table the Name column contains the full state name, while in USCITYCOORDS the states are specified by their postal code. It is therefore impossible to directly join the two tables on their state columns. To solve this problem, it is necessary to use the POSTALCODES table, which contains both the state names and their postal codes, as an intermediate table to make the correct relationship between UNITEDSTATES and USCITYCOORDS. The correct solution joins the UNITEDSTATES.Name column to the POSTALCODES.Name column (matching the full state names), and the POSTALCODES.Code column to the USCITYCOORDS.State column (matching the state postal codes).

```

title 'Coordinates of State Capitals';
proc sql outobs=10;
  select us.Capital format=$15., us.Name 'State' format=$15.,
         pc.Code, c.Latitude, c.Longitude
  from sql.unitedstates us, sql.postalcodes pc,
       sql.uscitycoords c
  where us.Capital = c.City and
        us.Name = pc.Name and
        pc.Code = c.State;

```

**Output 3.13** Selecting Data from More Than Two Tables

Coordinates of State Capitals				
Capital	State	Code	Latitude	Longitude
Albany	New York	NY	43	-74
Annapolis	Maryland	MD	39	-77
Atlanta	Georgia	GA	34	-84
Augusta	Maine	ME	44	-70
Austin	Texas	TX	30	-98
Baton Rouge	Louisiana	LA	31	-91
Bismarck	North Dakota	ND	47	-101
Boise	Idaho	ID	43	-116
Boston	Massachusetts	MA	42	-72
Carson City	Nevada	NV	39	-120

**Showing Relationships within a Single Table Using Self-Joins**

When you need to show comparative relationships between values in a table, it is sometimes necessary to join columns within the same table. Joining a table to itself is called a *self-join*, or *reflexive join*. You can think of a self-join as PROC SQL making an internal copy of a table and joining the table to its copy.

For example, the following code uses a self-join to select cities that have average yearly high temperatures equal to the average yearly low temperatures of other cities.

```
proc sql;
  title "Cities' High Temps = Cities' Low Temps";
  select High.City format $12., High.Country format $12.,
         High.AvgHigh, ' | ',
         Low.City format $12., Low.Country format $12.,
         Low.AvgLow
  from sql.worldtemps High, sql.worldtemps Low
  where High.AvgHigh = Low.AvgLow and
         High.city ne Low.city and
         High.country ne Low.country;
```

Notice that the WORLDTEMPS table is assigned two aliases, **High** and **Low**. Conceptually, this makes a copy of the table so that a join can be made between the table and its copy. The WHERE clause selects those rows that have high temperature equal to low temperature.

The WHERE clause also prevents a city from being joined to itself (**City ne City** and **Country ne Country**), although, in this case, it is highly unlikely that the high temperature would be equal to the low temperature for the same city.


**Output 3.14** Joining a Table to Itself (Self-Join)

Cities' High Temps = Cities' Low Temps					
City	Country	AvgHigh	City	Country	AvgLow
Amsterdam	Netherlands	70	San Juan	Puerto Rico	70
Auckland	New Zealand	75	Lagos	Nigeria	75
Auckland	New Zealand	75	Manila	Philippines	75
Berlin	Germany	75	Lagos	Nigeria	75
Berlin	Germany	75	Manila	Philippines	75
Bogota	Colombia	69	Bangkok	Thailand	69
Cape Town	South Africa	70	San Juan	Puerto Rico	70
Copenhagen	Denmark	73	Singapore	Singapore	73
Dublin	Ireland	68	Bombay	India	68
Glasgow	Scotland	65	Nassau	Bahamas	65
London	England	73	Singapore	Singapore	73
Oslo	Norway	73	Singapore	Singapore	73
Reykjavik	Iceland	57	Caracas	Venezuela	57
Stockholm	Sweden	70	San Juan	Puerto Rico	70

## Outer Joins

*Outer joins* are inner joins that are augmented with rows from one table that do not match any row from the other table in the join. The resulting output includes rows that match and rows that do not match from the join's source tables. Nonmatching rows have null values in the columns from the unmatched table. Use the ON clause instead of the WHERE clause to specify the column or columns on which you are joining the tables. However, you can continue to use the WHERE clause to subset the query result.

### Including Nonmatching Rows with the Left Outer Join



A left outer join lists matching rows and rows from the left-hand table (the first table listed in the FROM clause) that do not match any row in the right-hand table. A left join is specified with the keywords LEFT JOIN and ON.


For example, to list the coordinates of the capitals of international cities, join the COUNTRIES table, which contains capitals, with the WORLDCITYCOORDS table, which contains cities' coordinates, by using a left join. The left join lists all capitals, regardless of whether the cities exist in WORLDCITYCOORDS. Using an inner join would list only capital cities for which there is a matching city in WORLDCITYCOORDS.

```
proc sql outobs=10;
  title 'Coordinates of Capital Cities';
  select Capital format=$20., Name 'Country' format=$20.,
         Latitude, Longitude
  from sql.countries a left join sql.worldcitycoords b
  on a.Capital = b.City and
     a.Name = b.Country
  order by Capital;
```

**Output 3.15** Left Join of COUNTRIES and WORLDCITYCOORDS

Coordinates of Capital Cities			
Capital	Country	Latitude	Longitude
	Channel Islands	.	.
Abu Dhabi	United Arab Emirates	.	.
Abuja	Nigeria	.	.
Accra	Ghana	5	0
Addis Ababa	Ethiopia	9	39
Algiers	Algeria	37	3
Almaty	Kazakhstan	.	.
Amman	Jordan	32	36
Amsterdam	Netherlands	52	5
Andorra la Vella	Andorra	.	.

### Including Nonmatching Rows with the Right Outer Join




A right join, specified with the keywords `RIGHT JOIN` and `ON`, is the opposite of a left join: nonmatching rows from the right-hand table (the second table listed in the `FROM` clause) are included with all matching rows in the output. This example reverses the join of the last example; it uses a right join to select all the cities from the `WORLDCITYCOORDS` table and displays the population only if the city is the capital of a country (that is, if the city exists in the `COUNTRIES` table).

```
proc sql outobs=10;
  title 'Populations of Capitals Only';
  select City format=$20., Country 'Country' format=$20.,
         Population
  from sql.countries right join sql.worldcitycoords
    on Capital = City and
       Name = Country
  order by City;
```

**Output 3.16** Right Join of COUNTRIES and WORLDCITYCOORDS

Populations of Capitals Only		
City	Country	Population
Abadan	Iran	.
Acapulco	Mexico	.
Accra	Ghana	17395511
Adana	Turkey	.
Addis Ababa	Ethiopia	59291170
Adelaide	Australia	.
Aden	Yemen	.
Ahmenabad	India	.
Algiers	Algeria	28171132
Alice Springs	Australia	.

## Selecting All Rows with the Full Outer Join



A full outer join, specified with the keywords `FULL JOIN` and `ON`, selects all matching and nonmatching rows. This example displays the first ten matching and nonmatching rows from the `City` and `Capital` columns of `WORLDCITYCOORDS` and `COUNTRIES`. Note that the pound sign (`#`) is used as a line split character in the labels.

```
proc sql outobs=10;
  title 'Populations and/or Coordinates of World Cities';
  select City '#City#(WORLDCITYCOORDS)' format=$20.,
         Capital '#Capital#(COUNTRIES)' format=$20.,
         Population, Latitude, Longitude
  from sql.countries full join sql.worldcitycoords
  on Capital = City and
     Name = Country;
```

**Output 3.17** Full Outer Join of COUNTRIES and WORLDCITYCOORDS

Populations and/or Coordinates of World Cities				
City (WORLDCITYCOORDS)	Capital (COUNTRIES)	Population	Latitude	Longitude
Abadan		146436	.	.
	Abu Dhabi	2818628	30	48
	Abuja	99062003	.	.
Acapulco		.	17	-100
Accra	Accra	17395511	5	0
Adana		.	37	35
Addis Ababa	Addis Ababa	59291170	9	39
Adelaide		.	-35	138
Aden		.	13	45

## Specialty Joins

Three types of joins—cross joins, union joins, and natural joins—are special cases of the standard join types.

### Including All Combinations of Rows with the Cross Join

A cross join is a Cartesian product; it returns the product of two tables. Like a Cartesian product, a cross join's output can be limited by a WHERE clause.

This example shows a cross join of the tables One and Two:

**Output 3.18** Tables One and Two

Table One	
X	Y
1	2
2	3

Table Two	
W	Z
2	5
3	6
4	9

```
proc sql;
  select *
    from one cross join two;
```

**Output 3.19** Cross Join

The SAS System			
X	Y	W	Z
1	2	2	5
1	2	3	6
1	2	4	9
2	3	2	5
2	3	3	6
2	3	4	9

Like a conventional Cartesian product, a cross join causes a note regarding Cartesian products in the SAS log.



## Including All Rows with the Union Join

A union join combines two tables without attempting to match rows. All columns and rows from both tables are included. Combining tables with a union join is similar to combining them with the OUTER UNION set operator (see “Combining Queries with Set Operators” on page 81). A union join’s output can be limited by a WHERE clause.

This example shows a union join of the same One and Two tables that were used earlier to demonstrate a cross join:

```
proc sql;
  select *
    from one union join two;
```

**Output 3.20** Union Join

X	Y	W	Z
.	.	2	5
.	.	3	6
.	.	4	9
1	2	.	.
2	3	.	.

## Matching Rows with a Natural Join

A natural join automatically selects columns from each table to use in determining matching rows. With a natural join, PROC SQL identifies columns in each table that have the same name and type; rows in which the values of these columns are equal are returned as matching rows. The ON clause is implied.

This example produces the same results as the example in “Specifying the Order of Join Output” on page 59:

```
proc sql outobs=6;
  title 'Oil Production/Reserves of Countries';
  select country, barrelsperday 'Production', barrels 'Reserve'
    from sql.oilprod natural join sql.oilrsrvs
    order by barrelsperday desc;
```

**Output 3.21** Natural Inner Join of OILPROD and OILRSRVS

Oil Production/Reserves of Countries		
Country	Production	Reserve
Saudi Arabia	9,000,000	260,000,000,000
United States of America	8,000,000	30,000,000,000
Iran	4,000,000	90,000,000,000
Norway	3,500,000	11,000,000,000
Mexico	3,400,000	50,000,000,000
China	3,000,000	25,000,000,000

The advantage of using a natural join is that the coding is streamlined. The ON clause is implied, and you do not need to use table aliases to qualify column names that are common to both tables. These two queries return the same results:

```
proc sql;
  select a.W, a.X, Y, Z
  from table1 a left join table2 b
  on a.W=b.W and a.X=b.X
  order by a.W;

proc sql;
  select W, X, Y, Z
  from table1 natural left join table2
  order by W;
```

If you specify a natural join on tables that do not have at least one column with a common name and type, then the result is a Cartesian product. You can use a WHERE clause to limit the output.

Because the natural join makes certain assumptions about what you want to accomplish, you should know your data thoroughly before using it. You could get unexpected or incorrect results if, for example, you are expecting two tables to have only one column in common when they actually have two. You can use the FEEDBACK option to see exactly how PROC SQL is implementing your query. See “Using PROC SQL Options to Create and Debug Queries” on page 112 for more information about the FEEDBACK option.

A natural join assumes that you want to base the join on equal values of all pairs of common columns. To base the join on inequalities or other comparison operators, use standard inner or outer join syntax.

---

## Using the Coalesce Function in Joins

As you can see from the previous examples, the nonmatching rows in outer joins contain missing values. By using the COALESCE function, you can overlay columns so that only the row from the table that contains data is listed. Recall that COALESCE takes a list of columns as its arguments and returns the first nonmissing value that it encounters.

This example adds the COALESCE function to the previous example to overlay the COUNTRIES.Capital, WORLDCITYCOORDS.City, and COUNTRIES.Name columns. COUNTRIES.Name is supplied as an argument to COALESCE because some islands do not have capitals.

```
proc sql outobs=10;
  title 'Populations and/or Coordinates of World Cities';
  select coalesce(Capital, City, Name) format=$20. 'City',
         coalesce(Name, Country) format=$20. 'Country',
         Population, Latitude, Longitude
  from sql.countries full join sql.worldcitycoords
  on Capital = City and
     Name = Country;
```

**Output 3.22** Using COALESCE in Full Outer Join of COUNTRIES and WORLDCITYCOORDS

Populations and/or Coordinates of World Cities				
City	Country	Population	Latitude	Longitude
Channel Islands	Channel Islands	146436	.	.
Abadan	Iran	.	30	48
Abu Dhabi	United Arab Emirates	2818628	.	.
Abuja	Nigeria	99062003	.	.
Acapulco	Mexico	.	17	-100
Accra	Ghana	17395511	5	0
Adana	Turkey	.	37	35
Addis Ababa	Ethiopia	59291170	9	39
Adelaide	Australia	.	-35	138
Aden	Yemen	.	13	45

COALESCE can be used in both inner and outer joins. For more information about COALESCE, see “Replacing Missing Values” on page 24.

---

## Comparing DATA Step Match-Merges with PROC SQL Joins

Many SAS users are familiar with using a DATA step to merge data sets. This section compares merges to joins. DATA step match-merges and PROC SQL joins can produce the same results. However, a significant difference between a match-merge and a join is that you do not have to sort the tables before you join them.

### When All of the Values Match

When all of the values match in the BY variable and there are no duplicate BY variables, you can use an inner join to produce the same result as a match-merge. To demonstrate this result, here are two tables that have the column Flight in common. The values of Flight are the same in both tables:

FLTSUPER		FLTDEST	
Flight	Supervisor	Flight	Destination
145	Kang	145	Brussels
150	Miller	150	Paris
155	Evanko	155	Honolulu

FLTSUPER and FLTDEST are already sorted by the matching column Flight. A DATA step merge produces Output 3.23.

```
data merged;
  merge FltSuper FltDest;
  by Flight;
run;

proc print data=merged noobs;
  title 'Table MERGED';
run;
```

**Output 3.23** Merged Tables When All the Values Match

Table MERGED			
Flight	Supervisor	Destination	
145	Kang	Brussels	
150	Miller	Paris	
155	Evanko	Honolulu	

With PROC SQL, presorting the data is not necessary. The following PROC SQL join gives the same result as that shown in Output 3.23.

```
proc sql;
  title 'Table MERGED';
  select s.flight, Supervisor, Destination
    from fltsuper s, fltdest d
   where s.Flight=d.Flight;
```

**When Only Some of the Values Match**

When only some of the values match in the BY variable, you can use an outer join to produce the same result as a match-merge. To demonstrate this result, here are two tables that have the column Flight in common. The values of Flight are not the same in both tables:

FLTSUPER		FLTDEST	
Flight	Supervisor	Flight	Destination
145	Kang	145	Brussels
150	Miller	150	Paris
155	Evanko	165	Seattle
157	Lei		

A DATA step merge produces Output 3.24:

```
data merged;
  merge fltsuper fltdest;
  by flight;
run;
proc print data=merged noobs;
  title 'Table MERGED';
run;
```

**Output 3.24** Merged Tables When Some of the Values Match

Table MERGED		
Flight	Supervisor	Destination
145	Kang	Brussels
150	Miller	Paris
155	Evanko	
157	Lei	
165		Seattle

To get the same result with PROC SQL, use an outer join so that the query result will contain the nonmatching rows from the two tables. In addition, use the COALESCE function to overlay the Flight columns from both tables. The following PROC SQL join gives the same result as that shown in Output 3.24:

```
proc sql;
  select coalesce(s.Flight,d.Flight) as Flight, Supervisor, Destination
  from fltsuper s full join fltdest d
  on s.Flight=d.Flight;
```

**When the Position of the Values Is Important**

When you want to merge two tables and the position of the values is important, you might need to use a DATA step merge. To demonstrate this idea, here are two tables to consider:

FLTSUPER		FLTDEST	
Flight	Supervisor	Flight	Destination
145	Kang	145	Brussels
145	Ramirez	145	Edmonton
150	Miller	150	Paris
150	Picard	150	Madrid
155	Evanko	165	Seattle
157	Lei		

For Flight 145, **Kang** matches with **Brussels** and **Ramirez** matches with **Edmonton**. Because the DATA step merges data based on the position of values in BY groups, the values of Supervisor and Destination match appropriately. A DATA step merge produces Output 3.25:

```
data merged;
  merge fltsuper fltdest;
  by flight;
run;
proc print data=merged noobs;
  title 'Table MERGED';
run;
```

**Output 3.25** Match-Merge of the FLTSUPER and FLTDEST Tables

Table MERGED		
Flight	Supervisor	Destination
145	Kang	Brussels
145	Ramirez	Edmonton
150	Miller	Paris
150	Picard	Madrid
155	Evanko	
157	Lei	
165		Seattle

PROC SQL does not process joins according to the position of values in BY groups. Instead, PROC SQL processes data only according to the data values. Here is the result of an inner join for FLTSUPER and FLTDEST:

```
proc sql;
  title 'Table JOINED';
  select *
    from fltsuper s, fltdest d
   where s.Flight=d.Flight;
```

**Output 3.26** PROC SQL Join of the FLTSUPER and FLTDEST Tables

Table JOINED			
Flight	Supervisor	Flight	Destination
145	Kang	145	Brussels
145	Kang	145	Edmonton
145	Ramirez	145	Brussels
145	Ramirez	145	Edmonton
150	Miller	150	Paris
150	Miller	150	Madrid
150	Picard	150	Paris
150	Picard	150	Madrid

PROC SQL builds the Cartesian product and then lists the rows that meet the WHERE clause condition. The WHERE clause returns two rows for each supervisor, one row for each destination. Because Flight has duplicate values and there is no other matching column, there is no way to associate **Kang** only with **Brussels**, **Ramirez** only with **Edmonton**, and so on.

For more information about DATA step match-merges, see *SAS Language Reference: Dictionary*.

---

## Using Subqueries to Select Data

While a table join combines multiple tables into a new table, a subquery (enclosed in parentheses) selects rows from one table based on values in another table. A subquery, or inner query, is a query-expression that is nested as part of another query-expression.

Depending on the clause that contains it, a subquery can return a single value or multiple values. Subqueries are most often used in the WHERE and the HAVING expressions.

---

## Single-Value Subqueries

A single-value subquery returns a single row and column. It can be used in a WHERE or HAVING clause with a comparison operator. The subquery must return only one value, or else the query fails and an error message is printed to the log.

This query uses a subquery in its WHERE clause to select U.S. states that have a population greater than Belgium. The subquery is evaluated first, and then it returns the population of Belgium to the outer query.

```
proc sql;
  title 'U.S. States with Population Greater than Belgium';
  select Name 'State' , population format=comma10.
    from sql.unitedstates
   where population gt
         (select population from sql.countries
          where name = "Belgium");
```

Internally, this is what the query looks like after the subquery has executed:

```
proc sql;
  title 'U.S. States with Population Greater than Belgium';
  select Name 'State', population format=comma10.
    from sql.unitedstates
   where population gt 10162614;
```

The outer query lists the states whose populations are greater than the population of Belgium.

### Output 3.27 Single-Value Subquery

U.S. States with Population Greater than Belgium	
State	Population
California	31,518,948
Florida	13,814,408
Illinois	11,813,091
New York	18,377,334
Ohio	11,200,790
Pennsylvania	12,167,566
Texas	18,209,994

---

## Multiple-Value Subqueries

A multiple-value subquery can return more than one value from one column. It is used in a WHERE or HAVING expression that contains IN or a comparison operator that is modified by ANY or ALL. This example displays the populations of oil-producing countries. The subquery first returns all countries that are found in the OILPROD

table. The outer query then matches countries in the COUNTRIES table to the results of the subquery.

```
proc sql outobs=5;
  title 'Populations of Major Oil Producing Countries';
  select name 'Country', Population format=comma15.
    from sql.countries
   where Name in
      (select Country from sql.oilprod);
```

**Output 3.28** Multiple-Value Subquery Using IN

Populations of Major Oil Producing Countries	
Country	Population
-----	
Algeria	28,171,132
Canada	28,392,302
China	1,202,215,077
Egypt	59,912,259
Indonesia	202,393,859

If you use the NOT IN operator in this query, then the query result will contain all the countries that are *not* contained in the OILPROD table.

```
proc sql outobs=5;
  title 'Populations of NonMajor Oil Producing Countries';
  select name 'Country', Population format=comma15.
    from sql.countries
   where Name not in
      (select Country from sql.oilprod);
```

**Output 3.29** Multiple-Value Subquery Using NOT IN

Populations of NonMajor Oil Producing Countries	
Country	Population
-----	
Afghanistan	17,070,323
Albania	3,407,400
Andorra	64,634
Angola	9,901,050
Antigua and Barbuda	65,644

---

## Correlated Subqueries

The previous subqueries have been simple subqueries that are self-contained and that execute independently of the outer query. A *correlated* subquery requires a value or values to be passed to it by the outer query. After the subquery runs, it passes the results back to the outer query. Correlated subqueries can return single or multiple values.



This example selects all major oil reserves of countries on the continent of Africa.

```
proc sql;
  title 'Oil Reserves of Countries in Africa';
  select * from sql.oilrsrvs o
    where 'Africa' =
      (select Continent from sql.countries c
       where c.Name = o.Country);
```

The outer query selects the first row from the OILRSRVS table and then passes the value of the Country column, **Algeria**, to the subquery. At this point, the subquery internally looks like this:

```
(select Continent from sql.countries c
 where c.Name = 'Algeria');
```

The subquery selects that country from the COUNTRIES table. The subquery then passes the country's continent back to the WHERE clause in the outer query. If the continent is Africa, then the country is selected and displayed. The outer query then selects each subsequent row from the OILRSRVS table and passes the individual values of Country to the subquery. The subquery returns the appropriate values of Continent to the outer query for comparison in its WHERE clause.

Note that the WHERE clause uses an = (equal) operator. You can use an = if the subquery returns only a single value. However, if the subquery returns multiple values, then you must use IN or a comparison operator with ANY or ALL. For detailed information about the operators that are available for use with subqueries, see the section about the SQL procedure in the *Base SAS Procedures Guide*.

### Output 3.30 Correlated Subquery

Oil Reserves of Countries in Africa	
Country	Barrels
Algeria	9,200,000,000
Egypt	4,000,000,000
Gabon	1,000,000,000
Libya	30,000,000,000
Nigeria	16,000,000,000

## Testing for the Existence of a Group of Values

The EXISTS condition tests for the existence of a set of values. An EXISTS condition is true if any rows are produced by the subquery, and it is false if no rows are produced. Conversely, the NOT EXISTS condition is true when a subquery produces an empty table.

This example produces the same result as Output 3.30. EXISTS checks for the existence of countries that have oil reserves on the continent of Africa. Note that the WHERE clause in the subquery now contains the condition **Continent = 'Africa'** that was in the outer query in the previous example.

```
proc sql;
  title 'Oil Reserves of Countries in Africa';
  select * from sql.oilrsrvs o
    where exists
```

```
(select Continent from sql.countries c
where o.Country = c.Name and
Continent = 'Africa');
```

**Output 3.31** Testing for the Existence of a Group of Values

Oil Reserves of Countries in Africa	
Country	Barrels
Algeria	9,200,000,000
Egypt	4,000,000,000
Gabon	1,000,000,000
Libya	30,000,000,000
Nigeria	16,000,000,000

## Multiple Levels of Subquery Nesting

Subqueries can be nested so that the innermost subquery returns a value or values to be used by the next outer query. Then, that subquery's value or values are used by the next outer query, and so on. Evaluation always begins with the innermost subquery and works outward.

This example lists cities in Africa that are in countries with major oil reserves.

- ❶ The innermost query is evaluated first. It returns countries that are located on the continent of Africa.
- ❷ The outer subquery is evaluated. It returns a subset of African countries that have major oil reserves by comparing the list of countries that was returned by the inner subquery against the countries in OILRSRVS.
- ❸ Finally, the WHERE clause in the outer query lists the coordinates of the cities that exist in the WORLDCITYCOORDS table whose countries match the results of the outer subquery.

```
proc sql;
title 'Coordinates of African Cities with Major Oil Reserves';
select * from sql.worldcitycoords
❸ where country in
❷ (select Country from sql.oilrsrvs o
where o.Country in =
❶ (select Name from sql.countries c
where c.Continent='Africa'));
```

**Output 3.32** Multiple Levels of Subquery Nesting

Coordinates of African Cities with Major Oil Reserves			
City	Country	Latitude	Longitude
Algiers	Algeria	37	3
Cairo	Egypt	30	31
Benghazi	Libya	33	21
Lagos	Nigeria	6	3

**Combining a Join with a Subquery**

You can combine joins and subqueries in a single query. Suppose that you want to find the city nearest to each city in the USCITYCOORDS table. The query must first select a city A, compute the distance from city A to every other city, and finally select the city with the minimum distance from city A. This can be done by joining the USCITYCOORDS table to itself (self-join) and then determining the closest distance between cities by using another self-join in a subquery.

This is the formula to determine the distance between coordinates:

$$\text{SQRT}(((\text{Latitude2}-\text{Latitude1})^{**2}) + ((\text{Longitude2}-\text{Longitude1})^{**2}))$$

Although the results of this formula are not exactly accurate because of the distortions caused by the curvature of the earth, they are accurate enough for this example to determine whether one city is closer than another.

```
proc sql outobs=10;
  title 'Neighboring Cities';
  select a.City format=$10., a.State,
         a.Latitude 'Lat', a.Longitude 'Long',
         b.City format=$10., b.State,
         b.Latitude 'Lat', b.Longitude 'Long',
         sqrt(((b.latitude-a.latitude)**2) +
              ((b.longitude-a.longitude)**2)) as dist format=6.1
  from sql.uscitycoords a, sql.uscitycoords b
  where a.city ne b.city and
         calculated dist =
         (select min(sqrt(((d.latitude-c.latitude)**2) +
                          ((d.longitude-c.longitude)**2)))
          from sql.uscitycoords c, sql.uscitycoords d
          where c.city = a.city and
                c.state = a.state and
                d.city ne c.city)
  order by a.city;
```

**Output 3.33** Combining a Join with a Subquery

Neighboring Cities								
City	State	Lat	Long	City	State	Lat	Long	dist
Albany	NY	43	-74	Hartford	CT	42	-73	1.4
Albuquerque	NM	36	-106	Santa Fe	NM	36	-106	0.0
Amarillo	TX	35	-102	Carlsbad	NM	32	-104	3.6
Anchorage	AK	61	-150	Nome	AK	64	-165	15.3
Annapolis	MD	39	-77	Washington	DC	39	-77	0.0
Atlanta	GA	34	-84	Knoxville	TN	36	-84	2.0
Augusta	ME	44	-70	Portland	ME	44	-70	0.0
Austin	TX	30	-98	San Antoni	TX	29	-98	1.0
Baker	OR	45	-118	Lewiston	ID	46	-117	1.4
Baltimore	MD	39	-76	Dover	DE	39	-76	0.0

The outer query joins the table to itself and determines the distance between the first city A1 in table A and city B2 (the first city that is not equal to city A1) in Table B. PROC SQL then runs the subquery. The subquery does another self-join and calculates the minimum distance between city A1 and all other cities in the table other than city A1. The outer query tests to see whether the distance between cities A1 and B2 is equal to the minimum distance that was calculated by the subquery. If they are equal, then a row that contains cities A1 and B2 with their coordinates and distance is written.

## When to Use Joins and Subqueries

Use a join or a subquery any time that you reference information from multiple tables. Joins and subqueries are often used together in the same query. In many cases, you can solve a data retrieval problem by using a join, a subquery, or both. Here are some guidelines for using joins and queries.

- If your report needs data that is from more than one table, then you must perform a join. Whenever multiple tables (or views) are listed in the FROM clause, those tables become joined.
- If you need to combine related information from different rows within a table, then you can join the table with itself.
- Use subqueries when the result that you want requires more than one query and each subquery provides a subset of the table involved in the query.
- If a membership question is asked, then a subquery is usually used. If the query requires a NOT EXISTS condition, then you must use a subquery because NOT EXISTS operates only in a subquery; the same principle holds true for the EXISTS condition.
- Many queries can be formulated as joins or subqueries. Although the PROC SQL query optimizer changes some subqueries to joins, a join is generally more efficient to process.

## Combining Queries with Set Operators

### Working with Two or More Query Results

PROC SQL can combine the results of two or more queries in various ways by using the following set operators:

- UNION                    produces all unique rows from both queries.
- EXCEPT               produces rows that are part of the first query only.
- INTERSECT              produces rows that are common to both query results.
- OUTER UNION           concatenates the query results.

The operator is used between the two queries, for example:

```
select columns from table
set-operator
select columns from table;
```

Place a semicolon after the last SELECT statement only. Set operators combine columns from two queries based on their position in the referenced tables without regard to the individual column names. Columns in the same relative position in the two queries must have the same data types. The column names of the tables in the first query become the column names of the output table. For information about using set operators with more than two query results, see the section about the SQL procedure in the *Base SAS Procedures Guide*. The following optional keywords give you more control over set operations:

#### ALL

does not suppress duplicate rows. When the keyword ALL is specified, PROC SQL does not make a second pass through the data to eliminate duplicate rows. Thus, using ALL is more efficient than not using it. ALL is not necessary with the OUTER UNION operator.

#### CORRESPONDING (CORR)

overlays columns that have the same name in both tables. When used with EXCEPT, INTERSECT, and UNION, CORR suppresses columns that are not in both tables.

Each set operator is described and used in an example based on the following two tables.

**Output 3.34** Tables Used in Set Operation Examples


Table A	
x	y
-----	
1	one
2	two
2	two
3	three

Table B	
x	z
1	one
2	two
4	four

Whereas join operations combine tables horizontally, set operations combine tables vertically. Therefore, the set diagrams that are included in each section are displayed vertically.

---

## Producing Unique Rows from Both Queries (UNION)



The UNION operator combines two query results. It produces all the unique rows that result from both queries; that is, it returns a row if it occurs in the first table, the second, or both. UNION does not return duplicate rows. If a row occurs more than once, then only one occurrence is returned.

```
proc sql;
  title 'A UNION B';
  select * from sql.a
  union
  select * from sql.b;
```

### Output 3.35 Producing Unique Rows from Both Queries (UNION)


A UNION B	
x	y
1	one
2	two
3	three
4	four

You can use the ALL keyword to request that duplicate rows remain in the output.

```
proc sql;
  title 'A UNION ALL B';
  select * from sql.a
  union all
  select * from sql.b;
```

**Output 3.36** Producing Rows from Both Queries (UNION ALL)

A UNION ALL B	
x	y
-----	
1	one
2	two
2	two
3	three
1	one
2	two
4	four

**Producing Rows That Are in Only the First Query Result (EXCEPT)**

The EXCEPT operator returns rows that result from the first query but not from the second query. In this example, the row that contains the values **3** and **three** exists in the first query (table A) only and is returned by EXCEPT.

```
proc sql;
  title 'A EXCEPT B';
  select * from sql.a
  except
  select * from sql.b;
```

**Output 3.37** Producing Rows That Are in Only the First Query Result (EXCEPT)

A EXCEPT B	
x	y
-----	
3	three

Note that the duplicated row in Table A containing the values **2** and **two** does not appear in the output. EXCEPT does not return duplicate rows that are unmatched by rows in the second query. Adding ALL keeps any duplicate rows that do not occur in the second query.

```
proc sql;
  title 'A EXCEPT ALL B';
```

```


select * from sql.a
except all
select * from sql.b;

```

**Output 3.38** Producing Rows That Are in Only the First Query Result (EXCEPT ALL)

A EXCEPT ALL B	
x	y
2	two
3	three

## Producing Rows That Belong to Both Query Results (INTERSECT)



The INTERSECT operator returns rows from the first query that also occur in the second.

```

proc sql;
  title 'A INTERSECT B';
  select * from sql.a
  intersect
  select * from sql.b;

```


**Output 3.39** Producing Rows That Belong to Both Query Results (INTERSECT)

A INTERSECT B	
x	y
1	one
2	two

The output of an INTERSECT ALL operation contains the rows produced by the first query that are matched one-to-one with a row produced by the second query. In this example, the output of INTERSECT ALL is the same as INTERSECT.



## Concatenating Query Results (OUTER UNION)



The OUTER UNION operator concatenates the results of the queries. This example concatenates tables A and B.

```
proc sql;
  title 'A OUTER UNION B';
  select * from sql.a
  outer union
  select * from sql.b;
```

**Output 3.40** Concatenating the Query Results (OUTER UNION)

A OUTER UNION B			
x	y	x	z
1	one	.	.
2	two	.	.
2	two	.	.
3	three	.	.
.	.	1	one
.	.	2	two
.	.	4	four


Notice that OUTER UNION does not overlay columns from the two tables. To overlay columns in the same position, use the CORRESPONDING keyword.

```
proc sql;
  title 'A OUTER UNION CORR B';
  select * from sql.a
  outer union corr
  select * from sql.b;
```

**Output 3.41** Concatenating the Query Results (OUTER UNION CORR)

A OUTER UNION CORR B		
x	y	z
1	one	
2	two	
2	two	
3	three	
1		one
2		two
4		four

## Producing Rows from the First Query or the Second Query



There is no keyword in PROC SQL that returns unique rows from the first and second table, but not rows that occur in both. Here is one way you can simulate this operation:

```
(query1 except query2)
union
(query2 except query1)
```

This example shows how to use this operation.


```
proc sql;
  title 'A EXCLUSIVE UNION B';
  (select * from sql.a
   except
   select * from sql.b)
 union
 (select * from sql.b
  except
  select * from sql.a);
```

**Output 3.42** Producing Rows from the First Query or the Second Query

A EXCLUSIVE UNION B	
x	y
3	three
4	four

The first EXCEPT returns one unique row from the first table (table A) only. The second EXCEPT returns one unique row from the second table (table B) only. The middle UNION combines the two results. Thus, this query returns the row from the first table that is not in the second table, as well as the row from the second table that is not in the first table.



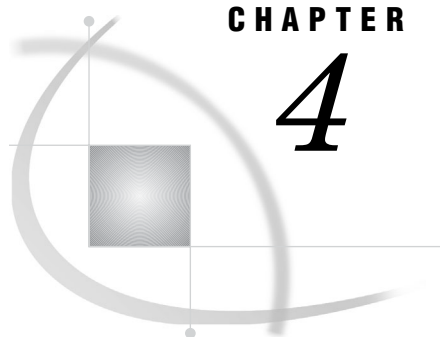

## CHAPTER

## 4

# Creating and Updating Tables and Views

<i>Introduction</i>	<b>90</b>
<i>Creating Tables</i>	<b>90</b>
<i>Creating Tables from Column Definitions</i>	<b>90</b>
<i>Creating Tables from a Query Result</i>	<b>91</b>
<i>Creating Tables Like an Existing Table</i>	<b>92</b>
<i>Copying an Existing Table</i>	<b>93</b>
<i>Using Data Set Options</i>	<b>93</b>
<i>Inserting Rows into Tables</i>	<b>93</b>
<i>Inserting Rows with the SET Clause</i>	<b>93</b>
<i>Inserting Rows with the VALUES Clause</i>	<b>94</b>
<i>Inserting Rows with a Query</i>	<b>95</b>
<i>Updating Data Values in a Table</i>	<b>96</b>
<i>Updating All Rows in a Column with the Same Expression</i>	<b>96</b>
<i>Updating Rows in a Column with Different Expressions</i>	<b>97</b>
<i>Handling Update Errors</i>	<b>98</b>
<i>Deleting Rows</i>	<b>98</b>
<i>Altering Columns</i>	<b>99</b>
<i>Adding a Column</i>	<b>99</b>
<i>Modifying a Column</i>	<b>100</b>
<i>Deleting a Column</i>	<b>101</b>
<i>Creating an Index</i>	<b>102</b>
<i>Using PROC SQL to Create Indexes</i>	<b>102</b>
<i>Tips for Creating Indexes</i>	<b>102</b>
<i>Deleting Indexes</i>	<b>103</b>
<i>Deleting a Table</i>	<b>103</b>
<i>Using SQL Procedure Tables in SAS Software</i>	<b>103</b>
<i>Creating and Using Integrity Constraints in a Table</i>	<b>103</b>
<i>Creating and Using PROC SQL Views</i>	<b>106</b>
<i>Creating Views</i>	<b>106</b>
<i>Describing a View</i>	<b>107</b>
<i>Updating a View</i>	<b>107</b>
<i>Embedding a LIBNAME in a View</i>	<b>107</b>
<i>Deleting a View</i>	<b>108</b>
<i>Specifying In-Line Views</i>	<b>108</b>
<i>Tips for Using SQL Procedure Views</i>	<b>109</b>
<i>Using SQL Procedure Views in SAS Software</i>	<b>110</b>

---

## Introduction

This chapter shows you how to

- create a table
  - update tables
  - alter existing tables
  - delete a table
  - create indexes
  - use integrity constraints in table creation
  - create views.
- 

## Creating Tables

The CREATE TABLE statement enables you to create tables without rows from column definitions or to create tables from a query result. You can also use CREATE TABLE to copy an existing table.

---

### Creating Tables from Column Definitions

You can create a new table without rows by using the CREATE TABLE statement to define the columns and their attributes. You can specify a column's name, type, length, informat, format, and label.

The following CREATE TABLE statement creates the NEWSTATES table:

```
proc sql;
  create table sql.newstates
    (state char(2),          /* 2--character column for          */
                                     /* state abbreviation              */

    date num                /* column for date of entry into the US */
      informat=date9.       /* with an informat                */
      format=date9.,        /* and format of DATE9.            */

    population num);       /* column for population           */
```

The table NEWSTATES has three columns and 0 rows. The char(2) modifier is used to change the length for State.

Use the DESCRIBE TABLE statement to verify that the table exists and to see the column attributes. The following DESCRIBE TABLE statement writes a CREATE TABLE statement to the SAS log:

```
proc sql;
  describe table sql.newstates;
```

**Output 4.1** Table Created from Column Definitions

```

1  proc sql;
2  describe table sql.newstates;
NOTE: SQL table SQL.NEWSTATES was created like:

create table SQL.NEWSTATES( bufsize=8192 )
(
  state char(2),
  date num format=DATE9. informat=DATE9.,
  population num
);

```

DESCRIBE TABLE writes a CREATE TABLE statement to the SAS log even if you did not create the table with the CREATE TABLE statement. You can also use the CONTENTS statement in the DATASETS procedure to get a description of NEWSTATES.

---

## Creating Tables from a Query Result

To create a PROC SQL table from a query result, use a CREATE TABLE statement, and place it before the SELECT statement. When a table is created this way, its data is derived from the table or view that is referenced in the query's FROM clause. The new table's column names are as specified in the query's SELECT clause list. The column attributes (the type, length, informat, and format) are the same as those of the selected source columns.

The following CREATE TABLE statement creates the DENSITIES table from the COUNTRIES table. The newly created table is not displayed in SAS output unless you query the table. Note the use of the OUTOBS option, which limits the size of the DENSITIES table to 10 rows.

```

proc sql outobs=10;
  title 'Densities of Countries';
  create table sql.densities as
    select Name 'Country' format $15.,
           Population format=comma10.0,
           Area as SquareMiles,
           Population/Area format=6.2 as Density
    from sql.countries;

  select * from sql.densities;

```

**Output 4.2** Table Created from a Query Result

Densities of Countries			
Country	Population	SquareMiles	Density
Afghanistan	17,070,323	251825	67.79
Albania	3,407,400	11100	306.97
Algeria	28,171,132	919595	30.63
Andorra	64,634	200	323.17
Angola	9,901,050	481300	20.57
Antigua and Bar	65,644	171	383.88
Argentina	34,248,705	1073518	31.90
Armenia	3,556,864	11500	309.29
Australia	18,255,944	2966200	6.15
Austria	8,033,746	32400	247.96

The following DESCRIBE TABLE statement writes a CREATE TABLE statement to the SAS log:

```
proc sql;
  describe table sql.densities;
```

**Output 4.3** SAS Log for DESCRIBE TABLE Statement for DENSITIES

```
NOTE: SQL table SQL.DENSITIES was created like:

create table SQL.DENSITIES( bufsize=8192 )
(
  Name char(35) format=$15. informat=$35. label='Country',
  Population num format=COMMA10. informat=BEST8. label='Population',
  SquareMiles num format=BEST8. informat=BEST8. label='SquareMiles',
  Density num format=6.2
);
```

In this form of the CREATE TABLE statement, assigning an alias to a column renames the column, while assigning a label does not. In this example, the Area column has been renamed to SquareMiles, and the calculated column has been named Densities. However, the Name column retains its name, and its display label is **Country**.

---

## Creating Tables Like an Existing Table

To create an empty table that has the same columns and attributes as an existing table or view, use the LIKE clause in the CREATE TABLE statement. In the following example, the CREATE TABLE statement creates the NEWCOUNTRIES table with six columns and 0 rows and with the same column attributes as those in COUNTRIES. The DESCRIBE TABLE statement writes a CREATE TABLE statement to the SAS log:

```
proc sql;
  create table sql.newcountries
    like sql.countries;

  describe table sql.newcountries;
```



**Output 4.4** SAS Log for DESCRIBE TABLE Statement for NEWCOUNTRIES

```
NOTE: SQL table SQL.NEWCOUNTRIES was created like:

create table SQL.NEWCOUNTRIES( bufsize=16384 )
(
  Name char(35) format=$35. informat=$35.,
  Capital char(35) format=$35. informat=$35. label='Capital',
  Population num format=BEST8. informat=BEST8. label='Population',
  Area num format=BEST8. informat=BEST8.,
  Continent char(35) format=$35. informat=$35. label='Continent',
  UNDate num format=YEAR4.
);
```

---

## Copying an Existing Table

A quick way to copy a table using PROC SQL is to use the CREATE TABLE statement with a query that returns an entire table. This example creates COUNTRIES1, which contains a copy of all the columns and rows that are in COUNTRIES:

```
create table countries1 as
  select * from sql.countries;
```

---

## Using Data Set Options

You can use SAS data set options in the CREATE TABLE statement. The following CREATE TABLE statement creates COUNTRIES2 from COUNTRIES. The DROP= option deletes the UNDate column, and UNDate does not become part of COUNTRIES2:

```
create table countries2 as
  select * from sql.countries(drop=UNDate);
```

---

## Inserting Rows into Tables

Use the INSERT statement to insert data values into tables. The INSERT statement first adds a new row to an existing table, and then inserts the values that you specify into the row. You specify values by using a SET clause or VALUES clause. You can also insert the rows resulting from a query.

Under most conditions, you can insert data into tables through PROC SQL and SAS/ACCESS views. See “Updating a View” on page 107.

---

## Inserting Rows with the SET Clause

With the SET clause, you assign values to columns by name. The columns can appear in any order in the SET clause. The following INSERT statement uses multiple SET clauses to add two rows to NEWCOUNTRIES:

```
proc sql;
  insert into sql.newcountries
```

```

set name='Bangladesh',
    capital='Dhaka',
    population=126391060
set name='Japan',
    capital='Tokyo',
    population=126352003;

title "World's Largest Countries";
select name format=$20.,
       capital format=$15.,
       population format=comma15.0
from sql.newcountries;

```

**Output 4.5** Rows Inserted with the SET Clause

World's Largest Countries		
Name	Capital	Population
Brazil	Brasilia	160,310,357
China	Beijing	1,202,215,077
India	New Delhi	929,009,120
Indonesia	Jakarta	202,393,859
Russia	Moscow	151,089,979
United States	Washington	263,294,808
Bangladesh	Dhaka	126,391,060
Japan	Tokyo	126,352,003

Note the following features of SET clauses:

- As with other SQL clauses, use commas to separate columns. In addition, you must use a semicolon after the last SET clause only.
- If you omit data for a column, then the value in that column is a missing value.
- To specify that a value is missing, use a blank in single quotation marks for character values and a period for numeric values.

## Inserting Rows with the VALUES Clause

With the VALUES clause, you assign values to a column by position. The following INSERT statement uses multiple VALUES clauses to add rows to NEWCOUNTRIES. Recall that NEWCOUNTRIES has six columns, so it is necessary to specify a value or an appropriate missing value for all six columns. See the results of the DESCRIBE TABLE statement in “Creating Tables Like an Existing Table” on page 92 for information about the columns of NEWCOUNTRIES.

```

proc sql;
  insert into sql.newcountries
    values ('Pakistan', 'Islamabad', 123060000, ., ' ', .)
    values ('Nigeria', 'Lagos', 99062000, ., ' ', .);
  title "World's Largest Countries";
  select name format=$20.,
         capital format=$15.,
         population format=comma15.0
  from sql.newcountries;

```

**Output 4.6** Rows Inserted with the Values Clause

World's Largest Countries		
Name	Capital	Population
Brazil	Brasilia	160,310,357
China	Beijing	1,202,215,077
India	New Delhi	929,009,120
Indonesia	Jakarta	202,393,859
Russia	Moscow	151,089,979
United States	Washington	263,294,808
Pakistan	Islamabad	123,060,000
Nigeria	Lagos	99,062,000

Note the following features of VALUES clauses:

- As with other SQL clauses, use commas to separate columns. In addition, you must use a semicolon after the last VALUES clause only.
- If you omit data for a column without indicating a missing value, then you receive an error message and the row is not inserted.
- To specify that a value is missing, use a space in single quotation marks for character values and a period for numeric values.

---

## Inserting Rows with a Query

You can insert the rows from a query result into a table. The following query returns rows for large countries (over 130 million in population) from the COUNTRIES table. The INSERT statement adds the data to the empty table NEWCOUNTRIES, which was created earlier in “Creating Tables Like an Existing Table” on page 92:

```
proc sql;
  create table sql.newcountries
    like sql.countries;

proc sql;
  title "World's Largest Countries";
  insert into sql.newcountries
  select * from sql.countries
    where population ge 130000000;

  select name format=$20.,
         capital format=$15.,
         population format=comma15.0
  from sql.newcountries;
```

**Output 4.7** Rows Inserted with a Query

World's Largest Countries		
Name	Capital	Population
Brazil	Brasilia	160,310,357
China	Beijing	1,202,215,077
India	New Delhi	929,009,120
Indonesia	Jakarta	202,393,859
Russia	Moscow	151,089,979
United States	Washington	263,294,808

If your query does not return data for every column, then you receive an error message, and the row is not inserted. For more information about how PROC SQL handles errors during data insertions, see “Handling Update Errors” on page 98.

---

## Updating Data Values in a Table

You can use the UPDATE statement to modify data values in tables and in the tables that underlie PROC SQL and SAS/ACCESS views. For more information about updating views, see “Updating a View” on page 107. The UPDATE statement updates data in existing columns; it does not create new columns. To add new columns, see “Altering Columns” on page 99 and “Creating New Columns” on page 18. The examples in this section update the original NEWCOUNTRIES table.

---

### Updating All Rows in a Column with the Same Expression

The following UPDATE statement increases all populations in the NEWCOUNTRIES table by five percent:

```
proc sql;
  update sql.newcountries
    set population=population*1.05;
  title "Updated Population Values";
  select name format=$20.,
         capital format=$15.,
         population format=comma15.0
  from sql.newcountries;
```

**Output 4.8** Updating a Column for All Rows

Updated Population Values		
Name	Capital	Population
Brazil	Brasilia	168,325,875
China	Beijing	1,262,325,831
India	New Delhi	975,459,576
Indonesia	Jakarta	212,513,552
Russia	Moscow	158,644,478
United States	Washington	276,459,548

## Updating Rows in a Column with Different Expressions

If you want to update some, but not all, of a column's values, then use a WHERE expression in the UPDATE statement. You can use multiple UPDATE statements, each with a different expression. However, each UPDATE statement can have only one WHERE clause. The following UPDATE statements result in different population increases for different countries in the NEWCOUNTRIES table.

```
proc sql;
  update sql.newcountries
    set population=population*1.05
    where name like 'B%';

  update sql.newcountries
    set population=population*1.07
    where name in ('China', 'Russia');

  title "Selectively Updated Population Values";
  select name format=$20.,
         capital format=$15.,
         population format=comma15.0
  from sql.newcountries;
```

**Output 4.9** Selectively Updating a Column

Selectively Updated Population Values		
Name	Capital	Population
Brazil	Brasilia	168,325,875
China	Beijing	1,286,370,132
India	New Delhi	929,009,120
Indonesia	Jakarta	202,393,859
Russia	Moscow	161,666,278
United States	Washington	263,294,808

You can accomplish the same result with a CASE expression:

```
update sql.newcountries
  set population=population*
```

```

case when name like 'B%' then 1.05
      when name in ('China', 'Russia') then 1.07
      else 1
end;

```

If the WHEN clause is true, then the corresponding THEN clause returns a value that the SET clause then uses to complete its expression. In this example, when Name starts with the letter *B*, the SET expression becomes **population=population\*1.05**.

**CAUTION:**

**Make sure that you specify the ELSE clause.** If you omit the ELSE clause, then each row that is not described in one of the WHEN clauses receives a missing value for the column that you are updating. This happens because the CASE expression supplies a missing value to the SET clause, and the Population column is multiplied by a missing value, which produces a missing value.  $\Delta$

## Handling Update Errors

While you are updating or inserting rows in a table, you might receive an error message that the update or insert cannot be performed. By using the UNDO\_POLICY= option, you can control whether the changes that have already been made will be permanent.

The UNDO\_POLICY= option in the PROC SQL and RESET statements determines how PROC SQL handles the rows that have been inserted or updated by the current INSERT or UPDATE statement up to the point of error.

UNDO\_POLICY=REQUIRED

is the default. It undoes all updates or inserts up to the point of error.

UNDO\_POLICY=NONE

does not undo any updates or inserts.

UNDO\_POLICY=OPTIONAL

undoes any updates or inserts that it can undo reliably.

*Note:* Alternatively, you can set the SQLUNDOPOLICY system option. For more information, see the SQLUNDOPOLICY system option in *SAS Language Reference: Dictionary*.  $\Delta$

## Deleting Rows

The DELETE statement deletes one or more rows in a table or in a table that underlies a PROC SQL or SAS/ACCESS view. For more information about deleting rows from views, see “Updating a View” on page 107. The following DELETE statement deletes the names of countries that begin with the letter *R*:

```

proc sql;
  delete
    from sql.newcountries
    where name like 'R%';

```

A note in the SAS log tells you how many rows were deleted.

**Output 4.10** SAS Log for DELETE statement

```
NOTE: 1 row was deleted from SQL.NEWCOUNTRIES.
```

*Note:* For PROC SQL tables, SAS deletes the data in the rows but retains the space in the table. △

**CAUTION:**

If you use the DELETE statement without a WHERE clause, then all rows are deleted. △

---

## Altering Columns

The ALTER TABLE statement adds, modifies, and deletes columns in existing tables. You can use the ALTER TABLE statement with tables only; it does not work with views. A note appears in the SAS log that describes how you have modified the table.

---

### Adding a Column

The ADD clause adds a new column to an existing table. You must specify the column name and data type. You can also specify a length (LENGTH=), format (FORMAT=), informat (INFORMAT=), and a label (LABEL=). The following ALTER TABLE statement adds the numeric data column Density to the NEWCOUNTRIES table:

```
proc sql;
  alter table sql.newcountries
    add density num label='Population Density' format=6.2;

  title "Population Density Table";
  select name format=$20.,
         capital format=$15.,
         population format=comma15.0,
         density
  from sql.newcountries;
```

**Output 4.11** Adding a New Column

Population Density Table			
Name	Capital	Population	Population Density
Brazil	Brasilia	160,310,357	.
China	Beijing	1,202,215,077	.
India	New Delhi	929,009,120	.
Indonesia	Jakarta	202,393,859	.
Russia	Moscow	151,089,979	.
United States	Washington	263,294,808	.

The new column is added to NEWCOUNTRIES, but it has no data values. The following UPDATE statement changes the missing values for Density from missing to the appropriate population densities for each country:

```
proc sql;
  update sql.newcountries
     set density=population/area;

  title "Population Density Table";
  select name format=$20.,
         capital format=$15.,
         population format=comma15.0,
         density
  from sql.newcountries;
```

**Output 4.12** Filling in the New Column's Values

Population Density Table			
Name	Capital	Population	Population Density
Brazil	Brasilia	160,310,357	48.78
China	Beijing	1,202,215,077	325.27
India	New Delhi	929,009,120	759.86
Indonesia	Jakarta	202,393,859	273.10
Russia	Moscow	151,089,979	22.92
United States	Washington	263,294,808	69.52

For more information about how to change data values, see “Updating Data Values in a Table” on page 96.

You can accomplish the same update by using an arithmetic expression to create the Population Density column as you recreate the table:

```
proc sql;
  create table sql.newcountries as
  select *, population/area as density
         label='Population Density'
         format=6.2
  from sql.newcountries;
```

See “Calculating Values” on page 19 for another example of creating columns with arithmetic expressions.

---

## Modifying a Column

You can use the MODIFY clause to change the width, informat, format, and label of a column. To change a column's name, use the RENAME= data set option. You cannot change a column's data type by using the MODIFY clause.

The following MODIFY clause permanently changes the format for the Population column:

```
proc sql;
  title "World's Largest Countries";
  alter table sql.newcountries
```



```

modify population format=comma15.;
select name, population from sql.newcountries;

```

**Output 4.13** Modifying a Column Format

World's Largest Countries	
Name	Population
Brazil	160,310,357
China	1,202,215,077
India	929,009,120
Indonesia	202,393,859
Russia	151,089,979
United States	263,294,808

You might have to change a column's width (and format) before you can update the column. For example, before you can prefix a long text string to Name, you must change the width and format of Name from 35 to 60. The following statements modify and update the Name column:

```

proc sql;
  title "World's Largest Countries";
  alter table sql.newcountries
    modify name char(60) format=$60.;
  update sql.newcountries
    set name='The United Nations member country is '||name;

  select name from sql.newcountries;

```

**Output 4.14** Changing a Column's Width

World's Largest Countries	
Name	
The United Nations member country is Brazil	
The United Nations member country is China	
The United Nations member country is India	
The United Nations member country is Indonesia	
The United Nations member country is Russia	
The United Nations member country is United States	

---

## Deleting a Column

The DROP clause deletes columns from tables. The following DROP clause deletes UNDate from NEWCOUNTRIES:

```

proc sql;
  alter table sql.newcountries
    drop undate;

```

---

## Creating an Index

An *index* is a file that is associated with a table. The index enables access to rows by index value. Indexes can provide quick access to small subsets of data, and they can enhance table joins. You can create indexes, but you cannot instruct PROC SQL to use an index. PROC SQL determines whether it is efficient to use the index.

Some columns might not be appropriate for an index. In general, create indexes for columns that have many unique values or are columns that you use regularly in joins.

---

### Using PROC SQL to Create Indexes

You can create a simple index, which applies to one column only. The name of a simple index must be the same as the name of the column that it indexes. Specify the column name in parentheses after the table name. The following CREATE INDEX statement creates an index for the Area column in NEWCOUNTRIES:

```
proc sql;
  create index area
    on sql.newcountries(area);
```

You can also create a composite index, which applies to two or more columns. The following CREATE INDEX statement creates the index Places for the Name and Continent columns in NEWCOUNTRIES:

```
proc sql;
  create index places
    on sql.newcountries(name, continent);
```

To ensure that each value of the indexed column (or each combination of values of the columns in a composite index) is unique, use the UNIQUE keyword:

```
proc sql;
  create unique index places
    on sql.newcountries(name, continent);
```

Using the UNIQUE keyword causes SAS to reject any change to a table that would cause more than one row to have the same index value.

---

### Tips for Creating Indexes

- The name of the composite index cannot be the same as the name of one of the columns in the table.
- If you use two columns to access data regularly, such as a first name column and a last name column from an employee database, then you should create a composite index for the columns.
- Keep the number of indexes to a minimum to reduce disk space and update costs.
- Use indexes for queries that retrieve a relatively small number of rows (less than 15%).
- In general, indexing a small table does not result in a performance gain.
- In general, indexing on a column with a small number (less than 6 or 7) of distinct values does not result in a performance gain.

- You can use the same column in a simple index and in a composite index. However, for tables that have a primary key integrity constraint, do not create more than one index that is based on the same column as the primary key.

---

## Deleting Indexes

To delete an index from a table, use the DROP INDEX statement. The following DROP INDEX statement deletes the index Places from NEWCOUNTRIES:

```
proc sql;
  drop index places from sql.newcountries;
```

---

## Deleting a Table

To delete a PROC SQL table, use the DROP TABLE statement:

```
proc sql;
  drop table sql.newcountries;
```

---

## Using SQL Procedure Tables in SAS Software

Because PROC SQL tables are SAS data files, you can use them as input to a DATA step or to other SAS procedures. For example, the following PROC MEANS step calculates the mean for Area for all countries in COUNTRIES:

```
proc means data=sql.countries mean maxdec=2;
  title "Mean Area for All Countries";
  var area;
run;
```

**Output 4.15** Using a PROC SQL Table in PROC MEANS

Mean Area for All Countries		
The MEANS Procedure		
Analysis Variable : Area		
<table style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th style="text-align: center;">Mean</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">----- 250249.01 -----</td> </tr> </tbody> </table>	Mean	----- 250249.01 -----
Mean		
----- 250249.01 -----		

---

## Creating and Using Integrity Constraints in a Table

Integrity constraints are rules that you specify to guarantee the accuracy, completeness, or consistency of data in tables. All integrity constraints are enforced when you insert, delete, or alter data values in the columns of a table for which integrity

constraints have been defined. Before a constraint is added to a table that contains existing data, all the data is checked to determine that it satisfies the constraints.

You can use *general* integrity constraints to verify that data in a column is

- nonmissing
- unique
- both nonmissing and unique
- within a specified set or range of values.

You can also apply *referential* integrity constraints to link the values in a specified column (called a *primary key*) of one table to values of a specified column in another table. When linked to a primary key, a column in the second table is called a *foreign key*.

When you define referential constraints, you can also choose what action occurs when a value in the primary key is updated or deleted.

- You can prevent the primary key value from being updated or deleted when matching values exist in the foreign key. This is the default.
- You can allow updates and deletions to the primary key values. By default, any affected foreign key values are changed to missing values. However, you can specify the CASCADE option to update foreign key values instead. Currently, the CASCADE option does not apply to deletions.

You can choose separate actions for updates and for deletions.

*Note:* Integrity constraints cannot be defined for views.  $\Delta$

The following example creates integrity constraints for a table, MYSTATES, and another table, USPOSTAL. The constraints are as follows:

- state name must be unique and nonmissing in both tables
- population must be greater than 0
- continent must be either North America or Oceania.

```
proc sql;
  create table sql.mystates
    (state      char(15),
     population num,
     continent  char(15),

     /* constraint specifications */
     constraint prim_key    primary key(state),
     constraint population  check(population gt 0),
     constraint continent   check(continent in ('North America', 'Oceania')));

  create table sql.uspostal
    (name      char(15),
     code      char(2) not null,          /* constraint specified as */
                                           /* a column attribute */
     constraint for_key foreign key(name) /* links NAME to the */
     references sql.mystates /* primary key in MYSTATES */

     on delete restrict /* forbids deletions to STATE */
     /* unless there is no */
     /* matching NAME value */

     on update set null); /* allows updates to STATE, */
```

```
/* changes matching NAME */
/* values to missing */
```

The DESCRIBE TABLE statement displays the integrity constraints in the SAS log as part of the table description. The DESCRIBE TABLE CONSTRAINTS statement writes only the constraint specifications to the SAS log.

```
proc sql;
  describe table sql.mystates;
  describe table constraints sql.uspostal;
```

**Output 4.16** SAS Log Showing Integrity Constraints

```
NOTE: SQL table SQL.MYSTATES was created like:
create table SQL.MYSTATES( bufsize=8192 )
(
  state char(15),
  population num,
  continent char(15)
);
create unique index state on SQL.MYSTATES(state);

-----Alphabetic List of Integrity Constraints-----

Integrity          Where          On          On
# Constraint Type    Variables Clause Reference Delete Update
-----
-49 continent Check          continent in
              ('North
              America',
              'Oceania')
-48 population Check          population>0
-47 prim_key Primary Key state
for_key Referential name          SQL. Restrict Set Null
              USPOSTAL
NOTE: SQL table SQL.USPOSTAL ( bufsize=8192 ) has the following integrity
constraints:

-----Alphabetic List of Integrity Constraints-----

Integrity          On          On
# Constraint Type    Variables Reference Delete Update
-----
1  _NM0001_ Not Null code
2  for_key Foreign Key name          SQL.MYSTATES Restrict Set Null
```

Integrity constraints cannot be used in views. For more information about integrity constraints, see *SAS Language Reference: Concepts*.

## Creating and Using PROC SQL Views

A PROC SQL view contains a stored query that is executed when you use the view in a SAS procedure or DATA step. Views are useful because they

- often save space, because a view is frequently quite small compared with the data that it accesses.
- prevent users from continually submitting queries to omit unwanted columns or rows.
- shield sensitive or confidential columns from users while enabling the same users to view other columns in the same table.
- ensure that input data sets are always current, because data is derived from tables at execution time.
- hide complex joins or queries from users.

### Creating Views

To create a PROC SQL view, use the CREATE VIEW statement, as shown in the following example:

```
proc sql;
  title 'Current Population Information for Continents';
  create view sql.newcontinents as
  select continent,
         sum(population) as totpop format=comma15. label='Total Population',
         sum(area) as totarea format=comma15. label='Total Area'
  from sql.countries
  group by continent;

  select * from sql.newcontinents;
```

**Output 4.17** An SQL Procedure View

Current Population Information for Continents		
Continent	Total Population	Total Area
	384,772	876,800
Africa	710,529,592	11,299,595
Asia	3,381,858,879	12,198,325
Australia	18,255,944	2,966,200
Central America and Caribbean	66,815,930	291,463
Europe	813,335,288	9,167,084
North America	384,801,818	8,393,092
Oceania	5,342,368	129,600
South America	317,568,801	6,885,418

*Note:* In this example, each column has a name. If you are planning to use a view in a procedure that requires variable names, then you must supply column aliases that you can reference as variable names in other procedures. For more information, see “Using SQL Procedure Views in SAS Software” on page 110.  $\Delta$

---

## Describing a View

The DESCRIBE VIEW statement writes a description of the PROC SQL view to the SAS log. The following SAS log describes the view NEWCONTINENTS, which is created in “Creating Views” on page 106:

```
proc sql;
  describe view sql.newcontinents;
```

### Output 4.18 SAS Log from DESCRIBE VIEW Statement

```
NOTE: SQL view SQL.NEWCONTINENTS is defined as:

      select continent, SUM(population) as totpop label='Total Population'
      format=COMMA15.0, SUM(area) as totarea label='Total Area' format=COMMA15.0
      from SQL.COUNTRIES
      group by continent;
```

---

## Updating a View

You can update data through a PROC SQL and SAS/ACCESS view with the INSERT, DELETE, and UPDATE statements, under the following conditions.

- You can update only a single table through a view. The underlying table cannot be joined to another table or linked to another table with a set operator. The view cannot contain a subquery.
- If the view accesses a DBMS table, then you must have been granted the appropriate authorization by the external database management system (for example, ORACLE). You must have installed the SAS/ACCESS software for your DBMS. See the SAS/ACCESS documentation for your DBMS for more information about SAS/ACCESS views.
- You can update a column in a view by using the column’s alias, but you cannot update a derived column, that is, a column that is produced by an expression. In the following example, you can update SquareMiles, but not Density:

```
proc sql;
  create view mycountries as
  select Name,
         area as SquareMiles,
         population/area as Density
  from sql.countries;
```

- You can update a view that contains a WHERE clause. The WHERE clause can be in the UPDATE clause or in the view. You cannot update a view that contains any other clause, such as ORDER BY, HAVING, and so on.

---

## Embedding a LIBNAME in a View

You can embed a SAS LIBNAME statement or a SAS/ACCESS LIBNAME statement in a view by using the USING LIBNAME clause. When PROC SQL executes the view, the stored query assigns the libref. For SAS/ACCESS librefs, PROC SQL establishes a connection to a DBMS. The scope of the libref is local to the view and does not conflict

with any identically named librefs in the SAS session. When the query finishes, the libref is disassociated. The connection to the DBMS is terminated and all data in the library becomes unavailable.

The advantage of embedded librefs is that you can store engine-host options and DBMS connection information, such as passwords, in the view. That, in turn, means that you do not have to remember and reenter that information when you want to use the libref.

*Note:* The USING LIBNAME clause must be the last clause in the SELECT statement. Multiple clauses can be specified, separated by commas.  $\triangle$

In the following example, the libref OILINFO is assigned and a connection is made to an ORACLE database:

```
proc sql;
  create view sql.view1 as
  select *
  from oilinfo.reserves as newreserves
  using libname oilinfo oracle
  user=username
  pass=password
  path='dbms-path';
```

For more information about the SAS/ACCESS LIBNAME statement, see the SAS/ACCESS documentation for your DBMS.

The following example embeds a SAS LIBNAME statement in a view:

```
proc sql;
  create view sql.view2 as
  select *
  from oil.reserves
  using libname oil 'SAS-data-library';
```

---

## Deleting a View

To delete a view, use the DROP VIEW statement:

```
proc sql;
  drop view sql.newcontinents;
```

---

## Specifying In-Line Views

In some cases, you might want to use a query in a FROM clause instead of a table or view. You could create a view and refer to it in your FROM clause, but that process involves two steps. To save the extra step, specify the view in-line, enclosed in parentheses, in the FROM clause.

An *in-line view* is a query that appears in the FROM clause. An in-line view produces a table internally that the outer query uses to select data. Unlike views that are created with the CREATE VIEW statement, in-line views are not assigned names and cannot be referenced in other queries or SAS procedures as if they were tables. An in-line view can be referenced only in the query in which it is defined.

In the following query, the populations of all Caribbean and Central American countries are summed in an in-line query. The WHERE clause compares the sum with the populations of individual countries. Only countries that have a population greater than the sum of Caribbean and Central American populations are displayed.



```

proc sql;
  title 'Countries With Population GT Caribbean Countries';
  select w.Name, w.Population format=comma15., c.TotCarib
    from (select sum(population) as TotCarib format=comma15.
          from sql.countries
          where continent = 'Central America and Caribbean') as c,
         sql.countries as w
  where w.population gt c.TotCarib;

```

**Output 4.19** Using an In-Line View

Countries With Population GT Caribbean Countries		
Name	Population	TotCarib
Bangladesh	126,387,850	66,815,930
Brazil	160,310,357	66,815,930
China	1,202,215,077	66,815,930
Germany	81,890,690	66,815,930
India	929,009,120	66,815,930
Indonesia	202,393,859	66,815,930
Japan	126,345,434	66,815,930
Mexico	93,114,708	66,815,930
Nigeria	99,062,003	66,815,930
Pakistan	123,062,252	66,815,930
Philippines	70,500,039	66,815,930
Russia	151,089,979	66,815,930
United States	263,294,808	66,815,930
Vietnam	73,827,657	66,815,930


## Tips for Using SQL Procedure Views

- Avoid using an ORDER BY clause in a view. If you specify an ORDER BY clause, then the data must be sorted each time that the view is referenced.
- If data is used many times in one program or in multiple programs, then it is more efficient to create a table rather than a view. If a view is referenced often in one program, then the data must be accessed at each reference.
- If the view resides in the same SAS library as the contributing table or tables, then specify a one-level name in the FROM clause. The default for the libref for the FROM clause's table or tables is the libref of the library that contains the view. This prevents you from having to change the view if you assign a different libref to the SAS library that contains the view and its contributing table or tables. This tip is used in the view that is described in "Creating Views" on page 106.
- Avoid creating views that are based on tables whose structure might change. A view is no longer valid when it references a nonexistent column.
- When you process PROC SQL views between a client and a server, getting the correct results depends on the compatibility between the client and server architecture. For more information, see "Accessing a SAS View" in the *SAS/CONNECT User's Guide*.

---

## Using SQL Procedure Views in SAS Software

You can use PROC SQL views as input to a DATA step or to other SAS procedures. The syntax for using a PROC SQL view in SAS is the same as that for a PROC SQL table. For an example, see “Using SQL Procedure Tables in SAS Software” on page 103.

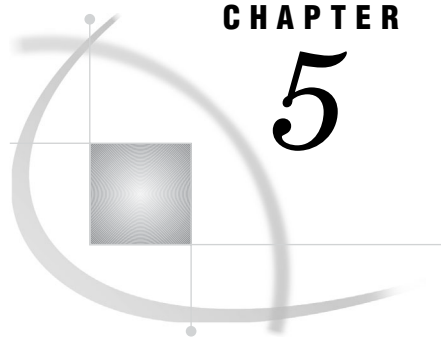

## CHAPTER

## 5

# Programming with the SQL Procedure

<i>Introduction</i>	112
<i>Using PROC SQL Options to Create and Debug Queries</i>	112
<i>Restricting Row Processing with the INOBS= and OUTOBS= Options</i>	112
<i>Limiting Iterations with the LOOPS= Option</i>	113
<i>Checking Syntax with the NOEXEC Option and the VALIDATE Statement</i>	113
<i>Expanding SELECT * with the FEEDBACK Option</i>	113
<i>Timing PROC SQL with the STIMER Option</i>	114
<i>Resetting PROC SQL Options with the RESET Statement</i>	115
<i>Improving Query Performance</i>	116
<i>Using Indexes to Improve Performance</i>	116
<i>Using the Keyword ALL in Set Operations</i>	117
<i>Omitting the ORDER BY Clause When Creating Tables and Views</i>	117
<i>Using In-Line Views versus Temporary Tables</i>	117
<i>Comparing Subqueries with Joins</i>	117
<i>Using WHERE Expressions with Joins</i>	117
<i>Optimizing the PUT Function</i>	118
<i>Reducing the PUT Function</i>	118
<i>Deploying the PUT Function and SAS Formats inside Teradata</i>	119
<i>Replacing References to the DATE, TIME, DATETIME, and TODAY Functions</i>	119
<i>Disabling the Remerging of Data When Using Summary Functions</i>	120
<i>Accessing SAS System Information by Using DICTIONARY Tables</i>	120
<i>What Are Dictionary Tables?</i>	120
<i>Retrieving Information about DICTIONARY Tables and SASHELP Views</i>	122
<i>Using DICTIONARY.TABLES</i>	124
<i>Using DICTIONARY.COLUMNS</i>	125
<i>DICTIONARY Tables and Performance</i>	126
<i>Using SAS Data Set Options with PROC SQL</i>	127
<i>Using PROC SQL with the SAS Macro Facility</i>	128
<i>Creating Macro Variables in PROC SQL</i>	128
<i>Creating Macro Variables from the First Row of a Query Result</i>	128
<i>Creating a Macro Variable from the Result of an Aggregate Function</i>	129
<i>Creating Multiple Macro Variables</i>	129
<i>Concatenating Values in Macro Variables</i>	130
<i>Defining Macros to Create Tables</i>	131
<i>Using the PROC SQL Automatic Macro Variables</i>	133
<i>Formatting PROC SQL Output by Using the REPORT Procedure</i>	136
<i>Accessing a DBMS with SAS/ACCESS Software</i>	137
<i>Connecting to a DBMS by Using the LIBNAME Statement</i>	138
<i>Querying a DBMS Table</i>	138
<i>Creating a PROC SQL View of a DBMS Table</i>	139
<i>Connecting to a DBMS by Using the SQL Procedure Pass-Through Facility</i>	140

<i>What Is the Pass-Through Facility?</i>	140
<i>Return Codes</i>	141
<i>Pass-Through Example</i>	141
<i>Updating PROC SQL and SAS/ACCESS Views</i>	142
<i>Using the Output Delivery System with PROC SQL</i>	142

---

## Introduction

This section shows you how to do the following:

- use PROC SQL options to create and debug queries
- improve query performance
- explain dictionary tables and how they are useful in gathering information about the elements of SAS
- use PROC SQL with the SAS macro facility
- use PROC SQL with the REPORT procedure
- access DBMSs by using SAS/ACCESS software
- format PROC SQL output by using the SAS Output Delivery System (ODS).

---

## Using PROC SQL Options to Create and Debug Queries

PROC SQL supports options that can give you greater control over PROC SQL while you are developing a query:

- The INOBS=, OUTOBS=, and LOOPS= options reduce query execution time by limiting the number of rows and the number of iterations that PROC SQL processes.
- The EXEC and VALIDATE statements enable you to quickly check the syntax of a query.
- The FEEDBACK option displays the columns that are represented by a SELECT \* statement.
- The PROC SQL STIMER option records and displays query execution time.

You can set an option initially in the PROC SQL statement, and then use the RESET statement to change the same option's setting without ending the current PROC SQL step.

---

### Restricting Row Processing with the INOBS= and OUTOBS= Options

When you are developing queries against large tables, you can reduce the time that it takes for the queries to run by reducing the number of rows that PROC SQL processes. Subsetting the tables with WHERE statements is one way to do this. Using the INOBS= and the OUTOBS= options are other ways.

The INOBS= option restricts the number of rows that PROC SQL takes as input from any single source. For example, if you specify INOBS=10, then PROC SQL uses only 10 rows from any table or view that is specified in a FROM clause. If you specify INOBS=10 and join two tables without using a WHERE clause, then the resulting table (Cartesian product) contains a maximum of 100 rows. The INOBS= option is similar to the SAS system option OBS=.

The OUTOBS= option restricts the number of rows that PROC SQL displays or writes to a table. For example, if you specify OUTOBS=10 and insert values into a

table by using a query, then PROC SQL inserts a maximum of 10 rows into the resulting table. OUTOBS= is similar to the SAS data set option OBS=.

In a simple query, there might be no apparent difference between using INOBS or OUTOBS. However, at other times it is important to choose the correct option. For example, taking the average of a column with INOBS=10 returns an average of only 10 values from that column.

---

## Limiting Iterations with the LOOPS= Option

The LOOPS= option restricts PROC SQL to the number of iterations that are specified in this option through its inner loop. By setting a limit, you can prevent queries from consuming excessive computer resources. For example, joining three large tables without meeting the join-matching conditions could create a huge internal table that would be inefficient to process. Use the LOOPS= option to prevent this from happening.

You can use the number of iterations that are reported in the SQLLOOPS macro variable (after each PROC SQL statement is executed) to gauge an appropriate value for the LOOPS= option. For more information, see “Using the PROC SQL Automatic Macro Variables” on page 133.

If you use the PROMPT option with the INOBS=, OUTOBS=, or LOOPS= options, you are prompted to stop or continue processing when the limits set by these options are reached.

---

## Checking Syntax with the NOEXEC Option and the VALIDATE Statement

To check the syntax of a PROC SQL step without actually executing it, use the NOEXEC option or the VALIDATE statement. The NOEXEC option can be used once in the PROC SQL statement, and the syntax of all queries in that PROC SQL step will be checked for accuracy without executing them. The VALIDATE statement must be specified before each SELECT statement in order for that statement to be checked for accuracy without executing. If the syntax is valid, then a message is written to the SAS log to that effect; if the syntax is invalid, then an error message is displayed. The automatic macro variable SQLRC contains an error code that indicates the validity of the syntax. For an example of the VALIDATE statement used in PROC SQL, see “Validating a Query” on page 53. For an example of using the VALIDATE statement in a SAS/AF application, see “Using the PROC SQL Automatic Macro Variables” on page 133.

*Note:* There is an interaction between the PROC SQL EXEC and ERRORSTOP options when SAS is running in a batch or noninteractive session. For more information, see the section about PROC SQL in the *Base SAS Procedures Guide*.  $\Delta$

---

## Expanding SELECT \* with the FEEDBACK Option

The FEEDBACK option expands a SELECT \* (ALL) statement into the list of columns that the statement represents. Any PROC SQL view is expanded into the underlying query, and all expressions are enclosed in parentheses to indicate their order of evaluation. The FEEDBACK option also displays the resolved values of macros and macro variables.

For example, the following query is expanded in the SAS log:

```
proc sql feedback;
  select * from sql.countries;
```

**Output 5.1** Expanded SELECT \* Statement

```
NOTE: Statement transforms to:

      select COUNTRIES.Name, COUNTRIES.Capital, COUNTRIES.Population,
      COUNTRIES.Area, COUNTRIES.Continent, COUNTRIES.UNDate
      from SQL.COUNTRIES;
```

**Timing PROC SQL with the STIMER Option**

Certain operations can be accomplished in more than one way. For example, there is often a join equivalent to a subquery. Consider factors such as readability and maintenance, but generally you will choose the query that runs fastest. The SAS system option *STIMER* shows you the cumulative time for an entire procedure. The PROC SQL *STIMER* option shows you how fast the individual statements in a PROC SQL step are running. This enables you to optimize your query.

*Note:* For the PROC SQL *STIMER* option to work, the SAS system option *STIMER* must also be specified.  $\triangle$

This example compares the execution times of two queries. Both queries list the names and populations of states in the *UNITEDSTATES* table that have a larger population than Belgium. The first query does this with a join; the second with a subquery. Output 5.2 shows the *STIMER* results from the SAS log.

```
proc sql stimer ;
  select us.name, us.population
     from sql.unitedstates as us, sql.countries as w
     where us.population gt w.population and
           w.name = 'Belgium';

  select Name, population
     from sql.unitedstates
     where population gt
           (select population from sql.countries
            where name = 'Belgium');
```

**Output 5.2** Comparing Run Times of Two Queries

```

4  proc sql stimer ;
NOTE: SQL Statement used:
      real time          0.00 seconds
      cpu time           0.01 seconds

5  select us.name, us.population
6      from sql.unitedstates as us, sql.countries as w
7      where us.population gt w.population and
8            w.name = 'Belgium';
NOTE: The execution of this query involves performing one or more Cartesian
      product joins that can not be optimized.
NOTE: SQL Statement used:
      real time          0.10 seconds
      cpu time           0.05 seconds

9
10 select Name, population
11     from sql.unitedstates
12     where population gt
13         (select population from sql.countries
14          where name = 'Belgium');
NOTE: SQL Statement used:
      real time          0.09 seconds
      cpu time           0.09 seconds

```

Compare the CPU time of the first query (that uses a join), 0.05 seconds, with 0.09 seconds for the second query (that uses a subquery). Although there are many factors that influence the run times of queries, generally a join runs faster than an equivalent subquery.

---

## Resetting PROC SQL Options with the RESET Statement

Use the RESET statement to add, drop, or change the options in the PROC SQL statement. You can list the options in any order in the PROC SQL and RESET statements. Options stay in effect until they are reset.

This example first uses the NOPRINT option to prevent the SELECT statement from displaying its result table in SAS output. The RESET statement then changes the NOPRINT option to PRINT (the default) and adds the NUMBER option, which displays the row number in the result table.

```

proc sql noprint;
    title 'Countries with Population Under 20,000';
    select Name, Population from sql.countries;
reset print number;
    select Name, Population from sql.countries
        where population lt 20000;

```

**Output 5.3** Resetting PROC SQL Options with the RESET Statement

Countries with Population Under 20,000		
Row	Name	Population
1	Leeward Islands	12119
2	Nauru	10099
3	Turks and Caicos Islands	12119
4	Tuvalu	10099
5	Vatican City	1010

---

## Improving Query Performance

There are several ways to improve query performance, including the following:

- using indexes and composite indexes
- using the keyword ALL in set operations when you know that there are no duplicate rows, or when it does not matter if you have duplicate rows in the result table
- omitting the ORDER BY clause when you create tables and views
- using in-line views instead of temporary tables (or vice versa)
- using joins instead of subqueries
- using WHERE expressions to limit the size of result tables that are created with joins
- using either PROC SQL options, SAS system options, or both to replace a PUT function in a query with a logically equivalent expression
- replacing references to the DATE, TIME, DATETIME, and TODAY functions in a query with their equivalent constant values before the query executes
- disabling the remerging of data when summary functions are used in a query

---

## Using Indexes to Improve Performance

Indexes are created with the CREATE INDEX statement in PROC SQL or with the MODIFY and INDEX CREATE statements in the DATASETS procedure. Indexes are stored in specialized members of a SAS library and have a SAS member type of INDEX. The values that are stored in an index are automatically updated if you make a change to the underlying data.

Indexes can improve the performance of certain classes of retrievals. For example, if an indexed column is compared to a constant value in a WHERE expression, then the index will likely improve the query's performance. Indexing the column that is specified in a correlated reference to an outer table also improves a subquery's (and hence, query's) performance. Composite indexes can improve the performance of queries that compare the columns that are named in the composite index with constant values that are linked using the AND operator. For example, if you have a compound index in the columns CITY and STATE, and the WHERE expression is specified as WHERE CITY='xxx' AND STATE='yy', then the index can be used to select that subset of rows more efficiently. Indexes can also benefit queries that have a WHERE clause in this form:

```
... where var1 in (select item1 from table1) ...
```



The values of VAR1 from the outer query are found in the inner query by using the index. An index can improve the processing of a table join, if the columns that participate in the join are indexed in one of the tables. This optimization can be done for equijoin queries only—that is, when the WHERE expression specifies that `table1.X=table2.Y`.

---

## Using the Keyword ALL in Set Operations

Set operators such as UNION, OUTER UNION, EXCEPT, and INTERSECT can be used to combine queries. Specifying the optional ALL keyword prevents the final process that eliminates duplicate rows from the result table. You should use the ALL form when you know that there are no duplicate rows or when it does not matter whether the duplicate rows remain in the result table.

---

## Omitting the ORDER BY Clause When Creating Tables and Views

If you specify the ORDER BY clause when a table or view is created, then the data is always displayed in that order unless you specify another ORDER BY clause in a query that references that table or view. As with any sorting procedure, using ORDER BY when retrieving data has certain performance costs, especially on large tables. If the order of your output is not important for your results, then your queries will typically run faster without an ORDER BY clause.

---

## Using In-Line Views versus Temporary Tables

It is often helpful when you are exploring a problem to break a query down into several steps and create temporary tables to hold the intermediate results. After you have worked through the problem, combining the queries into one query by using in-line views can be more efficient. However, under certain circumstances it is more efficient to use temporary tables. You should try both methods to determine which is more efficient for your case.

---

## Comparing Subqueries with Joins

Many subqueries can also be expressed as joins. Generally, a join is processed at least as efficiently as the subquery. PROC SQL stores the result values for each unique set of correlation columns temporarily, thereby eliminating the need to calculate the subquery more than once.

---

## Using WHERE Expressions with Joins

When joining tables, you should specify a WHERE expression. Joins without WHERE expressions are often time-consuming to evaluate because of the multiplier effect of the Cartesian product. For example, joining two tables of 1,000 rows each without specifying a WHERE expression or an ON clause, produces a result table with one million rows.

PROC SQL executes and obtains the correct results in unbalanced WHERE expressions (or ON join expressions) in an equijoin, as shown here, but handles them inefficiently:

```
where table1.columnA=table2.columnB=0
```

It is more efficient to rewrite this clause to balance the expression so that columns from each table are on alternate sides of the equals condition:

```
where table1.columnA=table2.columnB
```

PROC SQL sequentially processes joins that do not have an equijoin condition evaluating each row against the WHERE expression: that is, joins without an equijoin condition are not evaluated using sort-merge or index-lookup techniques. Evaluating left and right outer joins is generally comparable to, or only slightly slower than, a standard inner join. A full outer join usually requires two passes over both tables in the join, although PROC SQL tries to store as much data as possible in buffers. Thus for small tables, an outer join might be processed with only one physical read of the data.

## Optimizing the PUT Function

### Reducing the PUT Function

There are several ways you can improve the performance of queries for formatted data by optimizing the PUT functions. If you reference tables in a database, eliminating references to PUT functions can enable more of the query to be passed down to the database. It can also simplify WHERE clause evaluation for the default Base SAS engine.

- By using either the PROC SQL REDUCEPUT= option or the SQLREDUCEPUT= system option, you can specify that SAS reduces the PUT function as much as possible before the query is processed. If the query also contains a WHERE clause, the evaluation of the WHERE clause is simplified.

The following SELECT statements are examples of queries that would be reduced if you specify that optimization should occur.

```
select x, y from &lib..b where (PUT(x, abc.) in ('yes', 'no'));
select x from &lib..a where (PUT(x, udfmt.) -- trim(left('small')));
```

- For databases that allow implicit pass-through when the row count for a table is not known, PROC SQL allows the optimization in order for the query to be executed by the database. When the PROC SQL REDUCEPUT= option or the SQLREDUCEPUT= system option is set to NONE, PROC SQL considers the value of the PROC SQL REDUCEPUTOBS= option or the SQLREDUCEPUTOBS= system option and determines whether to optimize the PUT function. The PROC SQL REDUCEPUTOBS= option or the SQLREDUCEPUTOBS= system option specifies the minimum number of rows that must be in a table in order for PROC SQL to consider optimizing the PUT function in a query. For databases that do not allow implicit pass-through, PROC SQL does not perform the optimization, and more of the query is performed by SAS.
- Some formats, especially user-defined formats, can contain many format values. Depending on the number of matches for a given PUT function expression, the resulting expression can list many format values. If the number of format values becomes too large, the query performance can degrade. When the PROC SQL REDUCEPUT= option or the SQLREDUCEPUT= system option is set to NONE, PROC SQL considers the value of the PROC SQL REDUCEPUTVALUES= option or the SQLREDUCEPUTVALUES= system option and determines whether to optimize the PUT function in a query. For databases that do not allow implicit pass-through, PROC SQL does not perform the optimization, and more of the query is performed by SAS.

For more information, see the REDUCEPUT=, REDUCEPUTOBS=, and REDCUEPUTVALUES= options in the *Base SAS Procedures Guide*, and the SQLREDUCEPUT=, SQLREDUCEPUTOBS=, and SQLREDUCEPUTVALUES= system options in *SAS Language Reference: Dictionary*.

*Note:* PROC SQL can consider both the REDUCEPUTOBS= and the REDUCEPUTVALUES= options (or SQLREDUCEPUTOBS= and SQLREDUCEPUTVALUES= system options) when trying to determine whether to optimize the PUT function.  $\Delta$

## Deploying the PUT Function and SAS Formats inside Teradata

In SAS 9.2 Phase 2 and later, if you use SAS/ACCESS for Teradata, you can use %INDTD\_PUBLISH\_FORMATS macro to deploy, or *publish*, the PUT function implementation to Teradata as a function named SAS\_PUT( ). As with any other programming function, the SAS\_PUT( ) function can take one or more input parameters and return an output value. After the SAS\_PUT( ) function is deployed in Teradata and the SQLMAPPUTTO system option is set to SAS\_PUT, you can use the SAS\_PUT( ) function as you would use any standard SQL function *inside the database*.

In addition, the SAS\_PUT( ) function supports the use of SAS formats in SQL queries that are submitted to Teradata. You also use the %INDTD\_PUBLISH\_FORMATS macro to publish both the formats that are supplied by SAS and the custom formats that you create with the FORMAT procedure to Teradata.

By publishing the PUT function implementation to Teradata as the SAS\_PUT( ) function to support the use of SAS formats, and by packaging both the formats that are supplied by SAS and the custom formats that are defined using the FORMAT procedure, the following advantages are realized:

- The entire SQL query can be processed inside the database.
- The SAS format processing leverages the DBMS's scalable architecture.
- The results are grouped by the formatted data and are extracted from the Teradata database.

*Note:* Using both the SQLREDUCEPUT system option (or the PROC SQL REDUCEPUT= option) and the SAS\_PUT( ) function can result in a significant performance boost.  $\Delta$

For more information about using the %INDTD\_PUBLISH\_FORMATS macro and the SQLMAPPUTTO system option, see *SAS/ACCESS for Relational Databases: Reference*.

---

## Replacing References to the DATE, TIME, DATETIME, and TODAY Functions

When the PROC SQL CONSTDATETIME option or the SQLCONSTDATETIME system option is set, PROC SQL evaluates the DATE, TIME, DATETIME, and TODAY functions in a query once, and uses those values throughout the query. Computing these values once ensures consistent results when the functions are used multiple times in a query, or when the query executes the functions close to a date or time boundary. When referencing database tables, performance is enhanced because it allows more of the query to be passed down to the database.

For more information, see the CONSTDATETIME option in the *Base SAS Procedures Guide* or the SQLCONSTDATETIME system option in *SAS Language Reference: Dictionary*.

*Note:* If you specify both the PROC SQL REDUCEPUT option or the SQLREDUCEPUT system option and the PROC SQL CONSTDATETIME option or the

SQLCONSTDATETIME system option, PROC SQL replaces the DATE, TIME, DATETIME, and TODAY functions with their respective values in order to determine the PUT function value before the query executes.  $\Delta$

---

## Disabling the Remerging of Data When Using Summary Functions

When you use a summary function in a SELECT clause or a HAVING clause, PROC SQL might remerge the data. Remerging the data involves two passes through the data. If you set the PROC SQL NOREMERGE option or the NOSQLREMERGE system option, PROC SQL will not process the remerging of data. When referencing database tables, performance is enhanced because it enables more of the query to be passed down to the database.

For more information, see the PROC SQL statement REMERGE option in the *Base SAS Procedures Guide* and the SQLREMERGE system option in *SAS Language Reference: Dictionary*.

---

## Accessing SAS System Information by Using DICTIONARY Tables

---

### What Are Dictionary Tables?

*DICTIONARY* tables are special read-only PROC SQL tables or views. They retrieve information about all the SAS libraries, SAS data sets, SAS system options, and external files that are associated with the current SAS session. For example, the DICTIONARY.COLUMNS table contains information such as name, type, length, and format, about all columns in all tables that are known to the current SAS session.

PROC SQL automatically assigns the DICTIONARY libref. To get information from DICTIONARY tables, specify DICTIONARY.*table-name* in the FROM clause in a SELECT statement in PROC SQL.

DICTIONARY.*table-name* is valid in PROC SQL only. However, SAS provides PROC SQL views, based on the DICTIONARY tables, that can be used in other SAS procedures and in the DATA step. These views are stored in the SASHELP library and are commonly called “SASHELP views.”

For an example of a DICTIONARY table, see “Reporting from DICTIONARY Tables” in the *Base SAS Procedures Guide*.

The following table describes the DICTIONARY tables that are available and shows the associated SASHELP views for each table.

**Table 5.1** DICTIONARY Tables and Associated SASHELP Views

DICTIONARY Table	SASHELP View	Description
CATALOGS	VCATALOG	Contains information about known SAS catalogs.
CHECK_CONSTRAINTS	VCHKCON	Contains information about known check constraints.
COLUMNS	VCOLUMN	Contains information about columns in all known tables.

<b>DICTIONARY Table</b>	<b>SASHELP View</b>	<b>Description</b>
CONSTRAINT_COLUMN_USAGE	VCNCOLU	Contains information about columns that are referred to by integrity constraints.
CONSTRAINT_TABLE_USAGE	VCNTABU	Contains information about tables that have integrity constraints defined on them.
DATAITEMS	VDATAIT	Contains information about known information map data items.
DESTINATIONS	VDEST	Contains information about known ODS destinations.
DICTIONARIES	VDCTNRY	Contains information about all DICTIONARY tables.
ENGINES	VENGINE	Contains information about SAS engines.
EXTFILES	VEXTFL	Contains information about known external files.
FILTERS	VFILTER	Contains information about known information map filters.
FORMATS	VFORMAT VCFORMAT	Contains information about currently accessible formats and informats.
FUNCTIONS	VFUNC	Contains information about currently accessible functions.
GOPTIONS	VGOPT VALLOPT	Contains information about currently defined graphics options (SAS/GRAPH software). SASHELP.VALLOPT includes SAS system options as well as graphics options.
INDEXES	VINDEX	Contains information about known indexes.
INFOMAPS	VINFOMP	Contains information about known information maps.
LIBNAMES	VLIBNAM	Contains information about currently defined SAS libraries.
MACROS	VMACRO	Contains information about currently defined macro variables.
MEMBERS	VMEMBER VSACCES VSCATLG VSLIB VSTABLE VSTABVW VSVIEW	Contains information about all objects that are in currently defined SAS libraries. SASHELP.VMEMBER contains information for all member types; the other SASHELP views are specific to particular member types (such as tables or views).
OPTIONS	VOPTION VALLOPT	Contains information about SAS system options. SASHELP.VALLOPT includes graphics options as well as SAS system options.

<b>DICTIONARY Table</b>	<b>SASHELP View</b>	<b>Description</b>
REFERENTIAL_CONSTRAINTS	VREFCON	Contains information about referential constraints.
REMEMBER	VREMEMB	Contains information about known remembers.
STYLES	VSTYLE	Contains information about known ODS styles.
TABLE_CONSTRAINTS	VTABCON	Contains information about integrity constraints in all known tables.
TABLES	VTABLE	Contains information about known tables.
TITLES	VTITLE	Contains information about currently defined titles and footnotes.
VIEWS	VVIEW	Contains information about known data views.

## Retrieving Information about DICTIONARY Tables and SASHELP Views

To see how each DICTIONARY table is defined, submit a DESCRIBE TABLE statement. This example shows the definition of DICTIONARY.TABLES:

```
proc sql;
    describe table dictionary.tables;
```

The results are written to the SAS log.

**Output 5.4** Definition of DICTIONARY.TABLES

```

NOTE: SQL table DICTIONARY.TABLES was created like:

create table DICTIONARY.TABLES
(
  libname char(8) label='Library Name',
  memname char(32) label='Member Name',
  memtype char(8) label='Member Type',
  dbms_memtype char(32) label='DBMS Member Type',
  memlabel char(256) label='Data Set Label',
  typemem char(8) label='Data Set Type',
  crdate num format=DATETIME informat=DATETIME label='Date Created',
  modate num format=DATETIME informat=DATETIME label='Date Modified',
  nobs num label='Number of Physical Observations',
  obslen num label='Observation Length',
  nvar num label='Number of Variables',
  protect char(3) label='Type of Password Protection',
  compress char(8) label='Compression Routine',
  encrypt char(8) label='Encryption',
  npage num label='Number of Pages',
  filesize num label='Size of File',
  pcompress num label='Percent Compression',
  reuse char(3) label='Reuse Space',
  bufsize num label='Bufsize',
  delobs num label='Number of Deleted Observations',
  nlobs num label='Number of Logical Observations',
  maxvar num label='Longest variable name',
  maxlabel num label='Longest label',
  maxgen num label='Maximum number of generations',
  gen num label='Generation number',
  attr char(3) label='Data Set Attributes',
  indxtype char(9) label='Type of Indexes',
  datarep char(32) label='Data Representation',
  sortname char(8) label='Name of Collating Sequence',
  sorttype char(4) label='Sorting Type',
  sortchar char(8) label='Charset Sorted By',
  reqvector char(24) format=$HEX48 informat=$HEX48 label='Requirements Vector',
  datarepname char(170) label='Data Representation Name',
  encoding char(256) label='Data Encoding',
  audit char(8) label='Audit Trail Active?',
  audit_before char(8) label='Audit Before Image?',
  audit_admin char(8) label='Audit Admin Image?',
  audit_error char(8) label='Audit Error Image?',
  audit_data char(8) label='Audit Data Image?',
  num_character num label='Number of Character Variables',
  num_numeric num label='Number of Numeric Variables'
);

```

Similarly, you can use the DESCRIBE VIEW statement in PROC SQL to determine how a SASHELP view is defined. Here is an example:

```

proc sql;
  describe view sashelp.vtable;

```

**Output 5.5** Description of SASHELP.VTABLE

```

NOTE: SQL view SASHELP.VSTABVW is defined as:

      select libname, memname, memtype
      from DICTIONARY.MEMBERS
      where (memtype='VIEW') or (memtype='DATA')
      order by libname asc, memname asc;

```

---

## Using DICTONARY.TABLES

DICTONARY tables are commonly used to monitor and manage SAS sessions because the data is more easily manipulated than the output from other sources such as PROC DATASETS. You can query DICTONARY tables the same way that you query any other table, including subsetting with a WHERE clause, ordering the results, and creating PROC SQL views.

Note that many character values in the DICTONARY tables are stored as all-uppercase characters; you should design your queries accordingly.

Because DICTONARY tables are read-only objects, you cannot insert rows or columns, alter column attributes, or add integrity constraints to them.

*Note:* For DICTONARY.TABLES and SASHELP.VTABLE, if a table is read-protected with a password, then the only information that is listed for that table is the library name, member name, member type, and type of password protection. All other information is set to missing.  $\Delta$

*Note:* An error occurs if DICTONARY.TABLES is used to retrieve information about an SQL view that exists in one library but has an input table from a second library that has not been assigned.  $\Delta$

The following query uses a SELECT and subsetting WHERE clause to retrieve information about permanent tables and views that appear in the SQL library:

```
proc sql;
  title 'All Tables and Views in the SQL Library';
  select libname, memname, memtype, nobs
     from dictionary.tables
     where libname='SQL';
```



**Output 5.6** Tables and Views Used in This Document

All Tables and Views in the SQL Library			
Library Name	Member Name	Member Type	Number of Physical Observations
SQL	A	DATA	4
SQL	B	DATA	3
SQL	CITYREPORT	DATA	132
SQL	CONTINENTS	DATA	9
SQL	COUNTRIES	DATA	209
SQL	DENSITIES	DATA	10
SQL	EXTREMETEMPS	DATA	20
SQL	FEATURES	DATA	76
SQL	MYSTATES	DATA	0
SQL	NEWCONTINENTS	VIEW	.
SQL	NEWCOUNTRIES	DATA	6
SQL	NEWPOP	DATA	14
SQL	NEWSTATES	DATA	0
SQL	OILPROD	DATA	31
SQL	OILRSRVS	DATA	26
SQL	POSTALCODES	DATA	59
SQL	REFEREE	DATA	4
SQL	STATECODES	DATA	51
SQL	UNITEDSTATES	DATA	57
SQL	USCITYCOORDS	DATA	132
SQL	USPOSTAL	DATA	0
SQL	WORLDCITYCOORDS	DATA	222
SQL	WORLDCOUNTRIES	DATA	208
SQL	WORLDTEMPS	DATA	59

**Using DICTIONARY.COLUMNS**

DICTIONARY tables are useful when you want to find specific columns to include in reports. The following query shows which of the tables that are used in this document contain the Country column:

```
proc sql;
  title 'All Tables That Contain the Country Column';
  select libname, memname, name
  from dictionary.columns
  where name='Country' and
         libname='SQL';
```

**Output 5.7** Using DICTIONARY.COLUMNS to Locate Specific Columns

All Tables That Contain the Country Column		
Library Name	Member Name	Column Name
SQL	OILPROD	Country
SQL	OILRSRVS	Country
SQL	WORLDCITYCOORDS	Country
SQL	WORLDTEMPS	Country

---

## DICTIONARY Tables and Performance

When querying a DICTONARY table, SAS launches a discovery process that gathers information that is pertinent to that table. Depending on the DICTONARY table that is being queried, this discovery process can search libraries, open tables, and execute views. Unlike other SAS procedures and the DATA step, PROC SQL can mitigate this process by optimizing the query before the discovery process is launched. Therefore, although it is possible to access DICTONARY table information with SAS procedures or the DATA step by using the SASHELP views, it is often more efficient to use PROC SQL instead.

*Note:* You cannot use data set options with DICTONARY tables.  $\Delta$

For example, the following programs produce the same result, but the PROC SQL step runs much faster because the WHERE clause is processed before the tables that are referenced by the SASHELP.VCOLUMN view are opened:

```
data mytable;
  set sashelp.vcolumn;
  where libname='WORK' and memname='SALES';
run;

proc sql;
  create table mytable as
    select * from sashelp.vcolumn
    where libname='WORK' and memname='SALES';
quit;
```

*Note:* SAS does not maintain DICTONARY table information between queries. Each query of a DICTONARY table launches a new discovery process.  $\Delta$

If you are querying the same DICTONARY table several times in a row, then you can get even faster performance by creating a temporary SAS data set (with the DATA step SET statement or the PROC SQL CREATE TABLE AS statement) with the information that you want and running your query against that data set.

When you query DICTONARY.TABLES or SASHELP.VTABLE, all the tables and views in all the libraries that are assigned to the SAS session are opened to retrieve the requested information.

You can use a WHERE clause to help restrict which libraries are searched. However, the WHERE clause will not process most function calls such as UPCASE.

For example, if **where UPCASE (libname) = 'WORK'** is used, the UPCASE function prevents the WHERE clause from optimizing this condition. All libraries that are assigned to the SAS session are searched. Searching all the libraries could cause an unexpected increase in search time, depending on the number of libraries that are assigned to the SAS session.

The DICTONARY information for LIBNAME and MEMNAME values is stored in uppercase. If you supply values for LIBNAME and MEMNAME values in uppercase; that is, if you remove the UPCASE function, the WHERE clause will be optimized and performance will be improved. In the previous example, the code would be changed to **where libname='WORK'**.

*Note:* If you query table information from a library that is assigned to an external database and you use the LIBNAME statement PRESERVE\_TAB\_NAMES=YES option, you should supply the LIBNAME and MEMNAME values in uppercase and place the MEMNAME keyword in the UPCASE function.

If you query column information from a library that is assigned to an external database and you use the LIBNAME statement PRESERVE\_COL\_NAMES=YES option, you should supply the NAME value in uppercase and place the NAME keyword in the UPCASE function.  $\Delta$

---

## Using SAS Data Set Options with PROC SQL

In PROC SQL, you can apply most of the SAS data set options, such as KEEP= and DROP=, to tables or SAS/ACCESS views any time that you specify a table or SAS/ACCESS view. In the SQL procedure, SAS data set options that are separated by spaces are enclosed in parentheses. The data set options immediately follow the table or SAS/ACCESS view name. In the following PROC SQL step, the RENAME= data set option renames LNAME to LASTNAME for the STAFF1 table. The OBS= data set option restricts the number of rows that are read from STAFF1 to 15:

```
proc sql;
  create table
    staff1(rename=(lname=lastname)) as
  select *
    from staff(obs=15);
```

SAS data set options can be combined with SQL statement arguments. In the following PROC SQL step, the PW= data set option assigns a password to the TEST table, and the ALTER= data set option assigns an alter password to the STAFF1 table:

```
proc sql;
  create table test
    (a character, b numeric, pw=cat);
  create index staffidx on
    staff1 (lastname, alter=dog);
```

In this PROC SQL step, the PW= data set option assigns a password to the ONE table. The password is used when inserting a row and updating the table.

```
proc sql;
  create table one(pw=red, col1 num, col2 num, col3 num);
quit;

proc sql;
  insert into one(pw=red, col1, col3)
  values(1, 3);
quit;
proc sql;
  update one(pw=red)
  set col2 = 22
  where col2 = . ;
quit;
```

You cannot use SAS data set options with DICTIONARY tables because DICTIONARY tables are read-only objects.

The only SAS data set options that you can use with PROC SQL views are data set options that assign and provide SAS passwords: READ=, WRITE=, ALTER=, and PW=.

For more information about SAS data set options, see *SAS Language Reference: Dictionary*.

## Using PROC SQL with the SAS Macro Facility

The macro facility is a programming tool that you can use to extend and customize SAS software. The macro facility reduces the amount of text that you must enter to perform common or repeated tasks and improves the efficiency and usefulness of your SQL programs.

The macro facility enables you to assign a name to character strings or groups of SAS programming statements. Thereafter, you can work with the names rather than with the text itself. For more information about the SAS macro facility, see *SAS Macro Language: Reference*.

Macro variables provide an efficient way to replace text strings in SAS code. The macro variables that you create and name are called *user-defined macro variables*. The macros variables that are defined by SAS are called *automatic macro variables*. PROC SQL produces six automatic macro variables (SQLOBS, SQLRC, SQLOOPS, SQLEXITCODE, SQLXRC, and SQLXMSG) to help you troubleshoot your programs. For more information, see “Using the PROC SQL Automatic Macro Variables” on page 133.

---

### Creating Macro Variables in PROC SQL

Other software vendors’ SQL products allow the embedding of SQL into another language. References to variables (columns) of that language are termed *host-variable references*. They are differentiated from references to columns in tables by names that are prefixed with a colon. The host-variable stores the values of the object-items that are listed in the SELECT clause.

The only host language that is currently available in SAS is the macro language, which is part of Base SAS software. When a calculation is performed on a column’s value, its result can be stored, using *:macro-variable*, in the macro facility. The result can then be referenced by that name in another PROC SQL query or SAS procedure. Host-variable can be used only in the outer query of a SELECT statement, not in a subquery. Host-variable cannot be used in a CREATE statement.

If the query produces more than one row of output, then the macro variable will contain only the value from the first row. If the query has no rows in its output, then the macro variable is not modified. If the macro variable does not exist yet, it will not be created. The PROC SQL macro variable SQLOBS contains the number of rows that are produced by the query.

*Note:* The SQLOBS automatic macro variable is assigned a value *after* the SQL SELECT statement executes.  $\triangle$

### Creating Macro Variables from the First Row of a Query Result

If you specify a single macro variable in the INTO clause, then PROC SQL assigns the variable the value from the first row only of the appropriate column in the SELECT list. In this example, &country1 is assigned the value from the first row of the Country column, and &barrels1 is assigned the value from the first row of the Barrels column. The NOPRINT option prevents PROC SQL from displaying the results of the query. The %PUT statement writes the contents of the macro variables to the SAS log.

```
proc sql noprint;
  select country, barrels
    into :country1, :barrels1
    from sql.oilrsrvs;
```

```
%put &country1 &barrels1;
```

#### Output 5.8 Creating Macro Variables from the First Row of a Query Result

```
4 proc sql noprint;
5   select country, barrels
6     into :country1, :barrels1
7     from sql.oilrsrvs;
8
9   %put &country1 &barrels1;
Algeria                               9,200,000,000
NOTE: PROCEDURE SQL used:
      real time           0.12 seconds
```

### Creating a Macro Variable from the Result of an Aggregate Function

A useful feature of macro variables is that they enable you to display data values in SAS titles. The following example prints a subset of the WORLDTEMPS table and lists the highest temperature in Canada in the title:

```
proc sql outobs=12;
  reset noprint;
  select max(AvgHigh)
    into :maxtemp
    from sql.worldtemps
    where country = 'Canada';
reset print;
  title "The Highest Temperature in Canada: &maxtemp";
  select city, AvgHigh format 4.1
    from sql.worldtemps
    where country = 'Canada';
```

*Note:* You must use double quotation marks in the TITLE statement to resolve the reference to the macro variable.  $\Delta$

#### Output 5.9 Including a Macro Variable Reference in the Title

The Highest Temperature in Canada:		80
City	Avg High	
Montreal	77.0	
Quebec	76.0	
Toronto	80.0	

### Creating Multiple Macro Variables

You can create one new macro variable per row from the result of a SELECT statement. Use the keywords THROUGH, THRU, or a hyphen (-) in an INTO clause to create a range of macro variables.

*Note:* When you specify a range of macro variables, the SAS macro facility creates only the number of macro variables that are needed. For example, if you specify

**:var1-:var9999** and only 55 variables are needed, only **:var1-:var55** is created. The **SQLOBS** automatic variable is useful if a subsequent part of your program needs to know how many variables were actually created. In this example, **SQLOBS** would have a value of 55.  $\Delta$

This example assigns values to macro variables from the first four rows of the **Name** column and the first three rows of the **Population** column. The **%PUT** statements write the results to the SAS log.

```
proc sql noprint;
  select name, Population
         into :country1 - :country4, :pop1 - :pop3
         from sql.countries;

  %put &country1 &pop1;
  %put &country2 &pop2;
  %put &country3 &pop3;
  %put &country4;
```

#### Output 5.10 Creating Multiple Macro Variables

```
4  proc sql noprint;
5      select name, Population
6          into :country1 - :country4, :pop1 - :pop3
7          from sql.countries;
8
9  %put &country1 &pop1;
Afghanistan 17070323
10 %put &country2 &pop2;
Albania 3407400
11 %put &country3 &pop3;
Algeria 28171132
12 %put &country4;
Andorra
```

---

## Concatenating Values in Macro Variables

You can concatenate the values of one column into one macro variable. This form is useful for building a list of variables or constants. Use the **SEPARATED BY** keywords to specify a character to delimit the values in the macro variable.

This example assigns the first five values from the **Name** column of the **COUNTRIES** table to the **&countries** macro variable. The **INOBS** option limits **PROC SQL** to using the first five rows of the **COUNTRIES** table. A comma and a space are used to delimit the values in the macro variable.

```
proc sql noprint inobs=5;
  select Name
         into :countries separated by ', '
         from sql.countries;

  %put &countries;
```

**Output 5.11** Concatenating Values in Macro Variables

```

4  proc sql noprint inobs=5;
5      select Name
6          into :countries separated by ', '
7          from sql.countries;
WARNING: Only 5 records were read from SQL.COUNTRIES due to INOBS= option.
8
9  %put &countries;
Afghanistan, Albania, Algeria, Andorra, Angola

```

The leading and trailing blanks are trimmed from the values before the macro variables are created. If you do not want the blanks to be trimmed, then add NOTRIM to the INTO clause. Here is the previous example with NOTRIM added:

```

proc sql noprint inobs=5;
    select Name
        into :countries separated by ', ' NOTRIM
        from sql.countries;

%put &countries;

```

**Output 5.12** Concatenating Values in Macro Variables—Blanks Not Removed

```

1  proc sql noprint inobs=5;
2      select Name
3          into :countries separated by ', ' NOTRIM
4          from sql.countries;
WARNING: Only 5 records were read from SQL.COUNTRIES due to INOBS= option.
5
6  %put &countries;
Afghanistan          ,Albania          ,Algeria
                    ,Andorra          ,Angola

```

**Defining Macros to Create Tables**

Macros are useful as interfaces for table creation. You can use the SAS macro facility to help you create new tables and add rows to existing tables.

The following example creates a table that lists people to serve as referees for reviews of academic papers. No more than three people per subject are allowed in a table. The macro that is defined in this example checks the number of referees before it inserts a new referee's name into the table. The macro has two parameters: the referee's name and the subject matter of the academic paper.

```

proc sql;
create table sql.referee
    (Name      char(15),
    Subject    char(15));

/* define the macro */
%macro addref(name,subject);
%local count;

/* are there three referees in the table? */

```

```

reset noprint;
  select count(*)
    into :count
    from sql.referee
    where subject="&subject";

%if &count ge 3 %then %do;
  reset print;
  title "ERROR: &name not inserted for subject -- &subject..";
  title2 "          There are 3 referees already.";
  select * from sql.referee where subject="&subject";
  reset noprint;
%end;

%else %do;
  insert into sql.referee(name,subject) values("&name",&subject");
  %put NOTE: &name has been added for subject -- &subject..;
%end;

%mend;

```

Submit the %ADDREF() macro with its two parameters to add referee names to the table. Each time you submit the macro, a message is written to the SAS log.

```

%addref(Conner,sailing);
%addref(Fay,sailing);
%addref(Einstein,relativity);
%addref(Smythe,sailing);
%addref(Naish,sailing);

```

#### Output 5.13 Defining Macros to Create Tables

```

34 %addref(Conner,sailing);
NOTE: 1 row was inserted into SQL.REFEREE.

NOTE: Conner has been added for subject - sailing.
35 %addref(Fay,sailing);
NOTE: 1 row was inserted into SQL.REFEREE.

NOTE: Fay has been added for subject - sailing.
36 %addref(Einstein,relativity);
NOTE: 1 row was inserted into SQL.REFEREE.

NOTE: Einstein has been added for subject - relativity.
37 %addref(Smythe,sailing);
NOTE: 1 row was inserted into SQL.REFEREE.

NOTE: Smythe has been added for subject - sailing.
38 %addref(Naish,sailing);

```

The output has a row added with each execution of the %ADDREF() macro. When the table contains three referee names, it is displayed in SAS output with the message that it can accept no more referees.



**Output 5.14** Result Table and Message Created with SAS Macro Language Interface

ERROR: Naish not inserted for subject - sailing. There are 3 referees already.	
Name	Subject
-----	
Conner	sailing
Fay	sailing
Smythe	sailing

---

## Using the PROC SQL Automatic Macro Variables

PROC SQL sets up macro variables with certain values after it executes each statement. These macro variables can be tested inside a macro to determine whether to continue executing the PROC SQL step.

After each PROC SQL statement has executed, the following macro variables are updated with these values:

**SQLEXITCODE**

contains the highest return code that occurred from some types of SQL insert failures. This return code is written to the SYSERR macro variable when PROC SQL terminates.

**SQLOBS**

contains the number of rows that were processed by an SQL procedure statement. For example, the SQLOBS macro variable contains the number of rows that were formatted and displayed in SAS output by a SELECT statement or the number of rows that were deleted by a DELETE statement.

When the NOPRINT option is specified, the value of the SQLOBS macro variable depends on whether an output table, single macro variable, macro variable list, or macro variable range is created:

- If no output table, macro variable list, or macro variable range is created, then SQLOBS contains the value 1.
- If an output table is created, then SQLOBS contains the number of rows in the output table.
- If a single macro variable is created, then SQLOBS contains the value 1.
- If a macro variable list or macro variable range is created, then SQLOBS contains the number of rows that are processed to create the macro variable list or range.

If an SQL view is created, then SQLOBS contains the value 0.

*Note:* The SQLOBS automatic macro variable is assigned a value *after* the SQL SELECT statement executes.  $\Delta$

**SQLOOPS**

contains the number of iterations that the inner loop of PROC SQL processes. The number of iterations increases proportionally with the complexity of the query. For more information, see “Limiting Iterations with the LOOPS= Option” on page 113 and the LOOPS= option in the *Base SAS Procedures Guide*.

**SQLRC**

contains the following status values that indicate the success of the SQL procedure statement:

- 0  
PROC SQL statement completed successfully with no errors.
- 4  
PROC SQL statement encountered a situation for which it issued a warning. The statement continued to execute.
- 8  
PROC SQL statement encountered an error. The statement stopped execution at this point.
- 12  
PROC SQL statement encountered an internal error, indicating a bug in PROC SQL that should be reported to SAS Technical Support. These errors can occur only during compile time.
- 16  
PROC SQL statement encountered a user error. For example, this error code is used, when a subquery (that can return only a single value) evaluates to more than one row. These errors can be detected only during run time.
- 24  
PROC SQL statement encountered a system error. For example, this error is used, if the system cannot write to a PROC SQL table because the disk is full. These errors can occur only during run time.
- 28  
PROC SQL statement encountered an internal error, indicating a bug in PROC SQL that should be reported to SAS Technical Support. These errors can occur only during run time.

The value of SQLRC can vary based on the value of the PROC SQL statement UNDO\_POLICY= option or the SQLLUNDOPOLICY system option.

For example, the values for the SQLRC return code differ based on the value of the UNDO\_POLICY= option or the SQLLUNDOPOLICY system option if you attempt to insert duplicate values into an index that is defined using the CREATE UNIQUE INDEX statement:

- If you set the UNDO\_POLICY= option or the SQLLUNDOPOLICY system option to either REQUIRED or OPTIONAL, and you attempt to insert a duplicate index value, SAS creates and tries to maintain a copy of the table before and after updates are applied. SAS detects an error condition and supplies a return code to PROC SQL, which stops execution as soon as the error condition is received. SQLRC contains the value 24.
- If you set the UNDO\_POLICY= option or the SQLLUNDOPOLICY system option to NONE and you attempt to insert a duplicate index value, SAS does not create a before-and-after copy of the table. SAS does not detect an error condition and does not supply a return code to PROC SQL, which attempts to continue to process the updates. SQLRC contains the value 8.

**SQLXMSG**

contains descriptive information and the DBMS-specific return code for the error that is returned by the Pass-Through Facility.

*Note:* Because the value of the SQLXMSG macro variable can contain special characters (such as &, %, /, \*, and ;), use the %SUPERQ macro function when printing the following value:

```
%put %superq(sqlxmsg);
```

For information about the %SUPERQ function, see *SAS Macro Language: Reference*.  $\Delta$

### SQLXRC

contains the DBMS-specific return code that is returned by the Pass-Through Facility.

Macro variables that are generated by PROC SQL follow the scoping rules for %LET. For more information about macro variable scoping, see *SAS Macro Language: Reference*.

Users of SAS/AF software can access these automatic macro variables in SAS Component Language (SCL) programs by using the SYMGET function. The following example uses the VALIDATE statement in a SAS/AF software application to check the syntax of a block of code. Before it issues the CREATE VIEW statement, the application checks that the view is accessible.

```
submit sql immediate;
  validate &viewdef;
end submit;

if symget('SQLRC') gt 4 then
  do;
    ... the view is not valid ...
  end;
else do;
  submit sql immediate;
    create view &viewname as &viewdef;
  end submit;
end;
```

The following example retrieves the data from the COUNTRIES table, but does not display the table because the NOPRINT option is specified in the PROC SQL statement. The %PUT macro language statement displays the three automatic macro variable values in the SAS log. For more information about the %PUT statement and the SAS macro facility, see *SAS Macro Language: Reference*.

```
proc sql noprint;
  select * from sql.countries;
  %put SQLOBS=*&sqlobs* SQLOOPS=*&sqloops* SQLRC=*&sqlrc*;
```

#### Output 5.15 Using the PROC SQL Automatic Macro Variables

```
SQLOBS=*1* SQLOOPS=*11* SQLRC=*0*
```

Notice that the value of SQLOBS is 1. When the NOPRINT option is used and no table or macro variables are created, SQLOBS returns a value of 1 because only one row is processed.

*Note:* You can use the \_AUTOMATIC\_ option in the %PUT statement to list the values of all automatic macro variables. The list depends on the SAS products that are installed at your site.  $\Delta$

## Formatting PROC SQL Output by Using the REPORT Procedure

SQL provides limited output formatting capabilities. Some SQL vendors add output formatting statements to their products to address these limitations. SAS has reporting tools that enhance the appearance of PROC SQL output.

For example, SQL cannot display only the first occurrence of a repeating value in a column in its output. The following example lists cities in the USCITYCOORDS table. Notice the repeating values in the State column.

```
proc sql outobs=10;
  title 'US Cities';
  select State, City, latitude, Longitude
  from sql.uscitycoords
  order by state;
```

**Output 5.16** USCITYCOORDS Table Showing Repeating State Values

US Cities				
State	City	Latitude	Longitude	
AK	Sitka	57	-135	
AK	Anchorage	61	-150	
AK	Nome	64	-165	
AK	Juneau	58	-134	
AL	Mobile	31	-88	
AL	Montgomery	32	-86	
AL	Birmingham	33	-87	
AR	Hot Springs	34	-93	
AR	Little Rock	35	-92	
AZ	Flagstaff	35	-112	

The following code uses PROC REPORT to format the output so that the state codes appear only once for each state group. A WHERE clause subsets the data so that the report lists the coordinates of cities in Pacific Rim states only. For more information about PROC REPORT, see the *Base SAS Procedures Guide*.

```
proc sql noprint;
  create table sql.cityreport as
  select *
  from sql.uscitycoords
  group by state;

proc report data=sql.cityreport
  headline
  headskip;
  title 'Coordinates of U.S. Cities in Pacific Rim States';
  column state city ('Coordinates' latitude longitude);
  define state / order format=$2. width=5 'State';
  define city / order format=$15. width=15 'City';
  define latitude / display format=4. width=8 'Latitude';
  define longitude / display format=4. width=9 'Longitude';
  where state='AK' or
  state='HI' or
```

```

state='WA' or
state='OR' or
state='CA';

run;

```

**Output 5.17** PROC REPORT Output Showing the First Occurrence Only of Each State Value

Coordinates of U.S. Cities in Pacific Rim States			
State	City	Coordinates	
		Latitude	Longitude
-----			
AK	Anchorage	61	-150
	Juneau	58	-134
	Nome	64	-165
	Sitka	57	-135
CA	El Centro	32	-115
	Fresno	37	-120
	Long Beach	34	-118
	Los Angeles	34	-118
	Oakland	38	-122
	Sacramento	38	-121
	San Diego	33	-117
	San Francisco	38	-122
	San Jose	37	-122
	HI	Honolulu	21
OR	Baker	45	-118
	Eugene	44	-124
	Klamath Falls	42	-122
	Portland	45	-123
	Salem	45	-123
WA	Olympia	47	-123
	Seattle	47	-122
	Spokane	48	-117

## Accessing a DBMS with SAS/ACCESS Software

SAS/ACCESS software for relational databases provides an interface between SAS software and data in other vendors' database management systems (DBMSs). SAS/ACCESS software provides dynamic access to DBMS data through the SAS/ACCESS LIBNAME statement and the PROC SQL Pass-Through Facility. The LIBNAME statement enables you to assign SAS librefs to DBMS objects such as schemas and databases. The Pass-Through Facility enables you to interact with a DBMS by using its SQL syntax without leaving your SAS session.

It is recommended that you use the SAS/ACCESS LIBNAME statement to access your DBMS data because it is usually the fastest and most direct method of accessing DBMS data. The LIBNAME statement offers the following advantages:

- Significantly fewer lines of SAS code are required to perform operations in your DBMS. For example, a single LIBNAME statement establishes a connection to your DBMS, enables you to specify how your data is processed, and enables you to easily browse your DBMS tables in SAS.
- You do not need to know your DBMS's SQL language to access and manipulate your DBMS data. You can use SAS procedures, such as PROC SQL, or DATA step programming on any libref that references DBMS data. You can read, insert,

update, delete, and append data, as well as create and drop DBMS tables by using normal SAS syntax.

- The LIBNAME statement provides more control over DBMS operations such as locking, spooling, and data type conversion through the many LIBNAME options and data set options.
- The LIBNAME engine optimizes the processing of joins and WHERE clauses by passing these operations directly to the DBMS to take advantage of the indexing and other processing capabilities of your DBMS.

An exception to this recommendation occurs when you need to use SQL that does not conform to the ANSI standard. The SAS/ACCESS LIBNAME statement accepts only ANSI-standard SQL, but the PROC SQL Pass-Through Facility accepts all the extensions to SQL that are provided by your DBMS. Another advantage of this access method is that Pass-Through Facility statements enable the DBMS to optimize queries when the queries have summary functions (such as AVG and COUNT), GROUP BY clauses, or columns that were created by expressions (such as the COMPUTED function).

For more information about SAS/ACCESS software, see *SAS/ACCESS for Relational Databases: Reference*.

---

## Connecting to a DBMS by Using the LIBNAME Statement

Use the LIBNAME statement to read from and write to a DBMS object as if it were a SAS data set. After connecting to a DBMS table or view by using the LIBNAME statement, you can use PROC SQL to interact with the DBMS data.

For many DBMSs, you can directly access DBMS data by assigning a libref to the DBMS by using the SAS/ACCESS LIBNAME statement. Once you have associated a libref with the DBMS, you can specify a DBMS table in a two-level SAS name and work with the table like any SAS data set. You can also embed the LIBNAME statement in a PROC SQL view (see the CREATE VIEW statement in the *Base SAS Procedures Guide*).

PROC SQL takes advantage of the capabilities of a DBMS by passing it certain operations whenever possible. For example, before implementing a join, PROC SQL checks to determine whether the DBMS can perform the join. If it can, then PROC SQL passes the join to the DBMS, which enhances performance by reducing data movement and translation. If the DBMS cannot perform the join, then PROC SQL processes the join. Using the SAS/ACCESS LIBNAME statement can often provide you with the performance benefits of the SQL Procedure Pass-Through Facility without writing DBMS-specific code.

*Note:* You can use the DBIDIRECTEXEC system option to send a PROC SQL CREATE TABLE AS SELECT statement or a DELETE statement directly to the database for execution, which could result in CPU and I/O performance improvement. For more information, see the SAS/ACCESS documentation for your DBMS.  $\Delta$

To use the SAS/ACCESS LIBNAME statement, you must have SAS/ACCESS software installed for your DBMS. For more information about the SAS/ACCESS LIBNAME statement, see the SAS/ACCESS documentation for your DBMS.

## Querying a DBMS Table

This example uses PROC SQL to query the ORACLE table PAYROLL. The PROC SQL query retrieves all job codes and provides a total salary amount for each job code.

```
libname mydblib oracle user=user-id password=password
                path=path-name schema=schema-name;
```

```

proc sql;
  select jobcode label='Jobcode',
         sum(salary) as total
         label='Total for Group'
         format=dollar11.2
  from mydblib.payroll
  group by jobcode;
quit;

```

**Output 5.18** Output from Querying a DBMS Table

Jobcode	Total for Group
BCK	\$232,148.00
FA1	\$253,433.00
FA2	\$447,790.00
FA3	\$230,537.00
ME1	\$228,002.00
ME2	\$498,076.00
ME3	\$296,875.00
NA1	\$210,161.00
NA2	\$157,149.00
PT1	\$543,264.00
PT2	\$879,252.00
PT3	\$21,009.00
SCP	\$128,162.00
TA1	\$249,492.00
TA2	\$671,499.00
TA3	\$476,155.00

### Creating a PROC SQL View of a DBMS Table

PROC SQL views are stored query expressions that read data values from their underlying files, which can include SAS/ACCESS views of DBMS data. While DATA step views of DBMS data can be used only to read the data, PROC SQL views of DBMS data can be used to update the underlying data if the following conditions are met:

- The PROC SQL view is based on only one DBMS table (or on a DBMS view that is based on only one DBMS table).
- The PROC SQL view has no calculated fields.

The following example uses the LIBNAME statement to connect to an ORACLE database, create a temporary PROC SQL view of the ORACLE table SCHEDULE, and print the view by using the PRINT procedure. The LIBNAME engine optimizes the processing of joins and WHERE clauses by passing these operations directly to the DBMS to take advantage of DBMS indexing and processing capabilities.

```

libname mydblib oracle user=user-id password=password
proc sql;
  create view LON as
  select flight, dates, idnum
  from mydblib.schedule
  where dest='LON';
quit;

```

```
proc print data=work.LON noobs;
run;
```

**Output 5.19** Output from the PRINT Procedure

FLIGHT	DATES	IDNUM
219	04MAR1998:00:00:00	1739
219	04MAR1998:00:00:00	1478
219	04MAR1998:00:00:00	1130
219	04MAR1998:00:00:00	1125
219	04MAR1998:00:00:00	1983
219	04MAR1998:00:00:00	1332
219	05MAR1998:00:00:00	1428
219	05MAR1998:00:00:00	1442
219	05MAR1998:00:00:00	1422
219	05MAR1998:00:00:00	1413
219	05MAR1998:00:00:00	1574
219	05MAR1998:00:00:00	1332
219	06MAR1998:00:00:00	1106
219	06MAR1998:00:00:00	1118
219	06MAR1998:00:00:00	1425
219	06MAR1998:00:00:00	1434
219	06MAR1998:00:00:00	1555
219	06MAR1998:00:00:00	1332

---

## Connecting to a DBMS by Using the SQL Procedure Pass-Through Facility

### What Is the Pass-Through Facility?

The SQL Procedure Pass-Through Facility enables you to send DBMS-specific SQL statements directly to a DBMS for execution. The Pass-Through Facility uses a SAS/ACCESS interface engine to connect to the DBMS. Therefore, you must have SAS/ACCESS software installed for your DBMS.

You submit SQL statements that are DBMS-specific. For example, you pass Transact-SQL statements to a Sybase database. The Pass-Through Facility's basic syntax is the same for all the DBMSs. Only the statements that are used to connect to the DBMS and the SQL statements are DBMS-specific.

With the Pass-Through Facility, you can perform the following tasks:

- Establish a connection with the DBMS by using a `CONNECT` statement and terminate the connection with the `DISCONNECT` statement.
- Send nonquery DBMS-specific SQL statements to the DBMS by using the `EXECUTE` statement.
- Retrieve data from the DBMS to be used in a PROC SQL query with the `CONNECTION TO` component in a `SELECT` statement's `FROM` clause.

You can use the Pass-Through Facility statements in a query, or you can store them in a PROC SQL view. When a view is stored, any options that are specified in the corresponding `CONNECT` statement are also stored. Thus, when the PROC SQL view is used in a SAS program, SAS can automatically establish the appropriate connection to the DBMS.



For more information, see the CONNECT statement, the DISCONNECT statement, the EXECUTE statement, and the CONNECTION TO statement in the *Base SAS Procedures Guide*, and “The Pass-Through Facility for Relational Databases” in *SAS/ACCESS for Relational Databases: Reference*.

*Note:* SAS procedures that perform multipass processing cannot operate on PROC SQL views that store Pass-Through Facility statements, because the Pass-Through Facility does not allow reopening of a table after the first record has been retrieved. To work around this limitation, create a SAS data set from the view and use the SAS data set as the input data set.  $\Delta$

## Return Codes

As you use PROC SQL statements that are available in the Pass-Through Facility, any errors are written to the SAS log. The return codes and messages that are generated by the Pass-Through Facility are available to you through the SQLXRC and SQLXMSG macro variables. Both macro variables are described in “Using the PROC SQL Automatic Macro Variables” on page 133.

## Pass-Through Example

In this example, SAS/ACCESS connects to an ORACLE database by using the alias **ora2**, selects all rows in the STAFF table, and displays the first 15 rows of data by using PROC SQL.

```
proc sql outobs=15;
  connect to oracle as ora2 (user=user-id password=password);
  select * from connection to ora2 (select lname, fname, state from staff);
  disconnect from ora2;
quit;
```

**Output 5.20** Output from the Pass-Through Facility Example

LNAME	FNAME	STATE
ADAMS	GERALD	CT
ALIBRANDI	MARIA	CT
ALHERTANI	ABDULLAH	NY
ALVAREZ	MERCEDES	NY
ALVAREZ	CARLOS	NJ
BAREFOOT	JOSEPH	NJ
BAUCOM	WALTER	NY
BANADYGA	JUSTIN	CT
BLALOCK	RALPH	NY
BALLETTI	MARIE	NY
BOWDEN	EARL	CT
BRANCACCIO	JOSEPH	NY
BREUHAUS	JEREMY	NY
BRADY	CHRISTINE	CT
BREWCZAK	JAKOB	CT

---

## Updating PROC SQL and SAS/ACCESS Views

You can update PROC SQL and SAS/ACCESS views by using the INSERT, DELETE, and UPDATE statements, under the following conditions:

- If the view accesses a DBMS table, then you must have been granted the appropriate authorization by the external database management system (for example, DB2). You must have installed the SAS/ACCESS software for your DBMS. For more information about SAS/ACCESS views, see the SAS/ACCESS interface guide for your DBMS.
- You can update only a single table through a view. The table cannot be joined to another table or linked to another table with a set-operator. The view cannot contain a subquery.
- You can update a column in a view by using the column's alias, but you cannot update a derived column—that is, a column that is produced by an expression. In the following example, you can update the column SS, but not WeeklySalary:

```
create view EmployeeSalaries as
  select Employee, SSNumber as SS,
         Salary/52 as WeeklySalary
  from employees;
```

- You cannot update a view that contains an ORDER BY.

*Note:* Beginning with SAS 9, PROC SQL views, the Pass-Through Facility, and the SAS/ACCESS LIBNAME statement are the preferred ways to access relational DBMS data. SAS/ACCESS views are no longer recommended. You can convert existing SAS/ACCESS views to PROC SQL views by using the CV2VIEW procedure. For more information, see the CV2VIEW Procedure in *SAS/ACCESS for Relational Databases: Reference*.  $\triangle$

---

## Using the Output Delivery System with PROC SQL

The Output Delivery System (ODS) enables you to produce the output from PROC SQL in a variety of different formats such as PostScript, HTML, or list output. ODS defines the structure of the raw output from SAS procedures and from the SAS DATA step. The combination of data with a definition of its output structure is called an *output object*. Output objects can be sent to any of the various ODS destinations, which include listing, HTML, output, and printer. When new destinations are added to ODS, they automatically become available to PROC SQL, to all other SAS procedures that support ODS, and to the DATA step. For more information about ODS, see the *SAS Output Delivery System: User's Guide*.

The following example opens the HTML destination and specifies ODSOUT.HTM as the file that will contain the HTML output. The output from PROC SQL is sent to ODSOUT.HTM.

*Note:* This example uses filenames that might not be valid in all operating environments. To run the example successfully in your operating environment, you might need to change the file specifications.  $\triangle$

*Note:* Some browsers require an extension of HTM or HTML on the filename.  $\triangle$

```
ods html body='odsout.htm';
proc sql outobs=12;
```

```


title 'Coordinates of U.S. Cities';
select *
  from sql.uscitycoords;
ods html close;

```

**Display 5.1** ODS HTML Output

<b><i>Coordinates of U.S. Cities</i></b>			
<b>City</b>	<b>State</b>	<b>Latitude</b>	<b>Longitude</b>
Albany	NY	43	-74
Albuquerque	NM	36	-106
Amarillo	TX	35	-102
Anchorage	AK	61	-150
Annapolis	MD	39	-77
Atlanta	GA	34	-84
Augusta	ME	44	-70
Austin	TX	30	-98
Baker	OR	45	-118
Baltimore	MD	39	-76
Bangor	ME	45	-69
Baton Rouge	LA	31	-91



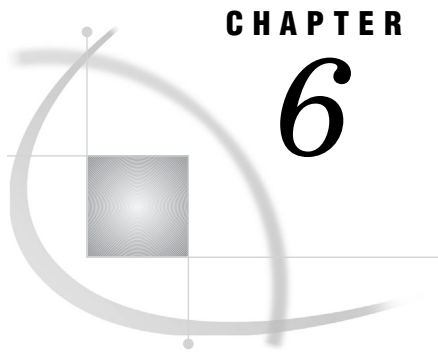

## CHAPTER

## 6

# Practical Problem-Solving with PROC SQL

<i>Overview</i>	<b>146</b>
<i>Computing a Weighted Average</i>	<b>146</b>
<i>Problem</i>	<b>146</b>
<i>Background Information</i>	<b>146</b>
<i>Solution</i>	<b>147</b>
<i>How It Works</i>	<b>147</b>
<i>Comparing Tables</i>	<b>148</b>
<i>Problem</i>	<b>148</b>
<i>Background Information</i>	<b>148</b>
<i>Solution</i>	<b>149</b>
<i>How It Works</i>	<b>149</b>
<i>Overlaying Missing Data Values</i>	<b>150</b>
<i>Problem</i>	<b>150</b>
<i>Background Information</i>	<b>150</b>
<i>Solution</i>	<b>150</b>
<i>How It Works</i>	<b>151</b>
<i>Computing Percentages within Subtotals</i>	<b>152</b>
<i>Problem</i>	<b>152</b>
<i>Background Information</i>	<b>152</b>
<i>Solution</i>	<b>152</b>
<i>How It Works</i>	<b>153</b>
<i>Counting Duplicate Rows in a Table</i>	<b>153</b>
<i>Problem</i>	<b>153</b>
<i>Background Information</i>	<b>153</b>
<i>Solution</i>	<b>154</b>
<i>How It Works</i>	<b>154</b>
<i>Expanding Hierarchical Data in a Table</i>	<b>155</b>
<i>Problem</i>	<b>155</b>
<i>Background Information</i>	<b>155</b>
<i>Solution</i>	<b>155</b>
<i>How It Works</i>	<b>156</b>
<i>Summarizing Data in Multiple Columns</i>	<b>157</b>
<i>Problem</i>	<b>157</b>
<i>Background Information</i>	<b>157</b>
<i>Solution</i>	<b>157</b>
<i>How It Works</i>	<b>158</b>
<i>Creating a Summary Report</i>	<b>158</b>
<i>Problem</i>	<b>158</b>
<i>Background Information</i>	<b>158</b>
<i>Solution</i>	<b>159</b>
<i>How It Works</i>	<b>160</b>

<i>Creating a Customized Sort Order</i>	161
<i>Problem</i>	161
<i>Background Information</i>	161
<i>Solution</i>	161
<i>How It Works</i>	162
<i>Conditionally Updating a Table</i>	163
<i>Problem</i>	163
<i>Background Information</i>	163
<i>Solution</i>	163
<i>How It Works</i>	164
<i>Updating a Table with Values from Another Table</i>	165
<i>Problem</i>	165
<i>Background Information</i>	165
<i>Solution</i>	166
<i>How It Works</i>	167
<i>Creating and Using Macro Variables</i>	167
<i>Problem</i>	167
<i>Background Information</i>	167
<i>Solution</i>	167
<i>How It Works</i>	170
<i>Using PROC SQL Tables in Other SAS Procedures</i>	170
<i>Problem</i>	170
<i>Background Information</i>	170
<i>Solution</i>	171
<i>How It Works</i>	173

---

## Overview

This section shows you examples of solutions that PROC SQL can provide. Each example includes a statement of the problem to solve, background information that you must know to solve the problem, the PROC SQL solution code, and an explanation of how the solution works.

---

## Computing a Weighted Average

---

### Problem

You want to compute a weighted average of a column of values.

---

### Background Information

There is one input table, called *Sample*, that contains the following data:

**Output 6.1** Sample Input Table for Weighted Averages

Sample Data for Weighted Average				
Obs	Value	Weight	Gender	
1	2893.35	9.0868	F	
2	56.13	26.2171	M	
3	901.43	-4.0605	F	
4	2942.68	-5.6557	M	
5	621.16	24.3306	F	
6	361.50	13.8971	M	
7	2575.09	29.3734	F	
8	2157.07	7.0687	M	
9	690.73	-40.1271	F	
10	2085.80	24.4795	M	

Note that some of the weights are negative.

**Solution**

Use the following PROC SQL code to obtain weighted averages that are shown in the following output:

```
proc sql;
  title 'Weighted Averages from Sample Data';
  select Gender, sum(Value*Weight)/sum(Weight) as WeightedAverage
    from (select Gender, Value,
               case
                 when Weight gt 0 then Weight
                 else 0
               end as Weight
           from Sample)
  group by Gender;
```

**Output 6.2** PROC SQL Output for Weighted Averages

Weighted Averages from Sample Data		
Gender	Weighted Average	
	-----	
F	1864.026	
M	1015.91	

**How It Works**

This solution uses an in-line view to create a temporary table that eliminates the negative data values in the Weight column. The in-line view is a query that

- selects the Gender and Value columns.

- uses a CASE expression to select the value from the Weight column. If Weight is greater than zero, then it is retrieved; if Weight is less than zero, then a value of zero is used in place of the Weight value.

```
(select Gender, Value,
      case
        when Weight>0 then Weight
        else 0
      end as Weight
from Sample)
```

The first, or outer, SELECT statement in the query

- selects the Gender column
- constructs a weighted average from the results that were retrieved by the in-line view.

The weighted average is the sum of the products of Value and Weight divided by the sum of the Weights.

```
select Gender, sum(Value*Weight)/sum(Weight) as WeightedAverage
```

Finally, the query uses a GROUP BY clause to combine the data so that the calculation is performed for each gender.

```
group by Gender;
```

---

## Comparing Tables

---

### Problem

You have two copies of a table. One of the copies has been updated. You want to see which rows have been changed.

---

### Background Information

There are two tables, the OLDSTAFF table and NEWSTAFF table. The NEWSTAFF table is a copy of OLDSTAFF. Changes have been made to NEWSTAFF. You want to find out what changes have been made.

**Output 6.3** Sample Input Tables for Table Comparison

Old Staff Table					
id	Last	First	Middle	Phone	Location
5463	Olsen	Mary	K.	661-0012	R2342
6574	Hogan	Terence	H.	661-3243	R4456
7896	Bridges	Georgina	W.	661-8897	S2988
4352	Anson	Sanford		661-4432	S3412
5674	Leach	Archie	G.	661-4328	S3533
7902	Wilson	Fran	R.	661-8332	R4454
0001	Singleton	Adam	O.	661-0980	R4457
9786	Thompson	Jack		661-6781	R2343



New Staff Table					
id	Last	First	Middle	Phone	Location
5463	Olsen	Mary	K.	661-0012	R2342
6574	Hogan	Terence	H.	661-3243	R4456
7896	Bridges	Georgina	W.	661-2231	S2987
4352	Anson	Sanford		661-4432	S3412
5674	Leach	Archie	G.	661-4328	S3533
7902	Wilson	Fran	R.	661-8332	R4454
0001	Singleton	Adam	O.	661-0980	R4457
9786	Thompson	John	C.	661-6781	R2343
2123	Chen	Bill	W.	661-8099	R4432

## Solution

To display only the rows that have changed in the new version of the table, use the EXCEPT set operator between two SELECT statements.

```
proc sql;
  title 'Updated Rows';
  select * from newstaff
  except
  select * from oldstaff;
```

### Output 6.4 Rows That Have Changed

Updated Rows					
id	Last	First	Middle	Phone	Location
2123	Chen	Bill	W.	661-8099	R4432
7896	Bridges	Georgina	W.	661-2231	S2987
9786	Thompson	John	C.	661-6781	R2343

## How It Works

The EXCEPT operator returns rows from the first query that are not part of the second query. In this example, the EXCEPT operator displays only the rows that have been added or changed in the NEWSTAFF table.

*Note:* Any rows that were deleted from OLDSTAFF will not appear. △

## Overlaying Missing Data Values

### Problem

You are forming teams for a new league by analyzing the averages of bowlers when they were members of other bowling leagues. When possible you will use each bowler's most recent league average. However, if a bowler was not in a league last year, then you will use the bowler's average from the prior year.

### Background Information

There are two tables, LEAGUE1 and LEAGUE2, that contain bowling averages for last year and the prior year respectively. The structure of the tables is not identical because the data was compiled by two different secretaries. However, the tables do contain essentially the same type of data.

**Output 6.5** Sample Input Tables for Overlaying Missing Values

Bowling Averages from League1		
Fullname	Bowler	AvgScore
Alexander Delarge	4224	164
John T Chance	4425	.
Jack T Colton	4264	.
	1412	141
Andrew Shepherd	4189	185

Bowling Averages from League2			
FirstName	LastName	AMFNo	AvgScore
Alex	Delarge	4224	156
Mickey	Raymond	1412	.
		4264	174
Jack	Chance	4425	.
Patrick	O'Malley	4118	164

### Solution

The following PROC SQL code combines the information from two tables, LEAGUE1 and LEAGUE2. The program uses all the values from the LEAGUE1 table, if available, and replaces any missing values with the corresponding values from the LEAGUE2 table. The results are shown in the following output.

```
options nodate nonumber linesize=80 pagesize=60;

proc sql;
```

```

title "Averages from Last Year's League When Possible";
title2 "Supplemented when Available from Prior Year's League";
select coalesce(lastyr.fullname,trim(prioryr.firstname)
           ||' '||prioryr.lastname)as Name format=$26.,
       coalesce(lastyr.bowler,prioryr.amfno)as Bowler,
       coalesce(lastyr.avgscore,prioryr.avgscore)as Average format=8.
from league1 as lastyr full join league2 as prioryr
  on lastyr.bowler=prioryr.amfno
order by Bowler;

```

**Output 6.6** PROC SQL Output for Overlaying Missing Values

Averages from Last Year's League When Possible Supplemented when Available from Prior Year's League		
Name	Bowler	Average
-----		
Mickey Raymond	1412	141
Patrick O'Malley	4118	164
Andrew Shepherd	4189	185
Alexander Delarge	4224	164
Jack T Colton	4264	174
John T Chance	4425	.

**How It Works**

This solution uses a full join to obtain all rows from LEAGUE1 as well as all rows from LEAGUE2. The program uses the COALESCE function on each column so that, whenever possible, there is a value for each column of a row. Using the COALESCE function on a list of expressions that is enclosed in parentheses returns the first nonmissing value that is found. For each row, the following code returns the AvgScore column from LEAGUE1 for Average:

```
coalesce(lastyr.avgscore,prioryr.avgscore) as Average format=8.
```

If this value of AvgScore is missing, then COALESCE returns the AvgScore column from LEAGUE2 for Average. If this value of AvgScore is missing, then COALESCE returns a missing value for Average.

In the case of the Name column, the COALESCE function returns the value of FullName from LEAGUE1 if it exists. If not, then the value is obtained from LEAGUE2 by using both the TRIM function and concatenation operators to combine the first name and last name columns:

```
trim(prioryr.firstname)||' '||prioryr.lastname
```

Finally, the table is ordered by Bowler. The Bowler column is the result of the COALESCE function.

```
coalesce(lastyr.bowler,prioryr.amfno)as Bowler
```

Because the value is obtained from either table, you cannot confidently order the output by either the value of Bowler in LEAGUE1 or the value of AMFNo in LEAGUE 2, but only by the value that results from the COALESCE function.

---

## Computing Percentages within Subtotals

---

### Problem

You want to analyze answers to a survey question to determine how each state responded. Then you want to compute the percentage of each answer that a given state contributed. For example, what percentage of all NO responses came from North Carolina?

---

### Background Information

There is one input table, called SURVEY, that contains the following data (the first ten rows are shown):

**Output 6.7** Input Table for Computing Subtotal Percentages (Partial Output)

Sample Data for Subtotal Percentages		
Obs	State	Answer
1	NY	YES
2	NY	YES
3	NY	YES
4	NY	YES
5	NY	YES
6	NY	YES
7	NY	NO
8	NY	NO
9	NY	NO
10	NC	YES

---

### Solution

Use the following PROC SQL code to compute the subtotal percentages:

```
proc sql;
  title1 'Survey Responses';
  select survey.Answer, State, count(State) as Count,
         calculated Count/Subtotal as Percent format=percent8.2
  from survey,
       (select Answer, count(*) as Subtotal from survey
        group by Answer) as survey2
  where survey.Answer=survey2.Answer
  group by survey.Answer, State;
quit;
```

**Output 6.8** PROC SQL Output That Computes Percentages within Subtotals

Survey Responses			
Answer	State	Count	Percent
NO	NC	24	38.71%
NO	NY	3	4.84%
NO	PA	18	29.03%
NO	VA	17	27.42%
YES	NC	20	37.04%
YES	NY	6	11.11%
YES	PA	9	16.67%
YES	VA	19	35.19%

---

**How It Works**

This solution uses a subquery to calculate the subtotal counts for each answer. The code joins the result of the subquery with the original table and then uses the calculated state count as the numerator and the subtotal from the subquery as the denominator for the percentage calculation.

The query uses a GROUP BY clause to combine the data so that the calculation is performed for State within each answer.

```
group by survey.Answer, State;
```

---

**Counting Duplicate Rows in a Table**

---

**Problem**

You want to count the number of duplicate rows in a table and generate an output column that shows how many times each row occurs.

---

**Background Information**

There is one input table, called DUPLICATES, that contains the following data:

**Output 6.9** Sample Input Table for Counting Duplicates

Sample Data for Counting Duplicates					
Obs	LastName	First Name	City	State	
1	Smith	John	Richmond	Virginia	
2	Johnson	Mary	Miami	Florida	
3	Smith	John	Richmond	Virginia	
4	Reed	Sam	Portland	Oregon	
5	Davis	Karen	Chicago	Illinois	
6	Davis	Karen	Chicago	Illinois	
7	Thompson	Jennifer	Houston	Texas	
8	Smith	John	Richmond	Virginia	
9	Johnson	Mary	Miami	Florida	

**Solution**

Use the following PROC SQL code to count the duplicate rows:

```
proc sql;
  title 'Duplicate Rows in DUPLICATES Table';
  select *, count(*) as Count
  from Duplicates
  group by LastName, FirstName, City, State
  having count(*) > 1;
```

**Output 6.10** PROC SQL Output for Counting Duplicates

Duplicate Rows in DUPLICATES Table					
LastName	FirstName	City	State	Count	
Davis	Karen	Chicago	Illinois	2	
Johnson	Mary	Miami	Florida	2	
Smith	John	Richmond	Virginia	3	

**How It Works**

This solution uses a query that

- selects all columns
- counts all rows
- groups all of the rows in the Duplicates table by matching rows
- excludes the rows that have no duplicates.

*Note:* You must include all of the columns in your table in the GROUP BY clause to find exact duplicates.  $\triangle$

## Expanding Hierarchical Data in a Table

### Problem

You want to generate an output column that shows a hierarchical relationship among rows in a table.

### Background Information

There is one input table, called EMPLOYEES, that contains the following data:

**Output 6.11** Sample Input Table for Expanding a Hierarchy

Sample Data for Expanding a Hierarchy					
Obs	ID	LastName	First Name	Supervisor	
1	1001	Smith	John	1002	
2	1002	Johnson	Mary	None	
3	1003	Reed	Sam	None	
4	1004	Davis	Karen	1003	
5	1005	Thompson	Jennifer	1002	
6	1006	Peterson	George	1002	
7	1007	Jones	Sue	1003	
8	1008	Murphy	Janice	1003	
9	1009	Garcia	Joe	1002	

You want to create output that shows the full name and ID number of each employee who has a supervisor, along with the full name and ID number of that employee's supervisor.

### Solution

Use the following PROC SQL code to expand the data:

```
proc sql;
  title 'Expanded Employee and Supervisor Data';
  select A.ID label="Employee ID",
         trim(A.FirstName)||' '||A.LastName label="Employee Name",
         B.ID label="Supervisor ID",
         trim(B.FirstName)||' '||B.LastName label="Supervisor Name"
  from Employees A, Employees B
  where A.Supervisor=B.ID and A.Supervisor is not missing;
```

**Output 6.12** PROC SQL Output for Expanding a Hierarchy

Expanded Employee and Supervisor Data			
Employee ID	Employee Name	Supervisor ID	Supervisor Name
1001	John Smith	1002	Mary Johnson
1005	Jennifer Thompson	1002	Mary Johnson
1006	George Peterson	1002	Mary Johnson
1009	Joe Garcia	1002	Mary Johnson
1004	Karen Davis	1003	Sam Reed
1007	Sue Jones	1003	Sam Reed
1008	Janice Murphy	1003	Sam Reed

**How It Works**

This solution uses a self-join (reflexive join) to match employees and their supervisors. The SELECT clause assigns aliases of A and B to two instances of the same table and retrieves data from each instance. From instance A, the SELECT clause

- selects the ID column and assigns it a label of **Employee ID**
- selects and concatenates the FirstName and LastName columns into one output column and assigns it a label of **Employee Name**.

From instance B, the SELECT clause

- selects the ID column and assigns it a label of **Supervisor ID**
- selects and concatenates the FirstName and LastName columns into one output column and assigns it a label of **Supervisor Name**.

In both concatenations, the SELECT clause uses the TRIM function to remove trailing spaces from the data in the FirstName column, and then concatenates the data with a single space and the data in the LastName column to produce a single character value for each full name.

```
trim(A.FirstName)||' '|A.LastName label="Employee Name"
```

When PROC SQL applies the WHERE clause, the two table instances are joined. The WHERE clause conditions restrict the output to only those rows in table A that have a supervisor ID that matches an employee ID in table B. This operation provides a supervisor ID and full name for each employee in the original table, except for those who do not have a supervisor.

```
where A.Supervisor=B.ID and A.Supervisor is not missing;
```

*Note:* Although there are no missing values in the Employees table, you should check for and exclude missing values from your results to avoid unexpected results. For example, if there were an employee with a blank supervisor ID number and an employee with a blank ID, then they would produce an erroneous match in the results.  $\Delta$



---

## Summarizing Data in Multiple Columns

---

### Problem

You want to produce a grand total of multiple columns in a table.

---

### Background Information

There is one input table, called SALES, that contains the following data:

**Output 6.13** Sample Input Table for Summarizing Data from Multiple Columns

Sample Data for Summarizing Data from Multiple Columns				
Obs	Salesperson	January	February	March
1	Smith	1000	650	800
2	Johnson	0	900	900
3	Reed	1200	700	850
4	Davis	1050	900	1000
5	Thompson	750	850	1000
6	Peterson	900	600	500
7	Jones	800	900	1200
8	Murphy	700	800	700
9	Garcia	400	1200	1150

You want to create output that shows the total sales for each month and the total sales for all three months.

---

### Solution

Use the following PROC SQL code to produce the monthly totals and grand total:

```
proc sql;
  title 'Total First Quarter Sales';
  select sum(January) as JanTotal,
         sum(February) as FebTotal,
         sum(March) as MarTotal,
         sum(calculated JanTotal, calculated FebTotal,
             calculated MarTotal) as GrandTotal format=dollar10.
  from Sales;
```

**Output 6.14** PROC SQL Output for Summarizing Data from Multiple Columns

Total First Quarter Sales			
JanTotal	FebTotal	MarTotal	GrandTotal
6800	7500	8100	\$22,400

**How It Works**

Recall that when you specify one column as the argument to an aggregate function, the values in that column are calculated. When you specify multiple columns, the values in each row of the columns are calculated. This solution uses the SUM function to calculate the sum of each month's sales, and then uses the SUM function a second time to total the monthly sums into one grand total.

```
sum(calculated JanTotal, calculated FebTotal,
    calculated MarTotal) as GrandTotal format=dollar10.
```

An alternative way to code the grand total calculation is to use nested functions:

```
sum(sum(January), sum(February), sum(March))
    as GrandTotal format=dollar10.
```

**Creating a Summary Report****Problem**

You have a table that contains detailed sales information. You want to produce a summary report from the detail table.

**Background Information**

There is one input table, called SALES, that contains detailed sales information. There is one record for each sale for the first quarter that shows the site, product, invoice number, invoice amount, and invoice date.

**Output 6.15** Sample Input Table for Creating a Summary Report

Sample Data to Create Summary Sales Report				
Site	Product	Invoice	Invoice Amount	InvoiceDate
V1009	VID010	V7679	598.5	980126
V1019	VID010	V7688	598.5	980126
V1032	VID005	V7771	1070	980309
V1043	VID014	V7780	1070	980309
V421	VID003	V7831	2000	980330
V421	VID010	V7832	750	980330
V570	VID003	V7762	2000	980302
V659	VID003	V7730	1000	980223
V783	VID003	V7815	750	980323
V985	VID003	V7733	2500	980223
V966	VID001	V5020	1167	980215
V98	VID003	V7750	2000	980223

You want to use this table to create a summary report that shows the sales for each product for each month of the quarter.

**Solution**

Use the following PROC SQL code to create a column for each month of the quarter, and use the summary function SUM in combination with the GROUP BY statement to accumulate the monthly sales for each product:

```
proc sql;
  title 'First Quarter Sales by Product';
  select Product,
         sum(Jan) label='Jan',
         sum(Feb) label='Feb',
         sum(Mar) label='Mar'
  from (select Product,
              case
                when substr(InvoiceDate,3,2)='01' then
                  InvoiceAmount end as Jan,
              case
                when substr(InvoiceDate,3,2)='02' then
                  InvoiceAmount end as Feb,
              case
                when substr(InvoiceDate,3,2)='03' then
                  InvoiceAmount end as Mar
              from work.sales)
  group by Product;
```

**Output 6.16** PROC SQL Output for a Summary Report

First Quarter Sales by Product			
Product	Jan	Feb	Mar
VID001	.	1167	.
VID003	.	5500	4750
VID005	.	.	1070
VID010	1197	.	750
VID014	.	.	1070

*Note:* Missing values in the matrix indicate that no sales occurred for that given product in that month.  $\triangle$

---

## How It Works

This solution uses an in-line view to create three temporary columns, Jan, Feb, and Mar, based on the month part of the invoice date column. The in-line view is a query that

- selects the product column
- uses a CASE expression to assign the value of invoice amount to one of three columns, Jan, Feb, or Mar, depending upon the value of the month part of the invoice date column.

```

case
  when substr(InvoiceDate,3,2)='01' then
    InvoiceAmount end as Jan,
case
  when substr(InvoiceDate,3,2)='02' then
    InvoiceAmount end as Feb,
case
  when substr(InvoiceDate,3,2)='03' then
    InvoiceAmount end as Mar

```

The first, or outer, SELECT statement in the query

- selects the product
- uses the summary function SUM to accumulate the Jan, Feb, and Mar amounts
- uses the GROUP BY statement to produce a line in the table for each product.

Notice that dates are stored in the input table as strings. If the dates were stored as SAS dates, then the CASE expression could be written as follows:

```

case
  when month(InvoiceDate)=1 then
    InvoiceAmount end as Jan,
case
  when month(InvoiceDate)=2 then
    InvoiceAmount end as Feb,
case
  when month(InvoiceDate)=3 then
    InvoiceAmount end as Mar

```

## Creating a Customized Sort Order

### Problem

You want to sort data in a logical, but not alphabetical, sequence.

### Background Information

There is one input table, called CHORES, that contains the following data:

**Output 6.17** Sample Input Data for a Customized Sort

Garden Chores		
Project	Hours	Season
weeding	48	summer
pruning	12	winter
mowing	36	summer
mulching	17	fall
raking	24	fall
raking	16	spring
planting	8	spring
planting	8	fall
sweeping	3	winter
edging	16	summer
seeding	6	spring
tilling	12	spring
aerating	6	spring
feeding	7	summer
rolling	4	winter

You want to reorder this chore list so that all the chores are grouped by season, starting with spring and progressing through the year. Simply ordering by Season makes the list appear in alphabetical sequence: fall, spring, summer, winter.

### Solution

Use the following PROC SQL code to create a new column, Sorter, that will have values of 1 through 4 for the seasons spring through winter. Use the new column to order the query, but do not select it to appear:

```
options nodate nonumber linesize=80 pagesize=60;

proc sql;
  title 'Garden Chores by Season in Logical Order';
  select Project, Hours, Season
  from (select Project, Hours, Season,
  case
    when Season = 'spring' then 1
    when Season = 'summer' then 2
```

```

        when Season = 'fall' then 3
        when Season = 'winter' then 4
        else .
    end as Sorter
    from chores)
order by Sorter;

```

**Output 6.18** PROC SQL Output for a Customized Sort Sequence

Garden Chores by Season in Logical Order		
Project	Hours	Season
tilling	12	spring
raking	16	spring
planting	8	spring
seeding	6	spring
aerating	6	spring
mowing	36	summer
feeding	7	summer
edging	16	summer
weeding	48	summer
raking	24	fall
mulching	17	fall
planting	8	fall
rolling	4	winter
pruning	12	winter
sweeping	3	winter

## How It Works

This solution uses an in-line view to create a temporary column that can be used as an ORDER BY column. The in-line view is a query that

- selects the Project, Hours, and Season columns
- uses a CASE expression to remap the seasons to the new column Sorter: spring to 1, summer to 2, fall to 3, and winter to 4.

```

(select project, hours, season,
     case
         when season = 'spring' then 1
         when season = 'summer' then 2
         when season = 'fall' then 3
         when season = 'winter' then 4
         else .
     end as sorter
    from chores)

```

The first, or outer, SELECT statement in the query

- selects the Project, Hours and Season columns
- orders rows by the values that were assigned to the seasons in the Sorter column that was created with the in-line view.

Notice that the Sorter column is not included in the SELECT statement. That causes a note to be written to the log indicating that you have used a column in an ORDER BY statement that does not appear in the SELECT statement. In this case, that is exactly what you wanted to do.

## Conditionally Updating a Table

### Problem

You want to update values in a column of a table, based on the values of several other columns in the table.

### Background Information

There is one table, called INCENTIVES, that contains information on sales data. There is one record for each salesperson that includes a department code, a base pay rate, and sales of two products, gadgets and whatnots.

#### Output 6.19 Sample Input Data to Conditionally Change a Table

Sales Data for Incentives Program				
Name	Department	Payrate	Gadgets	Whatnots
Lao Che	M2	8	10193	1105
Jack Colton	U2	6	9994	2710
Mickey Raymond	M1	12	6103	1930
Dean Proffitt	M2	11	3000	1999
Antoinette Lily	E1	20	2203	4610
Sydney Wade	E2	15	4205	3010
Alan Traherne	U2	4	5020	3000
Elizabeth Bennett	E1	16	17003	3003

You want to update the table by increasing each salesperson's payrate (based on the total sales of gadgets and whatnots) and taking into consideration some factors that are based on department code.

Specifically, anyone who sells over 10,000 gadgets merits an extra \$5 per hour. Anyone selling between 5,000 and 10,000 gadgets also merits an incentive pay, but E Department salespersons are expected to be better sellers than those in the other departments, so their gadget sales incentive is \$2 per hour compared to \$3 per hour for those in other departments. Good sales of whatnots also entitle sellers to added incentive pay. The algorithm for whatnot sales is that the top level (level 1 in each department) salespersons merit an extra \$.50 per hour for whatnot sales over 2,000, and level 2 salespersons merit an extra \$1 per hour for sales over 2,000.

### Solution

Use the following PROC SQL code to create a new value for the Payrate column. Actually Payrate is updated twice for each row, once based on sales of gadgets, and again based on sales of whatnots:

```
proc sql;
  update incentives
  set payrate = case
```

```

        when gadgets > 10000 then
            payrate + 5.00
        when gadgets > 5000 then
            case
                when department in ('E1', 'E2') then
                    payrate + 2.00
                else payrate + 3.00
            end
        else payrate
    end;
update incentives
set payrate = case
    when whatnots > 2000 then
        case
            when department in ('E2', 'M2', 'U2') then
                payrate + 1.00
            else payrate + 0.50
        end
    else payrate
end;
title 'Adjusted Payrates Based on Sales of Gadgets and Whatnots';
select * from incentives;

```

**Output 6.20** PROC SQL Output for Conditionally Updating a Table

Adjusted Payrates Based on Sales of Gadgets and Whatnots				
Name	Department	Payrate	Gadgets	Whatnots
Lao Che	M2	13	10193	1105
Jack Colton	U2	10	9994	2710
Mickey Raymond	M1	15	6103	1930
Dean Proffit	M2	11	3000	1999
Antoinette Lily	E1	20.5	2203	4610
Sydney Wade	E2	16	4205	3010
Alan Traherne	U2	8	5020	3000
Elizabeth Bennett	E1	21.5	17003	3003

## How It Works

This solution performs consecutive updates to the payrate column of the incentive table. The first update uses a nested case expression, first determining a bracket that is based on the amount of gadget sales: greater than 10,000 calls for an incentive of \$5, between 5,000 and 10,000 requires an additional comparison. That is accomplished with a nested case expression that checks department code to choose between a \$2 and \$3 incentive.

```

update incentives
set payrate = case
    when gadgets > 10000 then
        payrate + 5.00
    when gadgets > 5000 then
        case

```



```
        when department in ('E1', 'E2') then
            payrate + 2.00
        else payrate + 3.00
    end
else payrate
end;
```

The second update is similar, though simpler. All sales of whatnots over 2,000 merit an incentive, either \$.50 or \$1 depending on the department level, that again is accomplished by means of a nested case expression.

```
update incentives
  set payrate = case
      when whatnots > 2000 then
          case
              when department in ('E2', 'M2', 'U2') then
                  payrate + 1.00
              else payrate + 0.50
          end
      else payrate
  end;
```

---

## Updating a Table with Values from Another Table

---

### Problem

You want to update the SQL.UNITEDSTATES table with updated population data.

---

### Background Information

The SQL.NEWPOP table contains updated population data for some of the U.S. states.

**Output 6.21** Table with Updated Population Data

Updated U.S. Population Data	
state	Population
Texas	20,851,820
Georgia	8,186,453
Washington	5,894,121
Arizona	5,130,632
Alabama	4,447,100
Oklahoma	3,450,654
Connecticut	3,405,565
Iowa	2,926,324
West Virginia	1,808,344
Idaho	1,293,953
Maine	1,274,923
New Hampshire	1,235,786
North Dakota	642,200
Alaska	626,932

## Solution

Use the following PROC SQL code to update the population information for each state in the SQL.UNITEDSTATES table:

```
proc sql;
title 'UNITEDSTATES';
update sql.unitedstates as u
  set population=(select population from sql.newpop as n
  where u.name=n.state)
  where u.name in (select state from sql.newpop);
select Name format=$17., Capital format=$15.,
  Population, Area, Continent format=$13., Statehood format=date9.
  from sql.unitedstates;
```

**Output 6.22** SQL.UNITEDSTATES with Updated Population Data (Partial Output)

UNITEDSTATES					
Name	Capital	Population	Area	Continent	Statehood
Alabama	Montgomery	4447100	52423	North America	14DEC1819
Alaska	Juneau	626932	656400	North America	03JAN1959
Arizona	Phoenix	5130632	114000	North America	14FEB1912
Arkansas	Little Rock	2447996	53200	North America	15JUN1836
California	Sacramento	31518948	163700	North America	09SEP1850
Colorado	Denver	3601298	104100	North America	01AUG1876
Connecticut	Hartford	3405565	5500	North America	09JAN1788
Delaware	Dover	707232	2500	North America	07DEC1787
District of Colum	Washington	612907	100	North America	21FEB1871
Florida	Tallahassee	13814408	65800	North America	03MAR1845

## How It Works

The UPDATE statement updates values in the SQL.UNITEDSTATES table (here with the alias U). For each row in the SQL.UNITEDSTATES table, the in-line view in the SET clause returns a single value. For rows that have a corresponding row in SQL.NEWPOP, this value is the value of the Population column from SQL.NEWPOP. For rows that do not have a corresponding row in SQL.NEWPOP, this value is missing. In both cases, the returned value is assigned to the Population column.

The WHERE clause ensures that only the rows in SQL.UNITEDSTATES that have a corresponding row in SQL.NEWPOP are updated, by checking each value of Name against the list of state names that is returned from the in-line view. Without the WHERE clause, rows that do not have a corresponding row in SQL.NEWPOP would have their Population values updated to missing.

---

## Creating and Using Macro Variables

---

### Problem

You want to create a separate data set for each unique value of a column.

---

### Background Information

The SQL.FEATURES data set contains information on various geographical features around the world.

**Output 6.23** FEATURES (Partial Output)

FEATURES						
Name	Type	Location	Area	Height	Depth	Length
Aconcagua	Mountain	Argentina	.	22834	.	.
Amazon	River	South America	.	.	.	4000
Amur	River	Asia	.	.	.	2700
Andaman	Sea		218100	.	3667	.
Angel Falls	Waterfall	Venezuela	.	3212	.	.
Annapurna	Mountain	Nepal	.	26504	.	.
Aral Sea	Lake	Asia	25300	.	222	.
Ararat	Mountain	Turkey	.	16804	.	.
Arctic	Ocean		5105700	.	17880	.
Atlantic	Ocean		33420000	.	28374	.

---

### Solution

To create a separate data set for each type of feature, you could go through the data set manually to determine all the unique values of Type, and then write a separate DATA step for each type (or a single DATA step with multiple OUTPUT statements).

This approach is labor-intensive, error-prone, and impractical for large data sets. The following PROC SQL code counts the unique values of Type and puts each value in a separate macro variable. The SAS macro that follows the PROC SQL code uses these macro variables to create a SAS data set for each value. You do not need to know beforehand how many unique values there are or what the values are.

```
proc sql noprint;
  select count(distinct type)
    into :n
    from sql.features;
  select distinct type
    into :type1 - :type%left(&n)
    from sql.features;
quit;

%macro maked;
  %do i=1 %to &n;
    data &&type&i (drop=type);
      set sql.features;
      if type="&&type&i";
    run;
  %end;
%mend maked;
%maked;
```

## Output 6.24 Log

```

240 proc sql noprint;
241   select count(distinct type)
242     into :n
243     from sql.features;
244   select distinct type
245     into :type1 - :type%left(&n)
246     from sql.features;
247 quit;
NOTE: PROCEDURE SQL used (Total process time):
      real time          0.04 seconds
      cpu time           0.03 seconds

248
249 %macro makeds;
250   %do i=1 %to &n;
251     data &&type&i (drop=type);
252       set sql.features;
253       if type="&&type&i";
254     run;
255   %end;
256 %mend makeds;
257 %makeds;
NOTE: There were 74 observations read from the data set SQL.FEATURES.
NOTE: The data set WORK.DESERT has 7 observations and 6 variables.
NOTE: DATA statement used (Total process time):
      real time          1.14 seconds
      cpu time           0.41 seconds

NOTE: There were 74 observations read from the data set SQL.FEATURES.
NOTE: The data set WORK.ISLAND has 6 observations and 6 variables.
NOTE: DATA statement used (Total process time):
      real time          0.02 seconds
      cpu time           0.00 seconds

NOTE: There were 74 observations read from the data set SQL.FEATURES.
NOTE: The data set WORK.LAKE has 10 observations and 6 variables.
NOTE: DATA statement used (Total process time):
      real time          0.01 seconds
      cpu time           0.01 seconds

NOTE: There were 74 observations read from the data set SQL.FEATURES.
NOTE: The data set WORK.MOUNTAIN has 18 observations and 6 variables.
NOTE: DATA statement used (Total process time):
      real time          0.02 seconds
      cpu time           0.01 seconds

NOTE: There were 74 observations read from the data set SQL.FEATURES.
NOTE: The data set WORK.OCEAN has 4 observations and 6 variables.
NOTE: DATA statement used (Total process time):
      real time          0.01 seconds
      cpu time           0.01 seconds

NOTE: There were 74 observations read from the data set SQL.FEATURES.
NOTE: The data set WORK.RIVER has 12 observations and 6 variables.
NOTE: DATA statement used (Total process time):
      real time          0.02 seconds
      cpu time           0.02 seconds

NOTE: There were 74 observations read from the data set SQL.FEATURES.
NOTE: The data set WORK.SEA has 13 observations and 6 variables.
NOTE: DATA statement used (Total process time):
      real time          0.03 seconds
      cpu time           0.02 seconds

NOTE: There were 74 observations read from the data set SQL.FEATURES.
NOTE: The data set WORK.WATERFALL has 4 observations and 6 variables.
NOTE: DATA statement used (Total process time):
      real time          0.02 seconds
      cpu time           0.02 seconds

```

---

## How It Works

This solution uses the INTO clause to store values in macro variables. The first SELECT statement counts the unique variables and stores the result in macro variable N. The second SELECT statement creates a range of macro variables, one for each unique value, and stores each unique value in one of the macro variables. Note the use of the %LEFT function, which trims leading blanks from the value of the N macro variable.

The MAKEDS macro uses all the macro variables that were created in the PROC SQL step. The macro uses a %DO loop to execute a DATA step for each unique value, writing rows that contain a given value of Type to a SAS data set of the same name. The Type variable is dropped from the output data sets.

For more information about SAS macros, see *SAS Macro Language: Reference*.

---

## Using PROC SQL Tables in Other SAS Procedures

---

### Problem

You want to show the average high temperatures in degrees Celsius for European countries on a map.

---

### Background Information

The SQL.WORLDTEMPS table has average high and low temperatures for various cities around the world.

**Output 6.25** WORLDTEMPS (Partial Output)

WORLDTEMPS			
City	Country	AvgHigh	AvgLow
Algiers	Algeria	90	45
Amsterdam	Netherlands	70	33
Athens	Greece	89	41
Auckland	New Zealand	75	44
Bangkok	Thailand	95	69
Beijing	China	86	17
Belgrade	Yugoslavia	80	29
Berlin	Germany	75	25
Bogota	Colombia	69	43
Bombay	India	90	68

---

## Solution

Use the following PROC SQL and PROC GMAP code to produce the map. You must license SAS/GRAPH software to use PROC GMAP.

```
options fmtsearch=(sashelp.mapfmts);

proc sql;
  create table extremetemps as
  select country, round((mean(avgHigh)-32)/1.8) as High,
         input(put(country,$glcsmn.), best.) as ID
  from sql.worldtemps
  where calculated id is not missing and country in
        (select name from sql.countries where continent='Europe')
  group by country;
quit;

proc gmap map=maps.europe data=extremetemps all;
  id id;
  block high / levels=3;
  title 'Average High Temperatures for European Countries';
  title2 'Degrees Celsius';
run;
quit;
```

Figure 6.1 PROC GMAP Output

### Average High Temperatures for European Countries Degrees Celsius





---

## How It Works

The SAS system option `FMTSEARCH=` tells SAS to search in the `SASHELP.MAPFMTS` catalog for map-related formats. In the `PROC SQL` step, a temporary table is created with `Country`, `High`, and `ID` columns. The calculation `round((mean(avgHigh)-32)/1.8)` does the following:

- 1 For countries that are represented by more than one city, the mean of the cities' average high temperatures is used for that country.
- 2 That value is converted from degrees Fahrenheit to degrees Celsius.
- 3 The result is rounded to the nearest degree.


The `PUT` function uses the `$GLCSMN.` format to convert the country name to a country code. The `INPUT` function converts this country code, which is returned by the `PUT` function as a character value, into a numeric value that can be understood by the `GMAP` procedure. See *SAS Language Reference: Dictionary* for details about the `PUT` and `INPUT` functions.

The `WHERE` clause limits the output to European countries by checking the value of the `Country` column against the list of European countries that is returned by the in-line view. Also, rows with missing values of `ID` are eliminated. Missing `ID` values could be produced if the `$GLCSMN.` format does not recognize the country name.

The `GROUP BY` clause is required so that the mean temperature can be calculated for each country rather than for the entire table.

The `PROC GMAP` step uses the `ID` variable to identify each country and places a block representing the `High` value on each country on the map. The `ALL` option ensures that countries (such as the United Kingdom in this example) that do not have `High` values are also drawn on the map. In the `BLOCK` statement, the `LEVELS=` option specifies how many response levels are used in the graph. For more information about the `GMAP` procedure, see *SAS/GRAPH: Reference*.



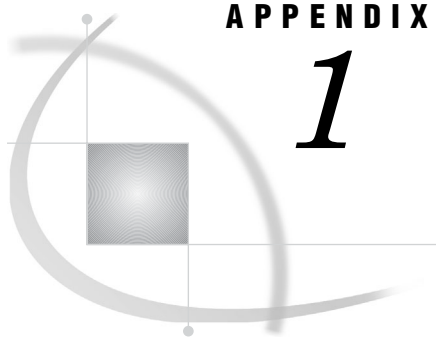

## Recommended Reading

---

*Recommended Reading* 175

---

### Recommended Reading

Here is the recommended reading list for this title:

- *Base SAS Procedures Guide*
- *Cody's Data Cleaning Techniques Using SAS Software*
- *Combining and Modifying SAS Data Sets: Examples*
- *SAS/GRAPH: Reference*
- *SAS Language Reference: Concepts*
- *SAS Language Reference: Dictionary*
- *SAS Macro Language: Reference*

For a complete list of SAS publications, go to [support.sas.com/bookstore](http://support.sas.com/bookstore). If you have questions about which titles you need, please contact a SAS Publishing Sales Representative at:

SAS Publishing Sales  
SAS Campus Drive  
Cary, NC 27513  
Telephone: 1-800-727-3228  
Fax: 1-919-531-9439  
E-mail: [sasbook@sas.com](mailto:sasbook@sas.com)  
Web address: [support.sas.com/bookstore](http://support.sas.com/bookstore)

Customers outside the United States and Canada, please contact your local SAS office for assistance.



# Glossary

---

**calculated column**

in a query, a column that does not exist in any of the tables that are being queried, but which is created as a result of a column expression. See also column expression.

**Cartesian product**

a type of join that matches each row from each joined table to each row from all other joined tables. See also cross join and join.

**column**

in relational databases, a vertical component of a table. Each column has a unique name, contains data of a specific type, and has certain attributes. A column is analogous to a variable in SAS terminology.

**column alias**

a temporary, alternate name for a column. Aliases are optional and can be specified in the SQL procedure's SELECT clause to name or rename columns. An alias is one word. See also column.

**column expression**

a set of operators and operands that, when evaluated, result in a single data value. The resulting data value can be either a character value or a numeric value.

**composite index**

an index that locates observations in a SAS data set by examining the values of two or more key variables. See also index and simple index.

**condition**

in the SQL procedure, the part of the WHERE clause that contains the search criteria. In the condition, you specify which rows are to be retrieved.

**cross join**

a type of join that returns the product of joined tables. A cross join is functionally the same as a Cartesian product. See also Cartesian product and join.

**DISTINCT**

a keyword that causes the SQL procedure to remove duplicate rows from the output.

**equijoin**

a kind of join in the SQL procedure. For example, when two tables are joined in an equijoin, the value of a column in the first table must equal the value of the column in the second table in the SQL expression. See also join.

**group**

in the SQL procedure, a set of rows that all have the same combination of values for the columns that are specified in a GROUP BY clause.

**index**

in SAS software, a component of a SAS data set that contains the data values of a key variable or variables, paired with a location identifier for the observation that contains the value. The value/identifier pairs are ordered in a structure that enables SAS to search by a value of a variable. See also composite index and simple index.

**in-line view**

a query-expression that is nested in the SQL procedure's FROM clause. An in-line view produces a table internally that the outer query uses to select data. You save a programming step when you use an in-line view, because instead of creating a view and then referring to it in another query, you can specify the view in-line in the FROM clause. An in-line view can be referenced only in the query (or statement) in which it is defined. See also query-expression.

**inner join**

See join.

**integrity constraints**

a set of data validation rules that you can specify in order to restrict the data values that can be stored for a variable in a SAS data file. Integrity constraints help you preserve the validity and consistency of your data.

**join**

in the SQL procedure, the combination of data from two or more tables (or from two or more SAS data views) to produce a single result table. A conventional join, which is often called an inner join, returns a result table for all the rows in one table that have one or more matching rows in the other table or tables. See also outer join.

**join criteria**

the set of parameters that determine how tables are to be joined. Join criteria are usually specified in a WHERE expression or in an SQL ON clause. See also join and outer join.

**missing value**

in SAS, a term that describes the contents of a variable that contains no data for a particular row (or observation). By default, SAS prints or displays a missing numeric value as a single period, and it prints or displays a missing character value as a blank space. In the SQL procedure, a missing value is equivalent to an SQL NULL value.

**natural join**

a type of join that returns selected rows from tables in which one or more columns in each table have the same name and the same data type and contain the same value. See also join.

**outer join**

in the SQL procedure, an inner join that is augmented with rows that do not match any row from the other table or tables in the join. There are three kinds of outer joins: left, right, and full. See also join.

**PROC SQL view**

a SAS data set that is created by the SQL procedure. A PROC SQL view contains no data. Instead, it stores information that enables it to read data values from other files, which can include SAS data files, SAS/ACCESS views, DATA step views, or other PROC SQL views. The output of a PROC SQL view can be either a subset or a superset of one or more files. See also SAS data view.

**query**

a set of instructions that requests particular information from one or more data sources.

**query-expression**

in PROC SQL, one or more table-expressions that can be linked with set operators. The primary purpose of a query-expression is to retrieve data from tables, PROC SQL views, or SAS/ACCESS views. In PROC SQL, the SELECT statement is contained in a query-expression.

**row**

in relational database management systems, the horizontal component of a table. A row is analogous to a SAS observation.

**SAS data file**

a type of SAS data set that contains data values and descriptor information that is associated with the data. The descriptor information includes the data types and lengths of the variables as well as the name of the engine that was used to create the data. A PROC SQL table is a SAS data file. See also SAS data set and SAS data view.

**SAS data set**

a file whose contents are in one of the native SAS file formats. There are two types of SAS data sets: SAS data files and SAS data views. SAS data files contain data values in addition to descriptor information that is associated with the data. SAS data views contain only the descriptor information plus other information that is required for retrieving data values from other SAS data sets or from files that are stored in other software vendors' file formats.

**SAS data view**

a type of SAS data set that retrieves data values from other files. A SAS data view contains only descriptor information such as the data types and lengths of the variables (columns) plus other information that is required for retrieving data values from other SAS data sets or from files that are stored in other software vendors' file formats. SAS data views can be created by the SAS DATA step and by the SAS SQL procedure. See also SAS data set.

**simple index**

an index that uses the values of only one variable to locate observations. See also composite index and index.

**SQL (Structured Query Language)**

a standardized, high-level query language that is used in relational database management systems to create and manipulate objects in a database management system. SAS implements SQL through the SQL procedure.

**Structured Query Language**

See SQL (Structured Query Language),

**table**

in the SQL procedure, a SAS data file. See also SAS data file.

**union join**

a type of join that returns all rows with their respective values from each input table. Columns that do not exist in one table will have null (missing) values for those rows in the result table. See also join.

**view**

a generic term (used by many software vendors) for a definition of a virtual data set (or table). The definition is named and stored for later use. A view contains no data; it merely describes or defines data that is stored elsewhere.

**WHERE clause**

in the SQL procedure, the keyword WHERE followed by one or more WHERE expressions.

**WHERE expression**

a type of SAS expression that specifies a condition for selecting observations for processing by a DATA step or a PROC step. WHERE expressions can contain special operators that are not available in other SAS expressions. WHERE expressions can appear in a WHERE statement, a WHERE= data set option, a WHERE clause, or a WHERE command.



# Index

---

## A

abbreviating column names 58  
 aggregate functions 40  
   creating macro variables from result of 129  
   HAVING clause with 53  
   table of 40  
   using 40  
   with unique values 44  
 alias  
   assigning a column alias 20  
   referring to calculated columns by 21  
   table aliases 58  
 ALL keyword  
   set operators and 117  
 automatic macro variables 128, 133  
 averages, weighted 146

## B

BETWEEN-AND operators  
   retrieving rows 36  
 Boolean operators  
   retrieving rows 33

## C

calculated columns 19  
   assigning column alias to 20  
   referring to by alias 21  
   sorting by 28  
 Cartesian product 57  
   cross joins 68  
 CASE expression  
   assigning values conditionally 22  
 CASE-OPERAND form  
   assigning values conditionally 23  
 COALESCE function  
   in joins 70  
   replacing missing values 24  
 column alias 20  
   assigning to calculated columns 20  
   referring to calculated columns 21  
 column attributes  
   list of 17  
   specifying 24  
 column definitions  
   creating tables from 90

column headers  
   suppressing 19  
 column names  
   abbreviating 58  
   qualifying 58  
 columns 2  
   adding 99  
   altering 99  
   assigning values conditionally 21  
   calculating values 19  
   changing formats 100  
   changing informats 100  
   changing labels 100  
   changing width 100  
   creating 18  
   deleting 101  
   DICTIONARY.COLUMNS 125  
   grouping by multiple columns 48  
   grouping by one column 47  
   list of, with attributes 17  
   locating specific columns 125  
   modifying 100  
   multicolumn joins 62  
   renaming 100  
   replacing missing values 24  
   selecting 14  
   selecting all 14  
   selecting specific 15  
   sorting, with missing values 30  
   sorting by 26  
   sorting by column position 29  
   sorting by multiple columns 26  
   sorting by unselected columns 29  
   summarizing data in multiple columns 157  
   unique values 16  
 comparison operators  
   inner joins with 59  
   retrieving rows with 32  
   truncated string 38  
 composite indexes 102  
 concatenating  
   query results 85  
   values in macro variables 130  
 conditional operators  
   retrieving rows with 34  
 correlated subqueries 76  
 counting  
   all rows 45  
   duplicate rows 153  
   nonmissing values 45

unique values 44  
 CREATE INDEX statement 102  
 cross joins 68

**D**

data files  
*See* tables  
 data set options  
   creating tables with 93  
   SQL procedure with 127  
 DATA step  
   compared with SQL procedure 3  
   match-merges 71  
 DATE function  
   replacing references to 119  
 DATETIME function  
   replacing references to 119  
 DBMS  
   accessing with SAS/ACCESS 137  
   connecting with LIBNAME statement 138  
   connecting with Pass-Through Facility 140  
 DBMS tables 2  
   PROC SQL views of 139  
   querying 138  
 debugging queries 112  
 DESCRIBE VIEW statement 123  
 DICTIONARY tables 120  
   performance and 126  
   retrieving information about 122  
   using 124  
   views and 120  
 DICTIONARY.COLUMNS 125  
 DICTIONARY.TABLES 124

**E**

errors  
   caused by missing values 46  
   grouping errors caused by missing values 50  
   update errors 98  
 example tables 5  
 EXCEPT operator  
   combining queries 81, 83  
 execution time 114  
 existence of a group of values 77  
 EXISTS condition 77  
 expanded SELECT \* statement 113

**F**

FEEDBACK option  
   expanding SELECT \* statement with 113  
 fields  
   *See* columns  
 files  
   *See* tables  
 filtering grouped data 51  
   HAVING clause versus WHERE clause 52  
   using a simple HAVING clause 51  
   using HAVING clause with aggregate functions 53  
 foreign key 104  
 formats  
   changing column format 100  
   deploying inside Teradata 119  
 FROM clause 12

full outer joins 67

**G**

general integrity constraints 104  
 GROUP BY clause 13  
 grouping data 47  
   by multiple columns 48  
   by one column 47  
   filtering grouped data 51  
   finding errors caused by missing values 50  
   grouping and sorting 49  
   with missing values 50  
   without summarizing 47

**H**

HAVING clause 13  
   aggregate functions with 53  
   filtering grouped data 51  
   filtering grouped data, versus WHERE clause 52  
 hierarchical data  
   expanding in tables 155  
 host-variable references 128

**I**

in-line views 108  
   temporary tables versus 117  
 IN operator  
   multiple-value subqueries and 75  
   retrieving rows 35  
 indexes 102  
   composite 102  
   creating 102  
   creating with CREATE INDEX statement 102  
   deleting 103  
   query performance and 116  
   tips for creating 102  
   unique values 102  
 informats  
   changing column informat 100  
 INNER JOIN keywords 59  
 inner joins 57  
   comparison operators for 59  
   creating with INNER JOIN keywords 59  
   data from multiple tables 63  
   multicolumn joins 62  
   null values and 60  
   order of output 59  
   reflexive joins 64  
   self-joins 64  
   showing relationships within a table 64  
   table aliases 58  
 INOBS= option  
   restricting row processing 112  
 inserting rows 93  
   with queries 95  
   with SET clause 93  
   with VALUES clause 94  
 integrity constraints 103  
   referential 104  
 INTERSECT operator  
   combining queries 81, 84  
 IS MISSING operator  
   retrieving rows 36

## IS NOT MISSING operator

inner joins 61

## iterations

limiting 113

**J**

## joins 56

Cartesian product 57

COALESCE function in 70

combining with subqueries 79

comparing match-merges with 71

comparing with subqueries 117

cross joins 68

inner joins 57

natural joins 69

outer joins 65

reducing size of results 117

specialty joins 68

union joins 69

when to use 80

WHERE expressions with 117

**L**

## labels

changing column labels 100

## left outer joins 65

## libname engines

querying DBMS tables 138

## LIBNAME statement

connecting to a DBMS 138

## libnames

embedding in views 107

## LIKE operator

retrieving rows 37

## logical operators

retrieving rows 33

## LOOPS= option

limiting iterations 113

**M**

## macro facility

SQL procedure with 128

## macro variables 128

concatenating values in 130

creating and using 167

creating from aggregate function results 129

creating from query results 128

creating in SQL procedure 128

creating multiple 129

set by SQL procedure 133

## macros

defining to create tables 131

## match-merges 71

comparing with joins 71

when all values match 71

when position of values is important 73

when some values match 72

## MEAN function

summarizing data 41

WHERE clause with 41

## merging

disabling remerge 120

remerging summary statistics 42

## missing values 3

finding errors caused by 46

finding grouping errors caused by 50

grouping data with 50

overlying 150

replacing in columns 24

retrieving rows and 36

sorting columns with 30

summarizing data with 45

WHERE clause with 38

## multicolumn joins 62

## multiple-value subqueries 75

**N**

## natural joins 69

## nested subqueries 78

## NOEXEC option

syntax checking with 113

## NOT IN operator

multiple-value subqueries and 75

## null values 3

inner joins and 60

**O**

## observations

*See* rows

## ODS destinations 142

## ODS (Output Delivery System)

SQL procedure with 142

## ORDER BY clause 13

omitting 117

query performance and 117

## outer joins 65

full outer joins 67

including nonmatching rows 65, 66

left outer joins 65

right outer joins 66

## OUTER UNION operator

combining queries 81

concatenating query results 85

## OUTOBS= option

restricting row processing 112

## output

adding text to 18

formatting with REPORT procedure 136

## output objects 142

## overlying missing values 150

**P**

## percentages

computing within subtotals 152

## performance

queries 116

## primary key 104

## PROC SQL views

*See also* views

updating 142

## PUT function

deploying inside Teradata 119

optimizing 118

reducing 118

**Q**

qualifying column names 58  
 queries 2  
   adding text to output 18  
   ALL keyword in set operations 117  
   breaking into steps 117  
   combining with set operators 81  
   comparing execution time of two queries 114  
   creating 112  
   DBMS tables 138  
   debugging 112  
   duplicate rows and performance 117  
   in-line views 108  
   in-line views versus temporary tables 117  
   indexes and 116  
   inserting rows with 95  
   limiting iterations 113  
   performance improvement 116  
   restricting row processing 112  
   subqueries 74  
   validating 53  
 query results 2  
   concatenating 85  
   creating macro variables from 128  
   creating tables from 91  
   deleting duplicate rows 16

**R**

records  
   *See* rows  
 referential integrity constraints 104  
 reflexive joins 64  
 relational theory 1  
 relations 1  
 remerging summary statistics 42  
   disabling remerge 120  
 renaming columns 100  
 REPORT procedure  
   formatting SQL output 136  
 reports  
   creating summary reports 158  
 RESET statement  
   resetting SQL procedure options 115  
 resetting options 115  
 retrieving rows 31  
   based on comparison 32  
   identifying columns with missing values 36  
   rows that satisfy a condition 31  
   satisfying multiple conditions 33  
   with a WHERE clause with missing values 38  
   with BETWEEN-AND operators 36  
   with IN operator 35  
   with IS MISSING operator 36  
   with LIKE operator 37  
   with other conditional operators 34  
   with simple WHERE clause 31  
   with truncated string comparison operators 38  
 return codes  
   Pass-Through Facility 141  
 right outer joins 66  
 rows 2  
   *See also* retrieving rows  
   combining data from multiple rows into single row 42  
   counting 45

  counting duplicates 153  
   deleting 98  
   deleting duplicates 16  
   duplicates 117  
   including all 69  
   including all combinations of 68  
   inserting 93  
   inserting with queries 95  
   inserting with SET clause 93  
   inserting with VALUES clause 94  
   matching 69  
   nonmatching 65, 66  
   producing from first or second query 86  
   restricting row processing 112  
   selecting all 67  
   updating all rows with same expression 96  
   updating rows with different expressions 97

**S**

SAS/ACCESS  
   accessing a DBMS 137  
 SAS/ACCESS LIBNAME statement 137  
 SAS/ACCESS views  
   updating 142  
 SAS data files  
   *See* tables  
 SAS data views  
   DICTIONARY tables 120  
 SAS System information 120  
 SASHELP views 120  
   retrieving information about 122  
 SELECT \* statement  
   expanding with FEEDBACK option 113  
 SELECT clause 12  
 SELECT statement 12  
   *See also* WHERE clause  
   FROM clause 12  
   GROUP BY clause 13  
   HAVING clause 13  
   ORDER BY clause 13  
   ordering clauses 14  
   SELECT clause 12  
 self-joins 64  
 SET clause  
   inserting rows with 93  
 set operators  
   ALL keyword 117  
   combining queries with 81  
 single-value subqueries 75  
 sort order 25, 27  
   customized 161  
 sorting data 25  
   by calculated column 28  
   by column 26  
   by column position 29  
   by multiple columns 26  
   by unselected columns 29  
   columns with missing values 30  
   grouping and sorting 49  
 sorting sequence 30  
 SQL 1  
 SQL procedure 1  
   compared with DATA step 3  
   creating macro variables 128  
   creating queries 112

- cumulative time for 114
  - data set options with 127
  - debugging queries 112
  - DICTIONARY tables 120
  - example tables 5
  - formatting output 136
  - macro facility with 128
  - macro variables set by 133
  - ODS with 142
  - resetting options 115
  - syntax checking 113
  - terminology 2
  - timing individual statements 114
  - using tables in other procedures 170
  - SQL Procedure Pass-Through Facility 140
    - connecting to a DBMS 140
    - example 141
    - return codes 141
  - SQLEXITCODE macro variable 133
  - SQLOBs macro variable 133
  - SQLOOPS macro variable 113, 133
  - SQLRC macro variable 134
  - SQLXMSG macro variable 134
  - SQLXRC macro variable 135
  - statistical summaries 40
  - STIMER option
    - timing SQL procedure 114
  - Structured Query Language
    - See* SQL
  - subqueries 74
    - combining with joins 79
    - comparing with joins 117
    - correlated subqueries 76
    - multiple nesting levels 78
    - multiple-value 75
    - single-value 75
    - testing for existence of a group of values 77
    - when to use 80
  - subtotals
    - computing percentages within 152
  - SUM function
    - summarizing data 42
  - summarizing data 40
    - aggregate functions 40
    - aggregate functions, using 40
    - aggregate functions with unique values 44
    - combining data from multiple rows into single row 42
    - displaying sums 42
      - in multiple columns 157
    - remerging summary statistics 42
    - with missing values 45
    - with WHERE clause 41
  - summary functions
    - See also* aggregate functions
    - disabling remerging of data 120
  - summary reports
    - creating 158
  - summary statistics
    - remerging 42
  - sums
    - displaying 42
  - syntax checking 113
- ## T
- table aliases
    - abbreviating column names 58
    - inner joins 58
  - tables 2
    - Cartesian product 57
    - comparing 148
    - copying 93
    - counting duplicate rows 153
    - creating 90
      - creating, like an existing table 92
      - creating from column definitions 90
      - creating from query results 91
      - creating with data set options 93
      - creating with macros 131
      - creating without rows 90
    - DBMS tables 2
      - deleting 103
    - example tables 5
    - expanding hierarchical data 155
    - inserting rows 93
    - integrity constraints 103
    - joining a table to itself 64
    - omitting ORDER BY clause when creating 117
    - selecting all columns 14
    - selecting columns 14
    - selecting specific columns 15
    - SQL tables in other procedures 170
    - SQL tables in SAS 103
    - structure of 17
    - temporary tables versus in-line views 117
    - update errors 98
    - updating all rows with same expression 96
    - updating conditionally 163
    - updating rows with different expressions 97
    - updating values 96
    - updating with values from another table 165
  - temporary tables
    - in-line views versus 117
  - Teradata
    - deploying PUT function and SAS formats 119
  - terminology 2
  - text
    - adding to output 18
  - TIME function
    - replacing references to 119
  - timing procedure statements 114
  - TODAY function
    - replacing references to 119
  - truncated string comparison operators 38
- ## U
- union joins 69
  - UNION operator
    - combining queries 81, 82
  - UNIQUE keyword 102
  - unique values
    - aggregate functions with 44
    - counting 44
    - counting all rows 45
    - counting nonmissing values 45
    - in columns 16
  - updating tables
    - conditionally 163

- errors 98
- updating values 96
  - with values from another table 165
- updating views 107, 142
- user-defined macro variables 128

## V

- VALIDATE statement
  - syntax checking with 113
- validating queries 53
- VALUES clause
  - inserting rows with 94
- variables
  - See* columns
- views 3, 106
  - creating 106
  - deleting 108
  - describing 107
  - DICTIONARY tables and 120
  - embedding libnames in 107
  - in-line 108

- of DBMS tables 139
- omitting ORDER BY clause when creating 117
- PROC SQL views in SAS 110
- SAS data views 120
- SASHELP views 120, 122
- tips for using 109
- updating 107
- updating PROC SQL and SAS/ACCESS views 142

## W

- weighted averages 146
- WHERE clause 13
  - filtering grouped data, versus HAVING clause 52
  - MEAN function with 41
  - missing values with 38
  - retrieving rows conditionally 31
  - summarizing data 41
- WHERE expressions
  - joins with 117
- width
  - changing column width 100

# Your Turn

---

We welcome your feedback.

- If you have comments about this book, please send them to **[yourturn@sas.com](mailto:yourturn@sas.com)**. Include the full title and page numbers (if applicable).
- If you have comments about the software, please send them to **[suggest@sas.com](mailto:suggest@sas.com)**.





# SAS® Publishing Delivers!

Whether you are new to the work force or an experienced professional, you need to distinguish yourself in this rapidly changing and competitive job market. SAS® Publishing provides you with a wide range of resources to help you set yourself apart. Visit us online at [support.sas.com/bookstore](http://support.sas.com/bookstore).

## SAS® Press

Need to learn the basics? Struggling with a programming problem? You'll find the expert answers that you need in example-rich books from SAS Press. Written by experienced SAS professionals from around the world, SAS Press books deliver real-world insights on a broad range of topics for all skill levels.

[support.sas.com/saspress](http://support.sas.com/saspress)

## SAS® Documentation

To successfully implement applications using SAS software, companies in every industry and on every continent all turn to the one source for accurate, timely, and reliable information: SAS documentation. We currently produce the following types of reference documentation to improve your work experience:

- Online help that is built into the software.
- Tutorials that are integrated into the product.
- Reference documentation delivered in HTML and PDF – free on the Web.
- Hard-copy books.

[support.sas.com/publishing](http://support.sas.com/publishing)

## SAS® Publishing News

Subscribe to SAS Publishing News to receive up-to-date information about all new SAS titles, author podcasts, and new Web site features via e-mail. Complete instructions on how to subscribe, as well as access to past issues, are available at our Web site.

[support.sas.com/spn](http://support.sas.com/spn)



THE  
POWER  
TO KNOW®